


73718

GROUP

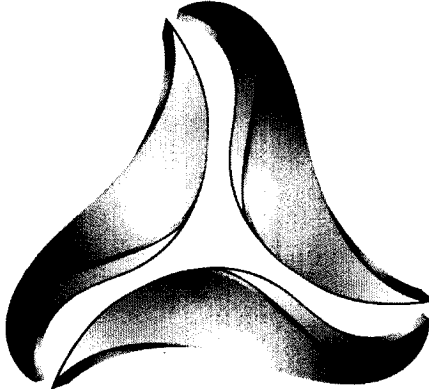

DELTA

Fault Activity Investigation

**Yucca-Argyle Apartments
Champion Site**

**SE Corner of Yucca Street and Argyle Avenue
1756 and 1760 Argyle Avenue
Hollywood District
City of Los Angeles, California**

**September 7, 2014
GDC Project No. LA-1183A**



GROUP DELTA

Riley Realty, LTD
11601 Wilshire Boulevard, Suite 1650
Los Angeles, CA 90025

September 7, 2014

Attention: Mr. Greg Beck

Subject: Fault Activity Investigation
Yucca-Argyle Apartments - Champion Site
SE Corner of Yucca Street and Argyle Avenue
1756 and 1760 Argyle Avenue
Hollywood District, City of Los Angeles, California
GDC Project No. LA-1183A

Dear Mr. Beck,

Group Delta Consultants (GDC) is pleased to submit this Fault Activity Investigation report for the proposed Yucca-Argyle Apartments (Champion Site) in the Hollywood District of the City of Los Angeles. Under the Alquist-Priolo (AP) Earthquake Fault Zoning Act of 1972, the City of Los Angeles, Department of Building and Safety and the California Mining and Geology Board issued a preliminary map showing several inferred "active faults," that are part of the Hollywood fault zone. The Yucca-Argyle project is affected by these faults and therefore requires geologic standard-of-practice investigation. Although the zoning is still preliminary, the City of Los Angeles requires that all sites within the zone be investigated in conformance with the AP Act.

GDC appreciates the opportunity to provide geotechnical and geological services for this project. Should you have any questions, please call at 310 320-5100.

Yours Sincerely,

GROUP DELTA CONSULTANTS, INC.

Michael F. Mills, No. 994, exp. 2/29/16

Engineering Geologist Consultant

Michael D. Reader, P.E., GE

CEO, Principal Engineer

Steven H. Kozlowski, No. 1965, exp. 8/31/15

Engineering Geologist Consultant

Distribution: Addressee (1), LADBS (3)

TECHNICAL SUMMARY

Based on the GDC geologic investigations at and near the proposed Yucca-Argyle Apartments (Champion site), GDC concludes that, from a fault rupture potential viewpoint, the project site is suitable for development.

The investigation included:

- Initial evaluation of published reports, aerial photographs, and other pertinent geologic information; and advancement and interpretation of 13 CPT's and 5 soil cores up to 60 feet deep;
- Observation and documentation of one 120-foot long trench placed between Argyle Avenue and the west side of an existing apartment building (as shown on Plate 1 and Photograph 1 in Appendix C). The trench trended north-south and was typically seven to eight feet deep;
- Owing to the absence of sediments useful for numeric and relative dating of last fault slip at the Champion site, GDC took advantage of its recent investigations of three adjacent sites with trench-exposed sediments that were amenable to numeric and relative dating methods;
- The Champion geologic information was particularly correlated with and, as appropriate, extrapolated to the "Yucca" site, immediately adjacent to the west across Argyle Street.

Principal findings for the Champion site (Site 3) are:

- A layer of artificial fill up to perhaps ten feet thick caps the trench-exposed older alluvium. The older alluvium is estimated to be at least 300,000 years old. These deposits rest on the Miocene-aged Modelo Formation.
- The ~300 ka alluvium has offsets generally less than 2 feet vertically by normal faults. The faulted alluvium caps the older Miocene Modelo Formation, a now-eroded, "high-level" geomorphic surface and is therefore not overlain by Holocene sediments amenable to site-specific dating;
- Both the Site 2 and Site 3 cores and trenches now reveal the presence of a buried anticline (fold) that underlies this site and its surroundings. The folding affects the Modelo Formation and the older alluvium. The "Champion faults" do not extend to Site 2 where only one questionable bedding plane slip surface was encountered. For conservatism, the Site 2 slip surface on the south limb of the anticline is deemed to be a bedding plane slip surface fault. Site 2 trench exposures show that it is covered by unbroken and undeformed sediments and soils (pedogenic profiles) at least ~40 ka;
- Based on site-specific and regional characteristics, the Champion faults most likely are local "bending moment" structures that formed during anticlinal folding. As documented in the peer-reviewed technical literature, these faults are typically not through-going, relatively shallow and non-seismogenic;

- Coupled with the adjacent Yucca investigations, GDC finds that no active (Holocene) faults affect the Champion site. The investigations meet current geologic standards-of-practice in conformance with requirements of the City of Los Angeles and the AP Act. Therefore, from a fault-activity standpoint, the site is suitable for development.

TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
1.1	PROPERTY DESCRIPTION.....	1
1.2	PURPOSE.....	2
1.3	SCOPE OF WORK.....	2
2.0	PREVIOUS and CURRENT INVESTIGATIONS	4
2.1	PREVIOUS INVESTIGATIONS	4
2.2	PRESENT INVESTIGATION	4
2.2.1	CONE PENETRATION TESTS.....	5
2.2.2	CONTINUOUS SOIL CORES	5
2.2.3	TRENCHING	5
2.2.4	SOIL-STRATIGRAPHIC AGE ESTIMATES.....	6
2.2.5	RADIOCARBON DATING	6
3.0	GEOLOGIC FRAMEWORK	7
3.1	REGIONAL GEOLOGIC SETTING.....	7
3.1.1	STRUCTURE	7
3.1.2	HOLLYWOOD FAULT.....	7
3.2	TECTONIC-GEOMORPHIC SETTING	8
3.2.1	REGIONAL ANALYSIS	8
3.2.2	AERIAL PHOTOGRAPH ASSESSMENT.....	9
3.3	LOCAL GEOLOGIC SETTING	9
3.3.1	STRATIGRAPHY	10
3.3.2	ARTIFICIAL FILL (Qaf).....	10
3.3.2	HOLOCENE SAND (Qs) (ARGYLE CHANNEL DEPOSITS; SITE 2)	10
3.3.3	PLEISTOCENE MUDFLOW (Qm); SITE 2 ONLY	10
3.3.4	PLEISTOCENE DEBRIS FLOW UNIT (Qdf); SITE 2 ONLY	10
3.3.5	OLDER ALLUVIUM (Qoal); SITE 3.....	11
3.3.6	MIOCENE BEDROCK (Tm) – SITES 2 AND 3.....	11
3.4	GROUNDWATER	12
3.5	LOCAL STRUCTURE.....	12
3.5.1	YUCCA STREET ANTICLINE.....	12
3.5.2	FAULTS	13
3.5.3	DATE OF LAST FAULT SLIP/FOLDING	13

3.5.4 CAUSATION OF FOLD/FAULTS..... 14

4.0 CONCLUSIONS AND RECOMMENDATIONS..... 15

5.0 LIMITATIONS 15

6.0 REFERENCES 16

LIST OF FIGURES

Figure 1	Site Map Showing Proposed AP Zone
Figure 2	CGS Quaternary Geologic Map
Figure 3	Local Geology Map, Hoots and Kew (1931)
Figure 4	Hollywood Fault Geomorphic Segments, FER 253
Figure 5	Burbank 6' Quadrangle, Showing Geomorphic Features, 1926, Reprint, 1941
Figure 6	Hollywood Fault Geomorphic Features, FER 253
Figure 7	Spence 1930 Oblique Aerial Photo Showing Geomorphic Features
Figure 8	Continental 1954 Aerial Photo Showing Geomorphic Features
Figure 9	Hollywood Fault Segment Plan
Figure 10	Stratigraphic Section
Figure 11	Stereographic Plot of Structural Geologic Elements
Figure 12	Geologic Map

PLATES

Plate 1	Boring, CPT and Trench Locations
Plate 2	Cross Section A-A' (CPT/Soil Core)
Plate 3	Cross-Section B-B' (West Trench)
Plate 4	Cross Section B-B'-B'' (West Trench and Logs)
Plate 5	Cross-Section C-C' (East Trench – East Side)
Plate 6	Cross-Section D-D' (East Trench – West Side)
Plate 7	Cross-Section E-E' (East-West Schematic)
Plate 8	Cross-Section F-F' (Champion Trench)
Plate 9	Cross Section G-G' (Champion CPT/Soil Core)
Plate 10	Cross-Section H-H' (Champion Schematic)

APPENDICES

Appendix A	Field Exploration-CPT Data and Soil Core Logs Site 3
Appendix B	Soil Stratigraphic Age Assessments
Appendix C	Photos of Champion Trench

1.0 INTRODUCTION

This report presents the Group Delta Consultants, Inc. (GDC) Fault Activity Investigation of the “Champion Site” at the southeast corner of Yucca Street and Argyle Avenue in the Hollywood area of the City of Los Angeles. This report provides maps, cross-sections, numeric and relative dating assessments and interpretations consistent with current geologic “standards of practice” applicable to an Alquist-Priolo (AP) Earthquake Fault Investigation. The Alquist-Priolo Act was initiated in early 1972. It requires geologic investigations for faults identified by the California Geological Survey (CGS) as “*sufficiently active and well-defined.*”

Several major California faults have been placed in AP “Earthquake Fault Zones” that require site specific investigations; for example, the San Andreas and the Newport-Inglewood systems. Accordingly, based on ongoing compilation of documented or suspected fault activity, the California Geological Survey (CGS) then places additional faults, now including the Hollywood Fault Zone, in such zones. The inferred fault zones are then reviewed by local geological and other knowledgeable parties. When warranted, the zone is officially approved by the controlling agency, the State Mining and Geology Board.

From literature compilation and independent interpretation, the CGS placed the Hollywood Fault Zone within a Preliminary Earthquake Fault Zone (Figure 1). The map designates this as a “**fault that has had surface or near surface ground rupture within the last 11,500 years (Holocene Epoch)**”. The CGS also postulated individual “active fault” strands within the Hollywood Fault Zone. Of particular interest is a strand, herein informally deemed the “Argyle Strand”, inferred to be immediately south of the Champion site (Site 3, Figure 1). The CGS interpretation stems mainly from groundwater level differentials recorded in two nearby geotechnical borings (GDC, 2006) drilled during a preliminary site engineering investigation, and on topographic expression, namely, a south-facing slope south of the study site (Plate 1; Figure 1).

With the recent (CGS) zonation, site-specific geologic investigations are now required. These investigations must inherently confirm or deny the age and/or existence of any faults on or within 50 feet of the property and must and should follow current “geological standards of practice.” Procedurally, the City of Los Angeles is the lead agency that will approve the investigation. The CGS will review this report and give its opinion to the City of Los Angeles.

1.1 PROPERTY DESCRIPTION

The Champion site (Site 3) is bounded on the north by Yucca Street, on the east by developed property, on the south by Carlos Avenue, and on the west by Argyle Avenue (Plate 1) in the Hollywood District of the City of Los Angeles. Four 2-story apartment buildings currently occupy the site (Photograph 1 in Appendix C). The north side fronts Yucca Street. Block retaining walls

topped with chain link fences bound the south and east margins. An iron fence borders the west property line (Photograph 1 in Appendix C). Parking structures occupy the south part of the pad area north-adjacent to a south-facing, west-trending slope that is about 20 to 25 feet high (Plate 1).

For context, this document refers to four adjacent sites investigated concurrently with the Champion site. These are identified (Plate 1) as: Site 1 for the Millennium development; Site 2 for the second Street Ventures development; Site 3 for this (Champion) development; and Site 4 for the Green development.

1.2 PURPOSE

This investigation specifically evaluates whether CGS inferred strands of the Hollywood Fault Zone constrain redevelopment of Site 3 (Champion). The CGS (2014) preliminarily places the Argyle Strand immediately south of Site 3 (Plate 1; Figure 1) thereby putting Site 3 within a zone of required investigation. The City of Los Angeles also requires similar investigations.

1.3 SCOPE OF WORK

For initial evaluation, GDC advanced continuous and undisturbed soil cores and Cone Penetrometer Tests (CPT) soundings. The rationale was to determine if near-surface faults are present. GDC also reviewed pertinent aerial photographs, geologic and topographic maps, peer-reviewed published articles, and proprietary geotechnical reports available at reviewing agencies. Additionally, GDC reconnoitered the site and its environs for geomorphic evidence of possible surface fault ruptures.

GDC placed 13 CPT-soundings, 5 soil cores and 1 trench (Site 3, Plate 1). The trench, approximately 120 feet long and about 8 feet deep, was used to “calibrate” the cores and CPT-soundings. The trench was also used to examine near-surface sediments, capping soil (pedogenic) profiles, and geologic structure.

Site 3 (Plate 1) is capped by estimated ~300 ka “older alluvium”; accordingly, this deposit was dated by conservative projection across Argyle Avenue into the 35-ft deep trenches in Sites 1 and 2 (Plates 1 through 6). GDC has now completed and submitted its report for the Yucca site, west and immediately adjacent to Argyle Avenue (Site 2; Plate 1). Additionally, GDC is currently finishing geologic documentation for Site 4 (Plate 1) immediately north of Yucca Street. Trench exposures at both sites provided geologic data directly applicable to the Champion site.

For the Champion site, in summary, the GDC investigation included the following:

- Retention of Dr. Roy J. Shlemon to assist GDC with analysis of the local Quaternary geology, soil stratigraphy and paleoseismology; and to provide an independent QA assessment of the investigation (Appendix B). In this report GDC uses the term “soil” as

a pedogenic (weathering) feature and as a tool for dating sediments, and not in reference to engineering material.

- Review and analysis of relevant geotechnical and geologic investigations, published geologic and geotechnical maps and reports. Specific references are documented in Section 6. This includes careful review, interpretation and extrapolation of geologic information from adjacent Sites 1, 2, and 3 (Plate 1).
- Interpretation of vertical stereo and oblique aerial photographs from the 1920's and 1930's archived with the Continental Aerial collection and the Spence collection at UCLA.
- Geomorphological and geologic reconnaissance.
- Coordination with the owner, with Underground Service Alert (USA) and with the City of Los Angeles Department of Building and Safety to locate utilities and to coordinate the logistics of the field investigation.
- Initial site observation to assess existing conditions relative to the planned development. Prior to drilling the soil cores or pushing the CPT's, initial advancement of a soil hand auger to 5 feet was performed to satisfy USA requirements.
- Advancing 13 in-line CPT-soundings up to 60 feet deep along a north-south transect in the center of the property by Gregg Drilling & Testing, Inc. Logs and interpretations of the CPT data are given in Appendix A. Locations are given on Plate 1. Plate 9 is Cross-Section (G-G') interpreted from the 13 CPT-soundings and 5 soil core borings.
- Drilling 5 in-line soil cores to 60 feet between the CPT soundings along the aforementioned north-south transect. This was carried out by Gregg Drilling & Testing, Inc., using an 8-inch diameter hollow stem auger with a 3-inch diameter and 5-foot long split coring barrel down the auger annulus. The recovered cores were placed in 2.5 feet long cardboard core boxes and transported to the GDC laboratory for further examination. Core logs are provided in Appendix A. Locations are indicated on Plate 1.
- Excavating one exploratory trench along the west margin of the site (Photograph 1 in Appendix C). The trench was about 3 feet wide, 120 feet long, and 7 to 8 feet deep. The trench was shored to conform to California OSHA regulations. This trench allowed pertinent extrapolation of soil core and CPT data for analysis of sediments. The excavated soil was stockpiled along the west property line and later used as trench backfill. Location of the trench is indicated on Plate 1 and the log is illustrated on Plate 8.
- Brushing and scraping of the trench walls, setting up of level string lines, and geologic logging and photographing of the trench. The trench was observed at different times by

geologists from the City of Los Angeles Department of Building and Safety and the California Geological Survey.

- Illustration of the subsurface structure and stratigraphy with CPT and soil core logs on geologic Cross-Sections G-G' and H-H' (Plates 9 and 10) and the trench log (Cross-Section F-F') as shown on Plate 8.
- Preparation and summary of GDC findings and conclusions with attachments and appendices.

2.0 PREVIOUS AND CURRENT INVESTIGATIONS

2.1 PREVIOUS INVESTIGATIONS

Previous geological maps, based mainly on geomorphic expression; and also on but few local outcrops, and on ground-water differentials between two or more wells, inferred one or more fault strands that are now included in the "Hollywood Fault Earthquake Zone" (Hoots, 1930; Hoots and Kew, 1931 (Figure 3); Dolan, 1997, 2000; Dibblee, 1988). These maps and the various investigations were recently compiled by the California Geological Survey (CGS) as a draft fault evaluation report (FER 253, 2014) to complement the Preliminary AP map for the Hollywood 7.5' Quadrangle (Figure 1).

The CGS (2014) depicts an inferred active (Holocene) trace of a Hollywood Fault (Argyle Strand; Figure 1) as trending east immediately south of the study site and then northwest across the west-adjacent Site 2. Additionally, as documented in the readily available literature, site-specific fault activity and geotechnical investigations were carried out in the area, similarly addressing potential impact of the Hollywood Fault (Law, 2000; GeoPentech, 2001, 2005; Leighton, 2011; City of Los Angeles, 2009; Langan, 2013).

2.2 PRESENT INVESTIGATION

Thus far few, if any, site specific investigations relied on trench exposures to evaluate the presence and activity-level of a postulated Hollywood Fault. Most assessments were based solely on interpretation of CPT/soil core transects and tectonic-geomorphic modeling. Therefore, this and nearby investigations by GDC (2014) are the first to use trenches to investigate the presence or absence of one or more inferred splays of the Hollywood Fault (CGS, 2014).

The investigation was completed in accordance with the aforementioned scope of work and with current standards of practice for AP-level fault investigations. Field investigation included the following:

2.2.1 CONE PENETRATION TESTS

The site exploration was initially conducted with the CPT soundings and soil cores. CPT's were centered every 10 feet and pushed up to a depth of 60 feet or to refusal. The tip and side resistance of the CPT cone was recorded and plotted on applicable cross-sections (see Plates 1, 2 and 9). CPT field data are contained in Appendix A.

2.2.2 CONTINUOUS SOIL CORES

The soil cores were placed between CPT's to calibrate the subsurface geology. Cores were drilled using an 8-inch hollow stem auger with a 3-inch diameter core barrel. The barrel was placed down the annulus of the augers and pushed about 3 to 4 inches in front of the bit as the auger advanced downward. The barrel was connected and held stationary with respect to the rig rotary head system with a series of rods that pushed the barrel ahead of the bit to prevent the barrel from spinning. This results in a relatively undisturbed continuous core sample. The cores provide a physical view of the subsurface soil conditions used to calibrate the CPT data.

The cores in the upper sandy sediments were drilled in 2.5 foot runs to optimize recovery. Where the drilling recovery exceeded 90%, as in clayey sediments and bedrock, the runs were increased to 5 feet. The cores were placed in boxes, field logged, and returned to the GDC laboratory for detailed logging. After analysis, the core information was combined with the CPT data to calibrate the CPTs to the sediments recovered (Plate 1, Plate 9). The trenches were then used to correlate sediments to the north and south of the trench and along the CPT-soil core transect line (Plate 9, Cross-Section G-G'). Boring Logs are provided in Appendix A.

2.2.3 TRENCHING

2.2.3.1 CHAMPION TRENCH

One fault trench was excavated at the Champion site (Site 3; Plate 1). It was oriented north-south to intersect possible projected splays of the inferred Argyle Strand of the Hollywood Fault Zone as mapped by CGS (2014; Figure 1). Prior to excavation, Underground Services Alert (USA) located all underground utilities. The 120 feet long, 7 to 8 feet deep trench was placed between an existing onsite apartment building and Argyle Avenue (Photograph 1, Appendix C). The trench was shored in accord with CAL-OSHA requirements.

2.2.3.2 YUCCA TRENCHES

Two trenches placed and logged by GDC (2014a) at the Yucca site (Site 2) west of Champion (Figure 1; Plates 1, 3, 5 and 6) proved vital to determine the presence or absence of active faults at Champion.

- **WEST TRENCH**

The west trench was the first of two trenches excavated on the Yucca site. The top 13 feet along the west side of the trench was cut with a 1:1 slope to the first bench. Benches

2 through 4 were excavated with ~4 foot vertical walls to the bottom of the trench. This benching improved the stability of the trench and provided good exposures for logging (Plates 3 and 4). The eastern side of the trench was sloped at 1:1 horizontal to vertical from top to bottom. The trench was up to 35 feet deep.

- **EAST TRENCH**

A second trench was excavated east of the west trench to further evaluate sediment properties and age (Plates 5 and 6). Because the pre-Holocene sediments were shallow, the trench was excavated to a depth of about 15 feet. The older alluvium encountered in the trench was very hard and dense and benched with 4-5 foot vertical walls. The trench was oriented N-S, overlapped the west trench, and extended about 50 feet south of the property line of Site 2 onto Site 1 (Plate 1).

2.2.4 SOIL-STRATIGRAPHIC AGE ESTIMATES

As documented in Appendix B, the west trench exposed the thalweg of the Argyle Channel and an overlying 30-ft thick sequence of interbedded, grossly fining-upward fluvial sediments within the Argyle Channel. Soil-stratigraphic measurements and descriptions show that the Argyle Channel sediments are capped by a remnant, very slightly developed surface soil, and by four, intercalated interval buried paleosols, ranging in relative development from very slight to slight. Based on relative profile development with numerically dated soils elsewhere in Mediterranean climates, the cumulative time of weathering for formation of the channel sediments is an estimated ~8-10 ka years.

The Argyle Channel incises underlying, relatively impermeable clay that bears a truncated, moderately developed buried paleosol. This soil, with its distinct translocated clay films, represents another ~8 ka-15 ka of weathering. Additionally, the abrupt unconformity between the base of the channel and the underlying clay suggests onset of Argyle Channel deposition during an epoch of regional pluviality, conservatively estimated as ~12 ka-16 ka (marine isotope stage 2). From a pedogenic standpoint, the cumulative age of the trench-exposed Argyle Channel and the underlying clay exceeds ~15 ka.

2.2.5 RADIOCARBON DATING

Four conventional radiocarbon dates from the east and west trenches (Yucca-1, Yucca-2, Yucca-4 and Mill-1) in the Argyle Channel sediments were collected (Site 2, Plate 1) to evaluate the numeric age of the Argyle Channel sediments. The west trench samples, Yucca-1 and Yucca-2, are suspect, owing to the high potential for younger contamination by modern groundwater (~4,310 bp), and to the likely re-deposition of older "organic sediment" (~41 ka) resulting in an unreliable old age. In the east trench, sample Yucca-3 could not be dated; Yucca-4 yielded a ~4170 bp age.

The east trench was extended south to evaluate the active fault potential on the adjacent property and to establish a 50 foot buffer zone for this site. Charcoal samples were also collected and identified as Yucca-4 and Mill-1, on the west wall of the east trench. These yielded radiocarbon dates of ~4170bp and ~4280bp, respectively (GDC, 2014). Other samples (Mill-2 though Mill-7) were retained for age assessments of sediments on the adjacent property, site 1 (Plate 1) to the south.

3.0 GEOLOGIC FRAMEWORK

3.1 REGIONAL GEOLOGIC SETTING

3.1.1 STRUCTURE

The Santa Monica Mountains began uplift in the Jurassic; and intermittent tectonic movement continues to the present (Hoots, 1930; Hoots and Kew, 1931; Dibblee, 1991). By the middle Miocene, deformation affected the Topanga sediments, resulting in simple, west-plunging folds. Later, in response to continued movement of San Andreas plate boundary faults, high-angle normal offset gave rise to an incipient Hollywood Fault Zone.

Periodic faulting since the late Miocene produced more complex deformation. In the study area, the southeastern limbs of local folds were “down-dropped” along the Hollywood Zone. By the onset of the Quaternary, many folds were buried by episodic, climatically controlled alluvial deposits that covered most of the study area. Starting at least by mid-Quaternary time, the surface expression of local left-lateral and thrust faults were generally buried by continuing region-wide alluviation. Topographic relief locally exceeded 50 ft, generally expressed by major south-trending canyons that incised the alluvial cap(s), only to be filled and again partially filled in response to regional change in climate.

3.1.2 HOLLYWOOD FAULT

The Hollywood Fault Zone forms the general boundary separating the LA Basin (Hollywood Sub-basin) from the Transverse Ranges on the north and the Peninsular Ranges on the south. From west to east, the Hollywood Fault is generally divided into five segments all characterized by left-lateral oblique slip (Figure 9). The eastern terminus of Segment 2 and the western terminus of Segment 3 are north-east of the site of this study (FER 253). The part of Segment 2 that is inferred (CGS, 2014) to trend south of Site 3 is deemed the “Argyle Strand.”

The location and relative activity of the Hollywood Fault segments stems mostly from the investigations of Dolan (1997, 2000) who based his conclusions mainly on geomorphic expression, on possible offset of alluvial fans flanking the southern Santa Monica Mountains, on previous geotechnical studies by LA Metro, and on differences in groundwater levels as depicted in geotechnical borings.

When drilling in 2006, GDC encountered groundwater in B-1 and B-2 at depths of 24 and 44 feet, respectively. In the west trench, GDC found that the mudflow was wet near and below the contact with the Argyle Channel Deposits at ~27 feet below ground surface (bgs). Free water occurred at about ~35 feet bgs.

Based on the California Division of Mines and Geology (CDMG) Open-File Report 98-026, the historic highest groundwater at the Yucca site was more than 80 feet. Because the site is on the toe of the hills to the north and underlain by interbedded alluvial sediments, it is not unusual for perched groundwater elevations to vary significantly. From the site-specific trench exposures, we document and thus conclude that differing groundwater levels in the geotechnical borings stem from local perching on the several different subsurface clayey beds.

The east and west trench exposures also explain the origin of an apparent 20-ft vertical offset of piezometric surfaces recorded in adjacent, on-site geotechnical borings. This separation was the likely basis for the CGS postulated presence of a Hollywood Fault, "Argyle Strand" (CGS, 2014). Again, from the site-specific trench exposures, GDC documents that the local perched water levels are not caused by any inferred fault.

3.2 TECTONIC-GEOMORPHIC SETTING

3.2.1 REGIONAL ANALYSIS

Hoots and Kew (1931; Figure 3) initially identified a "bedrock fault" about 2000 feet north of Site 3 (Figure 3) that is inferred to be a strand of the Hollywood Fault Zone. The fault characteristically superposed Miocene Topanga Formation rocks over the younger upper Miocene Modelo Formation (Hoots and Kew, 1930).

Recently, fault locations have been based on tectonic geomorphic expression (CGS, 2014; Crook and others, 1983; Dolan and others, 2000; Dolan and Pratt, 1997; Dolan and others, 1997; Tsutsumi and others, 2001; U.S. Geological Survey, 2005). It is the trench exposures that best provide locations as well as relative activity information useful for dating last time of surface rupture.

GDC analyzed the geomorphic and topographic expression of the northern Los Angeles Basin/Hollywood area that encompasses Site 3 and its environs. We find, for example, that the USGS Burbank 7.5' Quadrangle (1926 edition; reprinted in 1941) depicts west-to-east topographic breaks and truncated ridges that mark the traditional trend of the Hollywood Fault near Site 3 (Figures 5, 7 and 8). Presumably, the topography stemmed from surface rupture. However, the GDC investigations of Sites 1, 2, and 4 show that the truncated ridge immediately south of Site 3 is erosional in origin and not fault related.

From the geomorphic expression, as well as from trench exposures and core data, we reconstruct general landscape evolution in the area over the past ~300 ka. In brief, throughout the

Quaternary, regional changes in climate and vegetation resulted in deep channel cutting, partial alluvial filling and locally later re-incision.

The most recent regional depositional event is expressed geomorphically by late Pleistocene and Holocene alluvial fans that emerge from the mouths of three canyons at Argyle Avenue, Vine Street and Beachwood Drive. These are informally called the “Argyle,” “Cahuenga” and “Beechwood” fans, respectively (Figure 6). As exposed in the Yucca (Site 2) trenches, the Argyle Fan includes a distinct basal channel (thalweg and basal gravel beds) and overlying mid-Holocene distributaries. The eastern distributaries lapped against a now-buried “channel wall” mantled with older mud- and debris-flow deposits (Plate 2).

A pre-Holocene channel similarly extended immediately southwest of the Champion site as sediments exposed in the Yucca east trench and in adjacent cores. The channel incised into the base of the ~300 ka “old alluvium” (Qoal) that once extended across the entire area but is now surficially preserved only at Champion site. The eastern boundary of this old channel was then filled with likely climatically controlled upslope and sideslope debris flows (Qdf). These in turn, were remobilized to give rise to their locally covering mudflows (Qm). As shown in the Yucca trenches, the mudflows typically mantle the debris flows and underlie the basal Argyle (Holocene) channel deposits (Plate 2, Cross-Section A-A).

3.2.2 AERIAL PHOTOGRAPH ASSESSMENT

GDC also interpreted aerial photographs to evaluate possible presence of Hollywood Fault strands (Dolan and others, 1997, 2000, 2000a) that potentially could affect the Champion site (Site 3). Specifically reviewed were oblique aerial photos from the UCLA Benjamin and Gladys Thomas Air Photo archives and Continental Aerial Photo collections. The aerial photographs show that the area south of the truncated ridges, usually given as evidence of fault surface breaks, was graded and developed prior to the dates of the flights thereby eliminating geomorphic expression of inferred faulting in the immediate area.

The aerial photos do, however, depict a distant break in slope near Franklin Avenue, an area thus suspect for possible surface rupture (Figures 7 and 8).

3.3 LOCAL GEOLOGIC SETTING

Site 3 (Champion) lies on pre-Holocene older alluvium that rests on bedrock of the Modelo Formation (Figures 10 and 12). The older alluvium, and to some degree the underlying Modelo Formation, form the west facing slope of Argyle Canyon. After channel incision, younger deposits, useful for determining fault ages, were laid down in Argyle Channel, including Pleistocene debris flows (Qdf) and mudflows (Qm); and, finally, the Holocene sand deposits (Qs).

None of the younger sediments useful for dating last fault slip were exposed at Site 3. However, their presence at the Yucca (Site 2) trenches permits conservative projection of Champion fault

trends into the Yucca site where trenches expose a suite of sediments useful for soil-stratigraphic and numeric dating.

3.3.1 STRATIGRAPHY

Importantly, because the Site 3 trench logs document the presence of several post-older alluvium faults (Plate 8), it is therefore the detailed stratigraphy exposed in the adjacent Yucca that dates last movement of the Site 3 faults (Figure 10). From the youngest to the oldest, the dated Yucca site (Site 2) units are: Holocene sands of the Argyle Channel (Qs), locally discontinuous mudflows (Qm); upslope and side-slope debris flow flows (Qdf); basal sections of older alluvium (Qoal) and the underlying Modelo Formation (Tm).

3.3.2 ARTIFICIAL FILL (Qaf)

Surficial artificial fill blankets most of the explored area at Champion. In general, where encountered, the fill excavated with little difficulty. Near the south end of the Champion trench, however, utility trench pipes and fill constrained but did not stop exploration.

3.3.2 HOLOCENE SAND (Qs) (ARGYLE CHANNEL DEPOSITS; SITE 2)

As documented on the Yucca trench logs (Plates 2 through 6), the Holocene Argyle Channel Deposits (Qs) vary from loose to moderately dense and display graded bedding. Sub-rounded to sub-angular sands and gravely sands that are uncemented to lightly cemented are common. The sands and gravels are mainly basaltic and meta-quartzite with occasional granitic pebbles and cobbles. The granitic pebbles and cobbles are mostly decomposed to angular gruss that disintegrates when dislodged. The sand ranges from fine- to coarse-grained with occasional pebbles and rare cobbles and weathered silty soil horizons. Gravels and cobbles are usually basal or lag gravels along unconformities and channel floors. Channeling is common throughout the sedimentary packets in the upper sand. The clastic sands and gravels contain slightly developed paleosols indicative of relative landscape stability (Appendix B).

3.3.3 PLEISTOCENE MUDFLOW (Qm); SITE 2 ONLY

A discontinuous mudflow (Qm) was exposed below the Argyle Channel Deposits in both the west and east Yucca trenches (Plates 2 through 6). Based on soil-stratigraphic assessments (Appendix B), remnant mudflows bear paleosols ranging in age from ~12 ka-15 ka up to ~35 ka-40 ka. The mudflows were derived from reworking and redeposition of the underlying and adjacent debris flows that were particularly exposed in the Yucca east trench (Plates 5 and 6).

3.3.4 PLEISTOCENE DEBRIS FLOW UNIT (Qdf); SITE 2 ONLY

The debris flow deposits (Qdf) underlie the mudflows (Qm). Stratigraphically, they are below the older alluvium at Site 3 (Figure 10). Based on stratigraphic position and reconstruction of local

geomorphic evolution, these sediments, *in toto*, are an estimated ~150 ka old and are the youngest faulted and folded beds within Site 2 or 3.

These debris flows are typically moderately to poorly sorted clays, sands, and gravel. Clasts within the beds are usually chaotically arranged. Distinct interspersed silty beds and paleosols allow for clear recognition of the presence or absence of faults.

3.3.5 OLDER ALLUVIUM (Qoal); SITE 3

The Site 3 (Champion) trench exposed older alluvium composed of consolidated non-marine sand, silt and gravel beds. Based on the CPT-soil core transect (Plate 9, Cross Section G-G'), the older alluvium lies unconformably on the Miocene Modelo Formation and varies in thickness from about 7 feet deep in the north to greater than 60 feet in the south.

The older alluvium is a vestige of a once extensive alluvial plain later incised by local south-trending canyons. The older alluvial deposits are judged to be about 300 ka old (Appendix B).

Distinctly bedded gravelly, sandy, and reddish silty beds typify the older alluvium. Generally, alternating sequences include coarse-grained, sometimes cobbly, sand overlain by finer grained silt beds (Photograph 2 in Appendix C). These provide excellent key beds for determining the presence or absence of faults.

In summary, based on a great degree on stratigraphy exposed in the Yucca trenches, GDC reconstructed a regional model for landscape evolution and age for the Site 3 trench-exposed sediments (Section 3.2.1).

3.3.6 MIOCENE BEDROCK (Tm) – SITES 2 AND 3

Miocene Modelo Formation underlies the Champion site as mapped by Hoots and Kew (1931). Borings and CPT-soundings (Plate 9) show that it is overlain by older alluvium and artificial fill for about 13 feet in the north and greater than 60 feet in the south (Plate 9).

The Modelo Formation within the Santa Monica Mountains is generally soft, light-gray to brown, well bedded shale with isolated hard platy siliceous shale and massive to thin beds of sandstone, siltstone and massive conglomeratic sandstones. Volcanic ash is also locally present.

At Site 3, the upper weathered Modelo is plastic to stiff and lacks sedimentary and pedological structure. With depth, the Modelo Formation is gradually less saturated; and grades to dark gray to black, thinly bedded fine sand, clay, and moist hard clayey shale. Carbonate filled macro-fractures were not evident.

3.4 GROUNDWATER

All five Site-3 borings encountered groundwater; Borings 1 through 4; at 30, 27, 28, and 31 feet bgs, respectively, and Boring 5 at 45 feet bgs. GDC plotted the inferred potentiometric surface on Cross-Section G-G'. It is not clear from available information whether this represents a perched or actual regional water surface. From Boring 1 to immediately north of Boring 4 (Plate 9) the surface is not "offset" by some heretofore unknown fault. South of Boring 4, the piezometric mimics the steepening contact between the older alluvium-bedrock (Plate 9).

3.5 LOCAL STRUCTURE

3.5.1 YUCCA STREET ANTICLINE

Investigations of the Champion (Site 3) and nearby properties to the west and north, respectively (Sites 2 and 4), show an anticline with an axis almost coincident with Argyle Avenue (Plate 1). This structure is a low amplitude local fold; although, alternatively, it might be the "crest" of a larger regional anticline. A more complete characterization awaits more data from other investigations in the central Hollywood area. For description, GDC deems the fold as the "Yucca Street Anticline."

The Yucca Street Anticline was first recognized in Site 3 and 4 trenches (Plates 1, 8, and 10). The Site 3 trench exposed near-horizontal older alluvium in the north (near Yucca Street) that increasingly dips 15 to 30+ degrees to the south in the southern part of the trench (Plates 1 and 8). Trenches on the Site 2 (Plates 3, 5, and 6) revealed south-dipping Pleistocene debris flows younger than the Site 3 older alluvium. In contrast, exposures north of Yucca Street exposed north-dipping older alluvium, thereby defining an anticline with an axis about coincident with Yucca Street. The general geologic relationships are schematically illustrated in Plate 10.

Based on the site-specific exposures and from models of such folds, GDC reasonably infers that the anticline owes its origin mainly to regional transpression and not to local faulting. This reasoning is exemplified in Site 2 Cross-Sections A-A' (Plate 2) and B-B'B" (Plate 4) that depict the folded sediments and their relation to overlying - and unbroken - upper Pleistocene and Holocene deposits. Additionally, stratigraphic form lines inferred to be representative of bedding within the Modelo Formation suggest that the axis trends west-northwest (Plate 1). A stereonet plot of the bedding attitudes at Champion and to some north of the site are consistent with a fold that trends west-northwest (Figure 11).

3.5.2 FAULTS

The Site 3 trench exposed several low-displacement normal-slip faults with stratigraphic separations of less than about 2 feet (Plates 8, 9 and 10). Photograph 3 in Appendix C illustrates a typical Champion fault. The light tan sand bed in the photograph has slipped down to the left about one foot along a normal fault that trends from upper right to lower left of the photograph. The fault dips to the north and the sand bed to the south.

These are classic “bending-moment” faults stemming solely from localized stress fields that are active only during the folding event(s) (Billings, 1956; Zolnai, 1986; Yeats 1986). At Site 3, the normal faults dip characteristically north toward fold axis near Yucca Street; and north of the site, faults dip south toward the axis. Faults such as these are shallow-rooted aseismic normal faults that form on the upper surfaces of anticlines as portrayed in Figure A from Yeats (1986).



Also present in the Site 3 trench (Plate 8) are scattered well-developed joints that plot on the stereograph (Figure 11) as possible complements.

Billings (1956) depicted similar faults as “shear joints” along which relative small displacements occur (Figure B). The dominant strikes of both the Site 3 and Site 4 faults are northeast-southwest. Assuming the fault attitudes measured near the ground surface in the trenches represent the entire fault planes, the principal trends are not parallel to the anticline axis. This suggests that stress also involved some lateral shear; and this, too, is consistent with the Billings models.

The Champion faults do not extend to the Site 2 trenches or CPT-soil core cross-sections. GDC thus concludes that the Site 3 trench faults either do not displace the Site 2 sediments that are, minimally, 35 ka; or are geographically limited to the anticline crest and die out laterally.

3.5.3 DATE OF LAST FAULT SLIP/FOLDING

Growth of the fold and slip along the Champion bending-moment faults ceased prior to at least ~35 ka based on trench documentation in the adjacent Yucca (Site 2) area. Geologic data from Sites 2 and 4, to the west and north, respectively, provide data to determine the likely cause and age of the Champion faults. For example, as shown on Plates 3 through 6, no Champion-projected faults were documented. Rather, the single slip-surface and a fold limb are now shown

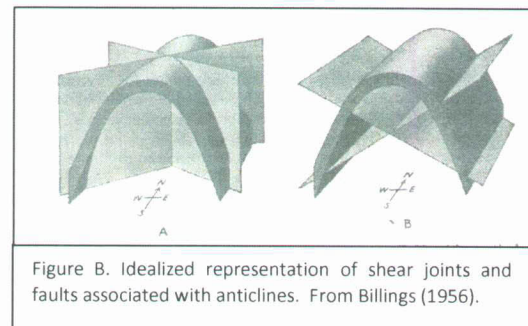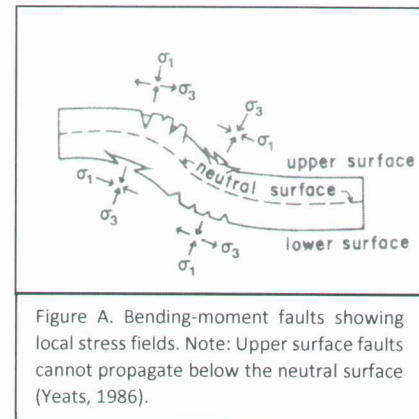

to be demonstrably overlain by an unbroken or folded mudflow (Qm) that bears a remnant buried paleosol at least 30-35 ka (Appendix B).

In sum, the upper Pleistocene mudflows and overlying Argyle sand are not disrupted by either faults or folds. Therefore, even conservatively, the displacements of the Champion older alluvium took place prior to 30-35 ka; and therefore the faults are not active according to Alquist-Priolo definitions.

3.5.4 CAUSATION OF FOLD/FAULTS

Owing to the paucity of regional deep subsurface information, the kinematics for the formation of the Yucca Street Anticline remain enigmatic. However, the GDC investigations now provide much new information regarding evolution of the Hollywood Fault system.

Several hypotheses might explain origin of the Yucca Street Anticline. One is that it is a local fold on the upper plate of a south-vergent thrust fault. Recent GDC investigations at Sites 1 and 2 (GDC, 2014, and in preparation) placed trenches, borings and CPT-lines across reasonable northwest and west projections of a postulated fault near the base of an escarpment along Carlos Avenue, east of Argyle Avenue. The explorations exposed or encountered only unbroken upper Pleistocene (Appendix B) sediments; any faults therefore are demonstrably pre-Holocene. It follows then that the escarpment owes its presence to geological processes other than fault surface rupture along a footslope fault.

A second hypothesis is that the anticline originated from a short duration perturbation in the stress-strain pattern along the Hollywood Fault. Inferentially, a short term pulse of compression might have led to folding; or, rather, the fold is

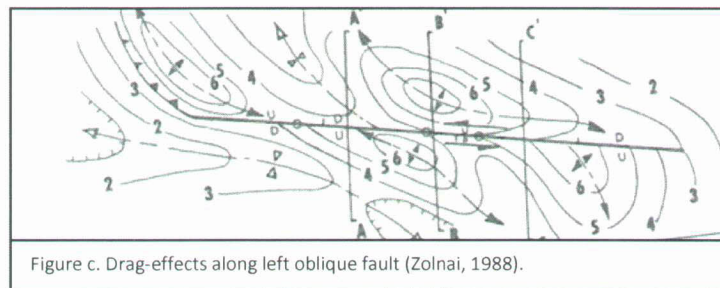


Figure c. Drag-effects along left oblique fault (Zolnai, 1988).

part of the strain along an oblique fault, such as the Hollywood Fault. Figure C in accordance with Zolnai (1988) is one of several graphical renditions of this model.

4.0 CONCLUSIONS AND RECOMMENDATIONS

Based on a trench exposure and detailed investigations of Site 3 and three adjacent properties in the Yucca-Argyle area of Hollywood that included fault trenches, CPT-soundings and soil cores, GDC concludes that:

1. The Champion site (Site 3) is underlain by ~300 ka "old alluvial" deposits that are tilted ("Argyle Street anticline") and locally displaced ~1-2 ft by generally vertical faults. These faults cannot be dated (time of last movement) onsite owing to a lack of younger, covering sediments.
2. The Champion faults are, however, dated by reasonable projection into the trench exposures at the Yucca site (Site 2), across Argyle Street to the west.
3. A fold limb and a slip surface exposed in the east Yucca trench is covered by a horizontal, unbroken mudflow that bears a moderately developed paleosol estimated to be at least ~30 ka old. The mudflow, in turn, is overlain by another ~12 k sequence of "Argyle Channel" sand; thus indicating that last site-specific deformation occurred prior to at ~40 ka ago.
4. Based on structural modeling, the Champion faults most likely originated as near-surface tensional slip during folding of the Yucca Street anticline. Accordingly, such faults are typically neither seismogenic nor of regional extent, reasonable scenarios documented by exposures in the nearby Yucca trenches.
5. Last displacement of the Champion site faults therefore took place prior to the Holocene, and hence are "not active" according to present State of California definition.

5.0 LIMITATIONS

The overall assessment of the geologic and fault hazard conditions, in this report, reflects GDC's professional opinions and is intended for the use by Riley Realty, LTD, and its design consultants. This report has been prepared solely for assessing seismic hazard impact on the proposed development and may not contain sufficient information for environmental (hazardous waste) and geotechnical (foundation) purposes for this study. The recommendations shall not be extrapolated to areas not covered by this report, or used for other facilities, without the review and approval of GDC and from Riley Realty, LTD. This report or any portion of this report may be provided to state, county or city agents for informational purposes only.

The GDC investigation and evaluations were performed in accordance with generally accepted local standards using that degree of care and skill ordinarily exercised under similar circumstances by reputable engineering geology and geotechnical consultants practicing in this or similar localities. No other warranty, expressed or implied, is made as to the professional advice included in this report.

6.0 REFERENCES

Billings, M.P., 1956, Structural geology: Prentice-Hall, Inc., Englewood Cliffs, New Jersey, 514p.

Bryant, W. A., (compiler), 2005, "Digital Database of Quaternary and Younger Faults from the Fault Activity Map of California, Version 2.0," California Geological Survey Web Page.http://www.conrv.ca.gov/CGS/information/publications/QuaternaryFaults_ver2.htm

California Division of Mines and Geology, 1999, "State of California Seismic Hazard Zones, Hollywood Quadrangle Official Map", released March 25, 1999, scale 1"=2000'.

California Geological Survey, 2014, "Fault Evaluation Report, FER 253," The Hollywood Fault in the Hollywood 7.5' Quadrangle, Los Angeles County, California by Hernandez, J. and Treiman, J., Fault Evaluation Report (FER) 253.

California Geological Survey, 2003, Geology map of the Los Angeles 30x60 degree Quadrangle, California, scale 1:100,000

Crook, R., Jr., Proctor, R. J., and Lindvall, E.E., 1983, "Seismicity of the Santa Monica and Hollywood Faults Determined by Trenching," Technical Report to the U.S. Geological Survey, Contract No. 14-08-001-20523, 26p.

Crook, R., Jr., and Proctor, R. J., 1992 "The Santa Monica and Hollywood Faults and the Southern Boundary of the Transverse Ranges province, in *Engineering Geology Practice in Southern California*, b. Pipkin and R. Proctor (Editors, Star Publishing Company, Belmont California.

Crouch, J. K., and J. Suppe, 1994, "Late Cenozoic tectonic evolution of the Los Angeles basin and Inner California Borderland: A model for core-complex-like crustal extension," *Geol. Soc. Am. Bull.*, 105, p. 1415–1434.

Dibblee, T.W. and Ehrenspeck, H.E., ed., 1991, Geologic map of the Hollywood and Burbank (south 1/2) quadrangles, Los Angeles, California: Dibblee Geological Foundation, Map DF-30, scale, 1:24000.

Dolan, J.F., Sieh, K., and Rockwell, T.K., 2000, "Late Quaternary activity and seismic potential of the Santa Monica fault system, Los Angeles, California," *Geol. Soc. Am. Bull.*, v. 112, p. 1559-1581.

Dolan, J. F., Stevens, D., and Rockwell, T. K., 2000, "Paleoseismologic Evidence for an Early to Mid-Holocene Age of the Most Recent Surface Fault Rupture on the Hollywood Fault, Los Angeles, California," *Bulletin of the Seismological Society of America*, Vol. 9, N. 2, p. 334-344.

Dolan, J.F and Pratt, T.L., 1997, "High-Resolution Seismic Reflection Profiling Of the Santa Monica Fault Zone, West Los Angeles, California," *Geophysical Research Letters*, Vol. 24, No. 16, pp. 2051-2054.

Dolan, J. F., Sieh, K. E., Rockwell, T. K., Gupatil, P., and Miller, G., 1997, "Active Tectonics, Paleoseismology, and Seismic Hazards of the Hollywood Fault, Northern Los Angeles Basin, California," *Geological Society of America Bulletin*, Vol. 109, No. 12.

Dolan, J. F., Sieh, K., Rockwell, T. K. Yeats, R.S., Shaw J., Suppe, J., Huftile, G., and Gath, E., 1995, "Prospects for Larger or More Frequent Earthquakes in the Los Angeles Metropolitan Region, California," *Science*, Vol. 267, pp. 199-205.

Dolan, J. F. and Sieh K., 1992, "Tectonic Geomorphology of the Northern Los Angeles Basin: Seismic Hazards and Kinematics of Young Fault Movement," in Ehlig, P.L., and Steiner, E.A., eds., *Engineering Geology Field Trips: Orange County, Santa Monica Mountains, and Malibu*, Guidebook and Volume: Berkeley, California, Association of Engineering Geologists, p. B-20-26.

Dolan, J. F. and Sieh, K., 1992, "Paleoseismology and Geomorphology of the Northern Los Angeles Basin: Evidence for Holocene Activity on the Santa Monica Fault and Identification of New Strike-Slip Faults through Downtown Los Angeles," *EOS, Transactions of the American Geophysical Union*, Vol. 73, p. 589.

GeoPentech, 2001a, "Potential Fault Surface Rupture Hazard and Proposed Development at 1840 Highland Site, Hollywood District, Los Angeles, CA," Project No. 00010C, dated January 24, 2001.

GeoPentech, 2001b, "Addendum 1 to January 24, 2001 Report: Potential Fault Surface Rupture Hazard and Proposed Development at 1840 Highland Site, Hollywood District, Los Angeles, CA," Project No. 00010C, dated August 20, 2001.

GeoPentech, 2013a, "Review of Faulting Issues at 1805 Highland Avenue Adjacent to the Hollywood United Methodist Church, Hollywood District, Los Angeles, CA," Project No 12043A, dated January 25, 2013.

GeoPentech, 2013b, "Fault Investigation 'Phase 1', 1805 Highland Avenue, Hollywood United Methodist Church, Los Angeles, CA," Project No. 12043A, dated June 24, 2013.

GeoPentech, 2013c, "Response to the City of Los Angeles Department of Building and Safety, Geologic Report Correction Letter," dated August 27, 2012, and "Addendum No. 5 to January 24, 2001 Report, Potential Fault Surface Rupture Hazard and Proposed Development at 1840 Highland Site, Hollywood District, Los Angeles, CA," Project No. 08020A, dated July 2, 2013.

Geotechnologies, Inc., 2006, "Geotechnical Engineering Investigation, Proposed BLVD6200 Development, 6200 Hollywood Boulevard, Hollywood, CA, File No. 18969," dated August 14, 2006.

Group Delta Consultants, Inc., 2006, "Preliminary Geotechnical Report, Proposed High Rise Residential Development, 6230 Yucca, Street, Hollywood, Ca."

Group Delta Consultants, Inc., 2014a, "Fault Activity Investigation," Second Street Venture Project, SW corner of Yucca Street and Argyle Avenue, Hollywood area, City of Los Angeles, California, Project No. LA-1161-A.

Group Delta Consultants, Inc., 2014b, "Fault Activity Investigation," 1800 Argyle Avenue, Hollywood area, City of Los Angeles, California, Project NO. LA-1175-A.

Hoots, H.W., 1930, "Geology of the eastern part of the Santa Monica Mountains, Los Angeles County," U.S. Geological Survey Professional Paper 165, p. 83 -134, scale 1:24,000.

Hoots, H.W. and Kew, 1931, "Geology of the eastern part of the Santa Monica Mountains, Los Angeles County," U.S. Geological Survey map scale 1:24,000.

Jennings, C.W., 1994, Fault Activity Map of California and Adjacent Areas, California Division of Mines and Geology Data Map 6.

Langan, 2011, "Preliminary Geotechnical Engineering Study, Millennium Hollywood Development, Hollywood California."

Langan, 2012, "Fault Investigation Report, Hollywood Development, Vesting Tentative Tract 71830, Hollywood, California." [as above]

Law/Crandall, 2000, "Report of Fault Rupture Hazard Investigation, 1840 North Highland Avenue, Hollywood District, Los Angeles, California".

Los Angeles, City of, 1996, "Safety Element of the Los Angeles City General Plan," Department of City Planning, Los Angeles, California. Los Angeles, County of, 1990, "Technical Appendix to the Safety Element of the Los Angeles County General Plan," Draft Report by Leighton and Associates with Sedway Cooke Associates.

Shaw, J.H., and Suppe, J, 1996, "Earthquake hazards of active blind-thrust faults under the central Los Angeles Basin," *Journal of Geophysical Research*, 101, p. 8623-8642.

Sylvester, A.G., 1988, "Strike-slip faults," *Geological Society of America Bulletin*, v. 100, p. 1666-1703.

Tsutsumi, H., Yeats, R. and Huftile, 2001, "Cenozoic tectonic of the northern Los Angeles Fault system, California," *Geological Society of America Bull.*, V. 1133, No. 4, P. 454-468.

United States Geological Survey and California Geological Survey, 2005, Preliminary Geologic Map of the Los Angeles 30' X 60' Quadrangle, Southern California," 2005, Version 1.0 scale 1:100,000.

Woodring, W.P., Bramlette, M.N., and Kew, W.S.W., 1946, "Geology and paleontology of the Palos Verdes Hills, California," U. S. Geological Survey, Professional Paper 207, 145 pp.

Wright, T.L., 1991, "Structural geology and tectonic evolution of the Los Angeles Basin, California, in Active Margin Basins," edited by K.T. Biddle, American Association of Petroleum Geologists *Memoir* 52, 35-134.

Yeats, R.S., 1986, Active faults related to folding, *in*, Active tectonics: National Academy Press, Washington D.C., p. 63-79.


Yerkes, R.F., McCulloh, T.H., Schoellhamer, J.E., and Vedder, J.G., "Geology of the Los Angeles basin, California – An introduction," U.S. Geological Survey Professional Paper 420-A, 57 pp.

Ziony, J.I., and Yerkes, R.F., 1985, "Evaluating earthquake and surface faulting potential," in Ziony, J.I., ed., "Evaluating earthquake hazards in the Los Angeles region--An earth-science perspective." U.S. Geological Survey Professional Paper 1360, p. 43-91.


Zolnai, G., 1988, Continental wrench-tectonics and hydrocarbon habitat: American Association of Petroleum Geologists, Continuing Education Course Note Series, #30, Nice, France, 38 pp., illustrations.

FIGURES

- Figure 1 Site Map Showing Proposed AP Zone
- Figure 2 CGS Quaternary Geologic Map
- Figure 3 Local Geology Map, Hoots and Kew (1931)
- Figure 4 Hollywood Fault Geomorphic Segments, FER 253
- Figure 5 Burbank 6' Quadrangle, Showing Geomorphic Features, 1926, Reprint, 1941
- Figure 6 Hollywood Fault Geomorphic Features, FER 253
- Figure 7 Spence 1930 Oblique Aerial Photo Showing Geomorphic Features
- Figure 8 Continental 1954 Aerial Photo Showing Geomorphic Features
- Figure 9 Hollywood Fault Segment Plan
- Figure 10 Stratigraphic Section
- Figure 11 Stereographic Plot of Structural Geologic Elements
- Figure 12 Geologic Map

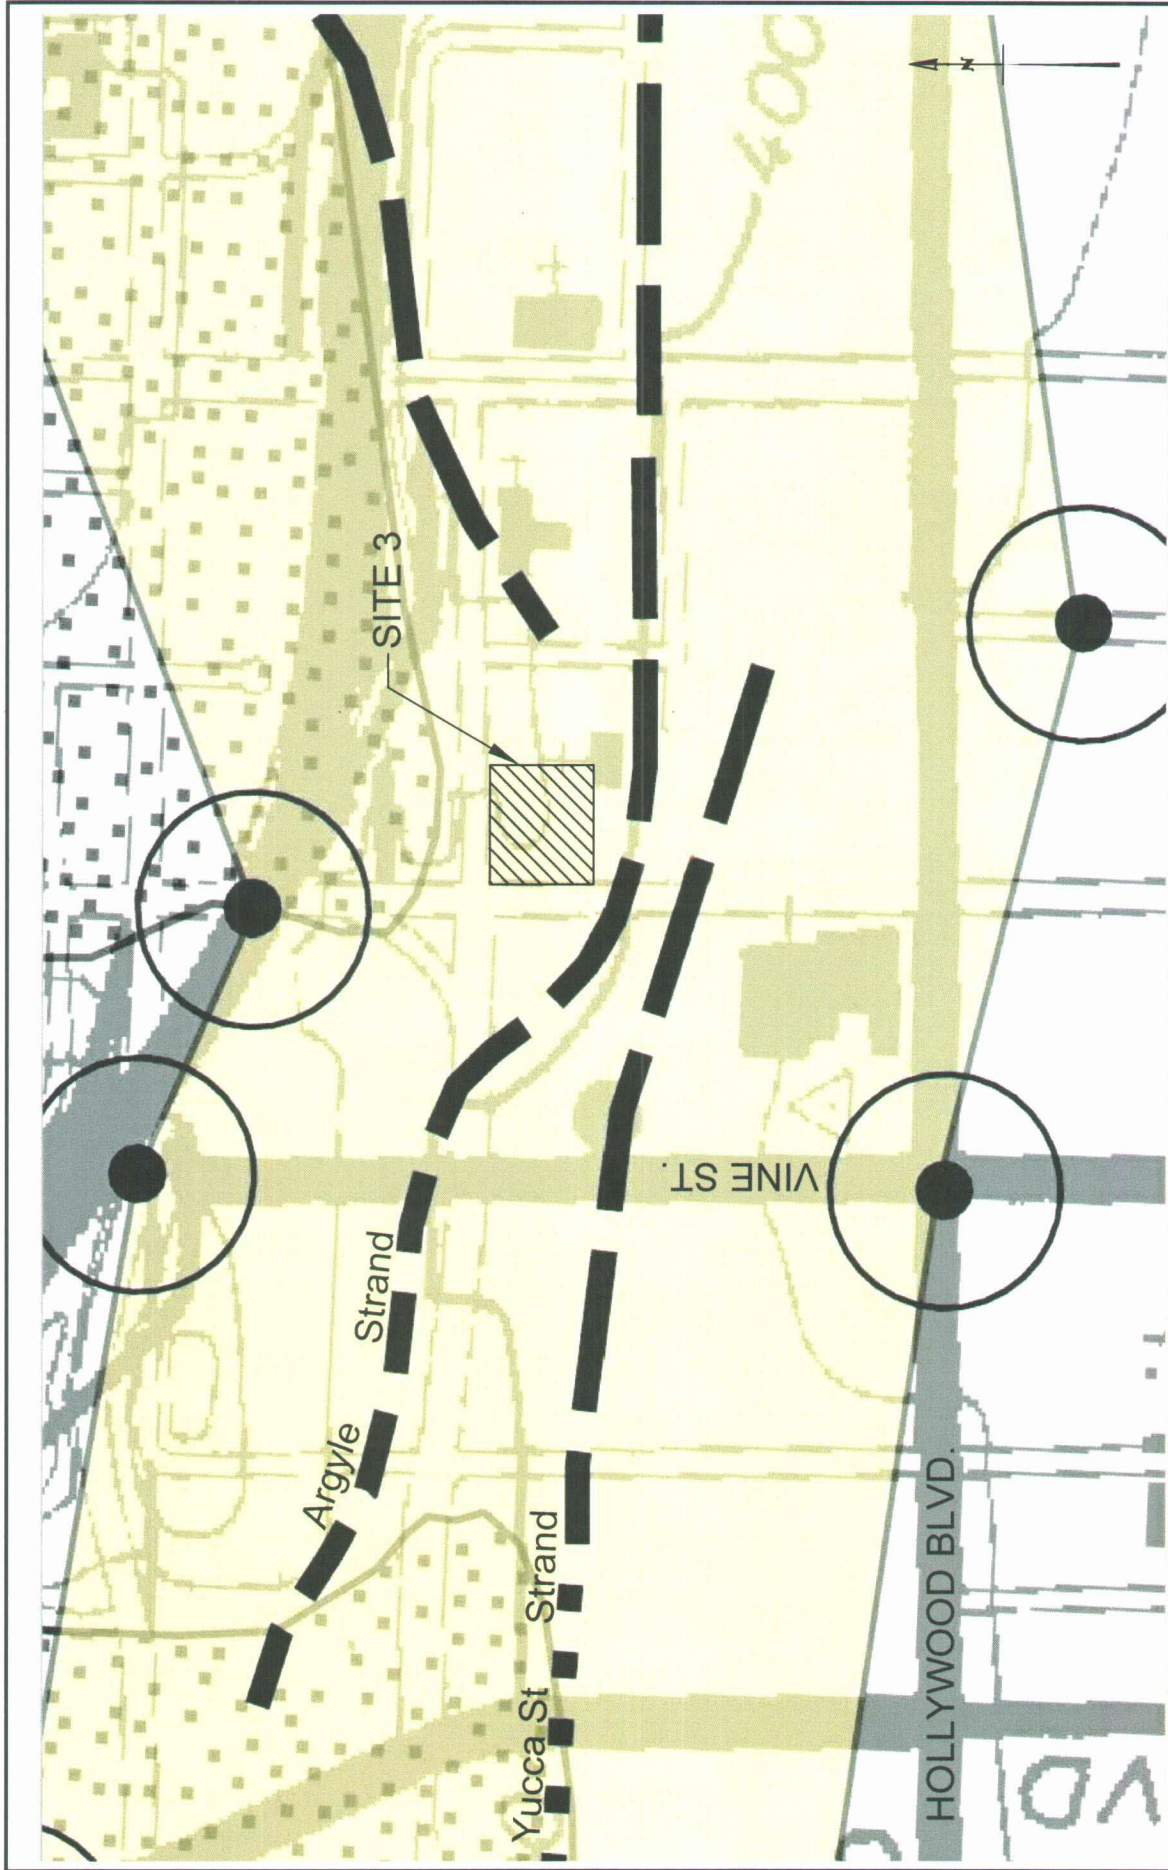

Reference: California Survey FER 253, Jan 8, 2014
LA Weekly 1-8-14

DATE	DRAWN BY			GROUP DELTA	GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501	SITE MAP PROPOSED AP ZONE		PROJECT NUMBER LA1183A
REVISION	5/2/2014	KM				SCALE NO SCALE		
REVISION	9/4/2014	SK				FIGURE NUMBER 1		
REVISION		---	1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA					



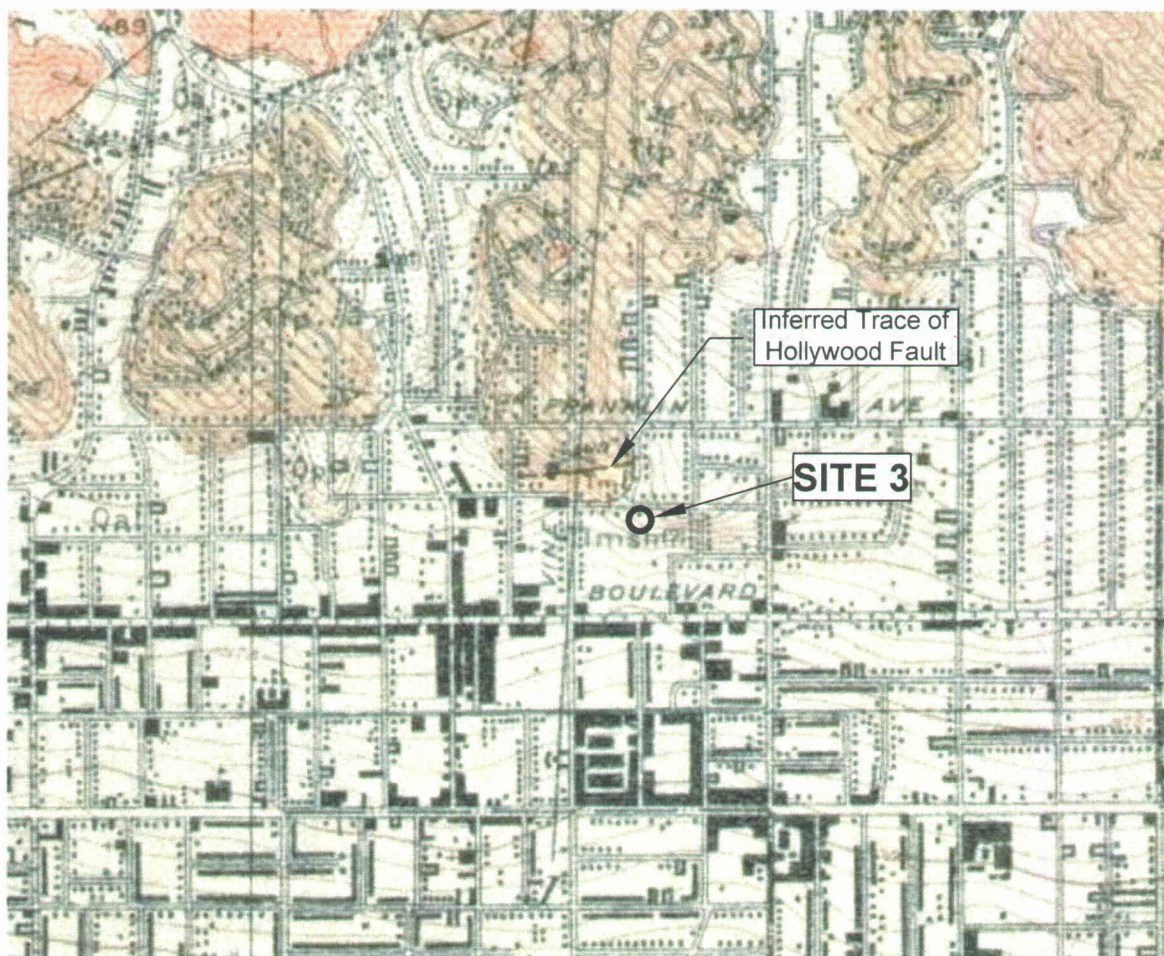



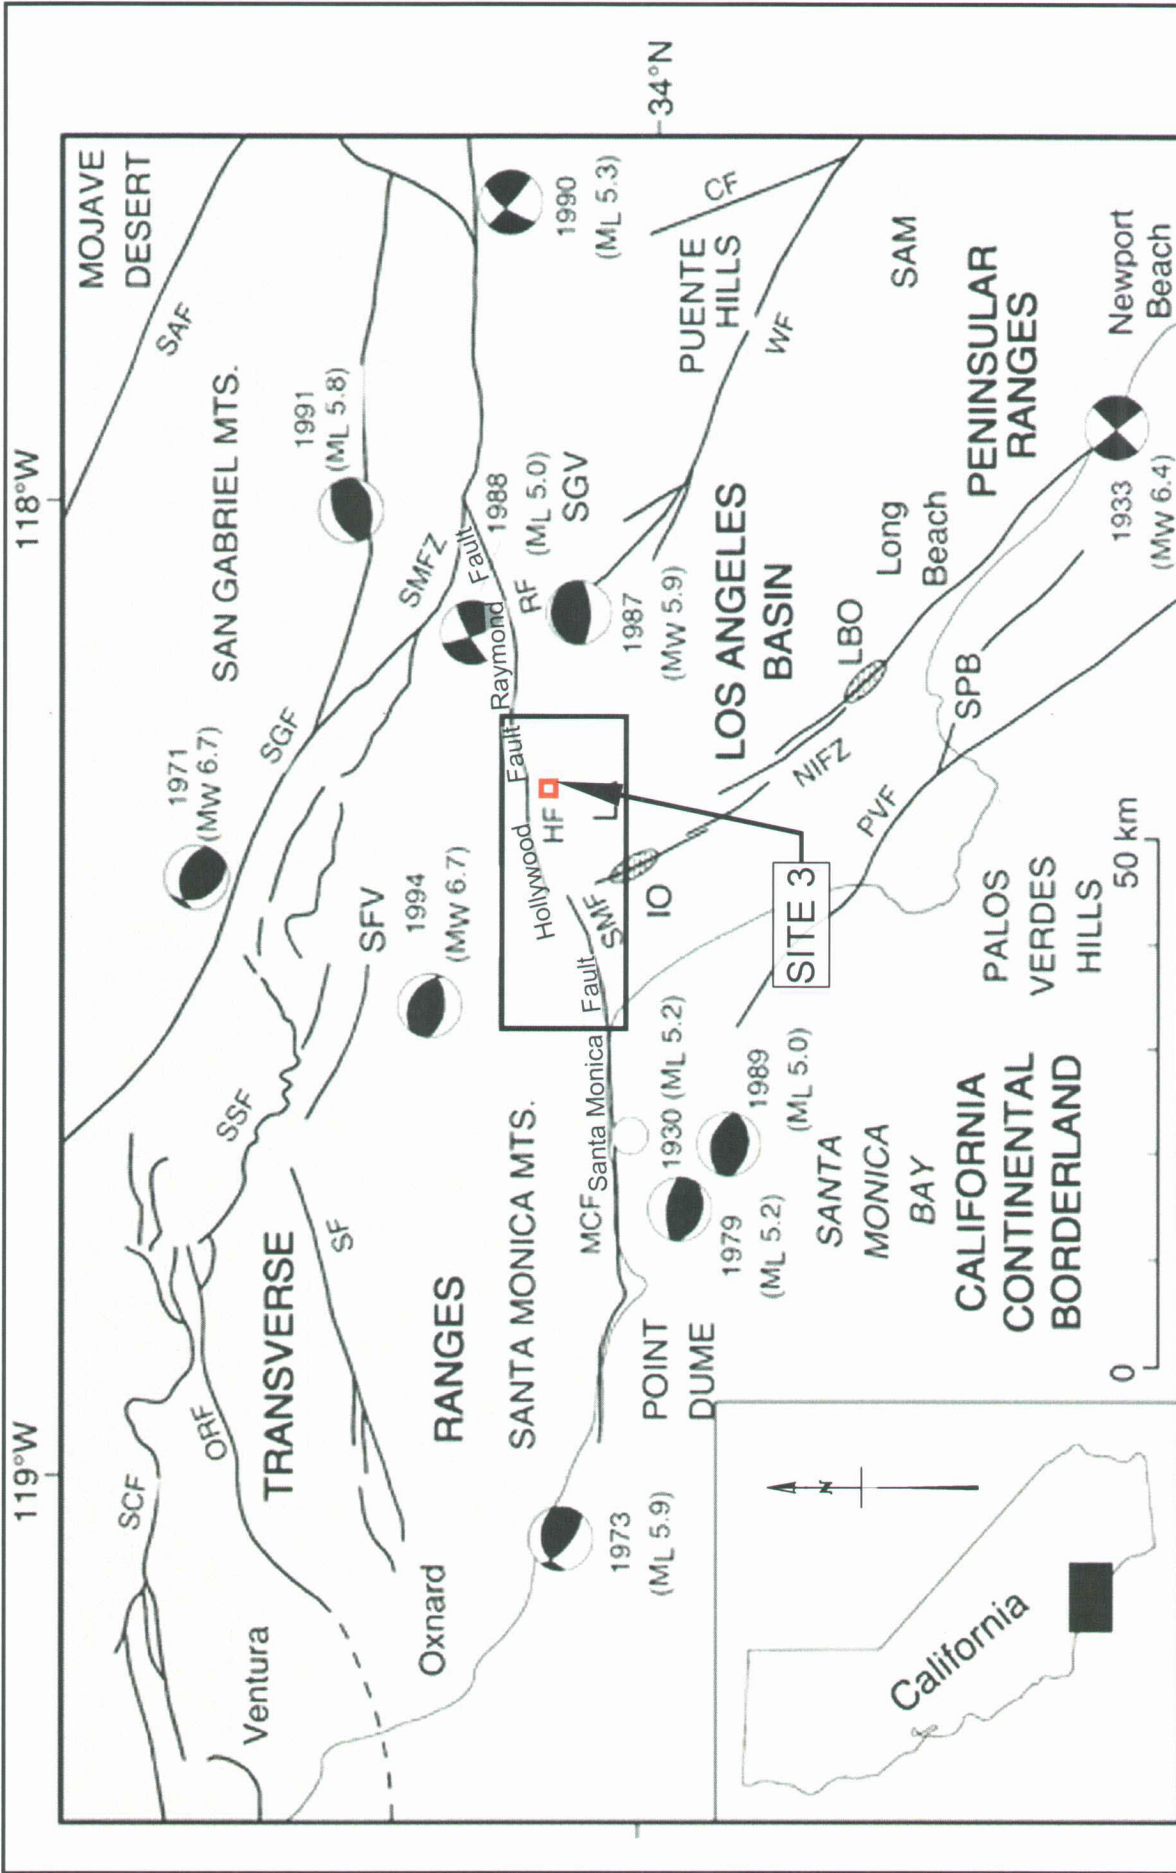
Figure 2: Geologic map of the area. Scale ~1:100,000. (California Geological Survey, Quaternary Geology Map of the Los Angeles 30x60 Quadrangle).

DATE 4/21/2014	DRAWN BY KM		GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501	CGS QUATERNARY GEOLOGIC MAP		PROJECT NUMBER LA1183A
REVISION 9/4/2014	APPROVED BY SK					SCALE NO SCALE
REVISION --				1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA		FIGURE NUMBER 2




Geologic map of SITE 3 (Champion) and vicinity (after Hoots and Kew, 1931) showing inferred trace of a Hollywood Fault separating Modelo (T_m), and Topanga (T_p) Formations and granite rocks and alluvium (Q_a).

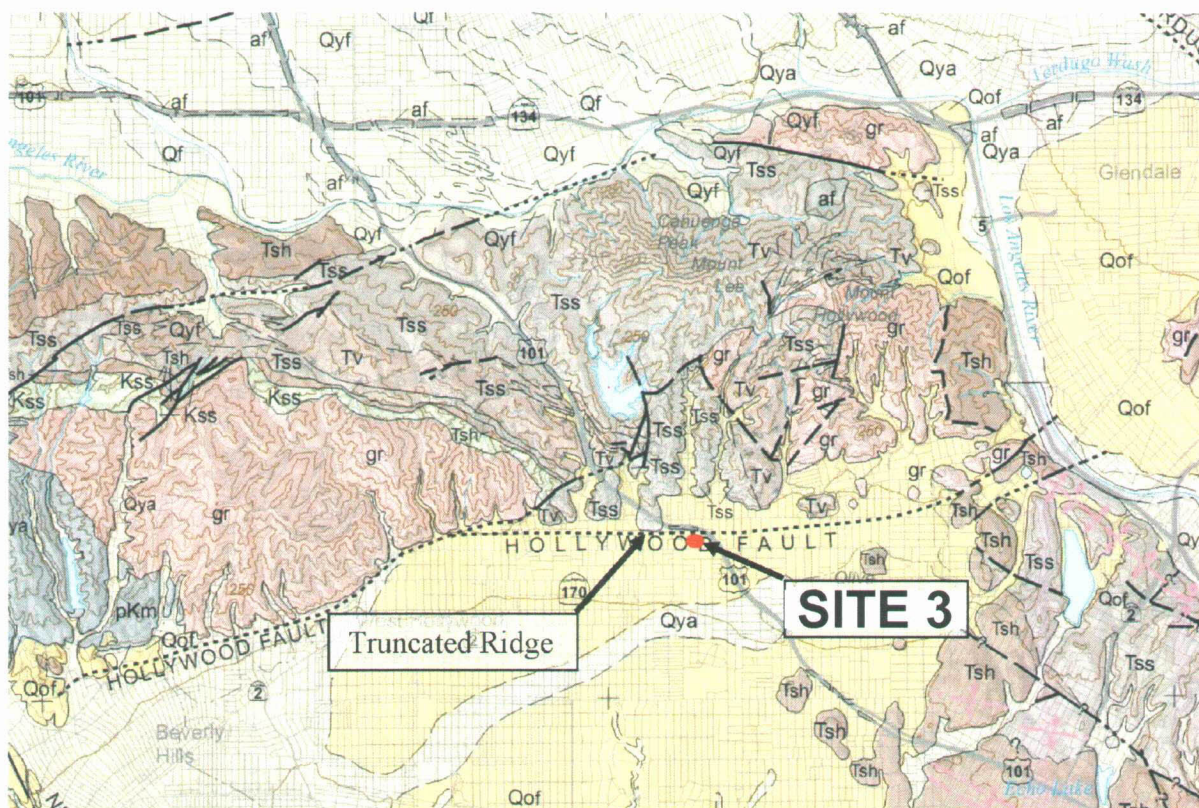DATE 4/11/2014	DRAWN BY KM	 GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501	LOCAL GEOLOGIC MAP, HOOTS AN KEW, (1931)	PROJECT NUMBER LA1183A
REVISION 9/4/2014	APPROVED BY SK			SCALE NO SCALE
REVISION ---			1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA	FIGURE NUMBER 3




Regional fault map of Los Angeles area (after Tsutsumi, Yeats, Hufnagel, 2001)

DATE	5/2/2014	DRAWN BY	GROUP	GROUP DELTA	REGIONAL FAULTS AND HISTORIC EARTHQUAKE MAP	PROJECT NUMBER
REVISION	9/4/2014	APPROVED BY	CONSULTANTS, INC.	370 Arapola Ave. Suite 212 Torrance, CA, 90501	1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA	LA1183A
REVISION	--	--	DELTA			NO SCALE
						FIGURE NUMBER
						4

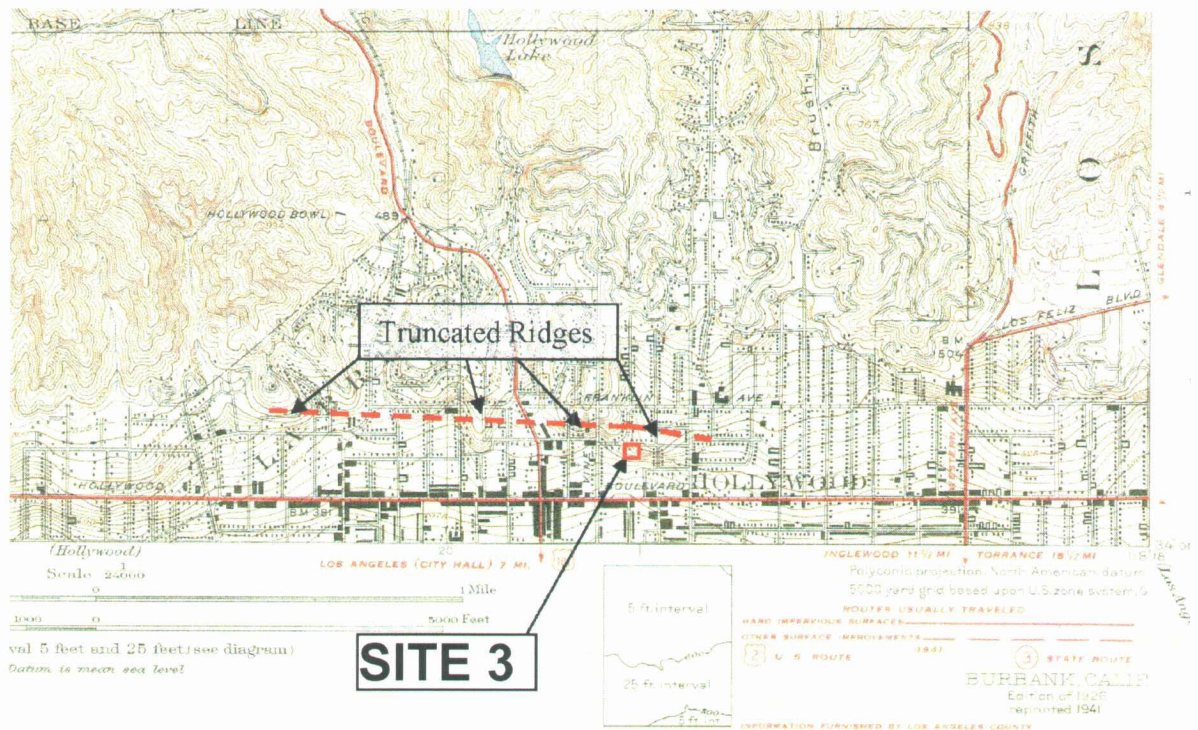

Possible topographic expression of the Hollywood Fault (red dashed line) reflecting truncated ridges.

DATE	4/21/2014	DRAWN BY	KM	 GROUP DELTA	GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501	BURBANK 6' QUADRANGLE, SHOWING GEOMORPHIC FEATURES, 1926, REV, 1941		PROJECT NUMBER	LA1183A
REVISION	9/7/2014	APPROVED BY	SK			SCALE	NO SCALE		
REVISION	--					1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA		FIGURE NUMBER	5

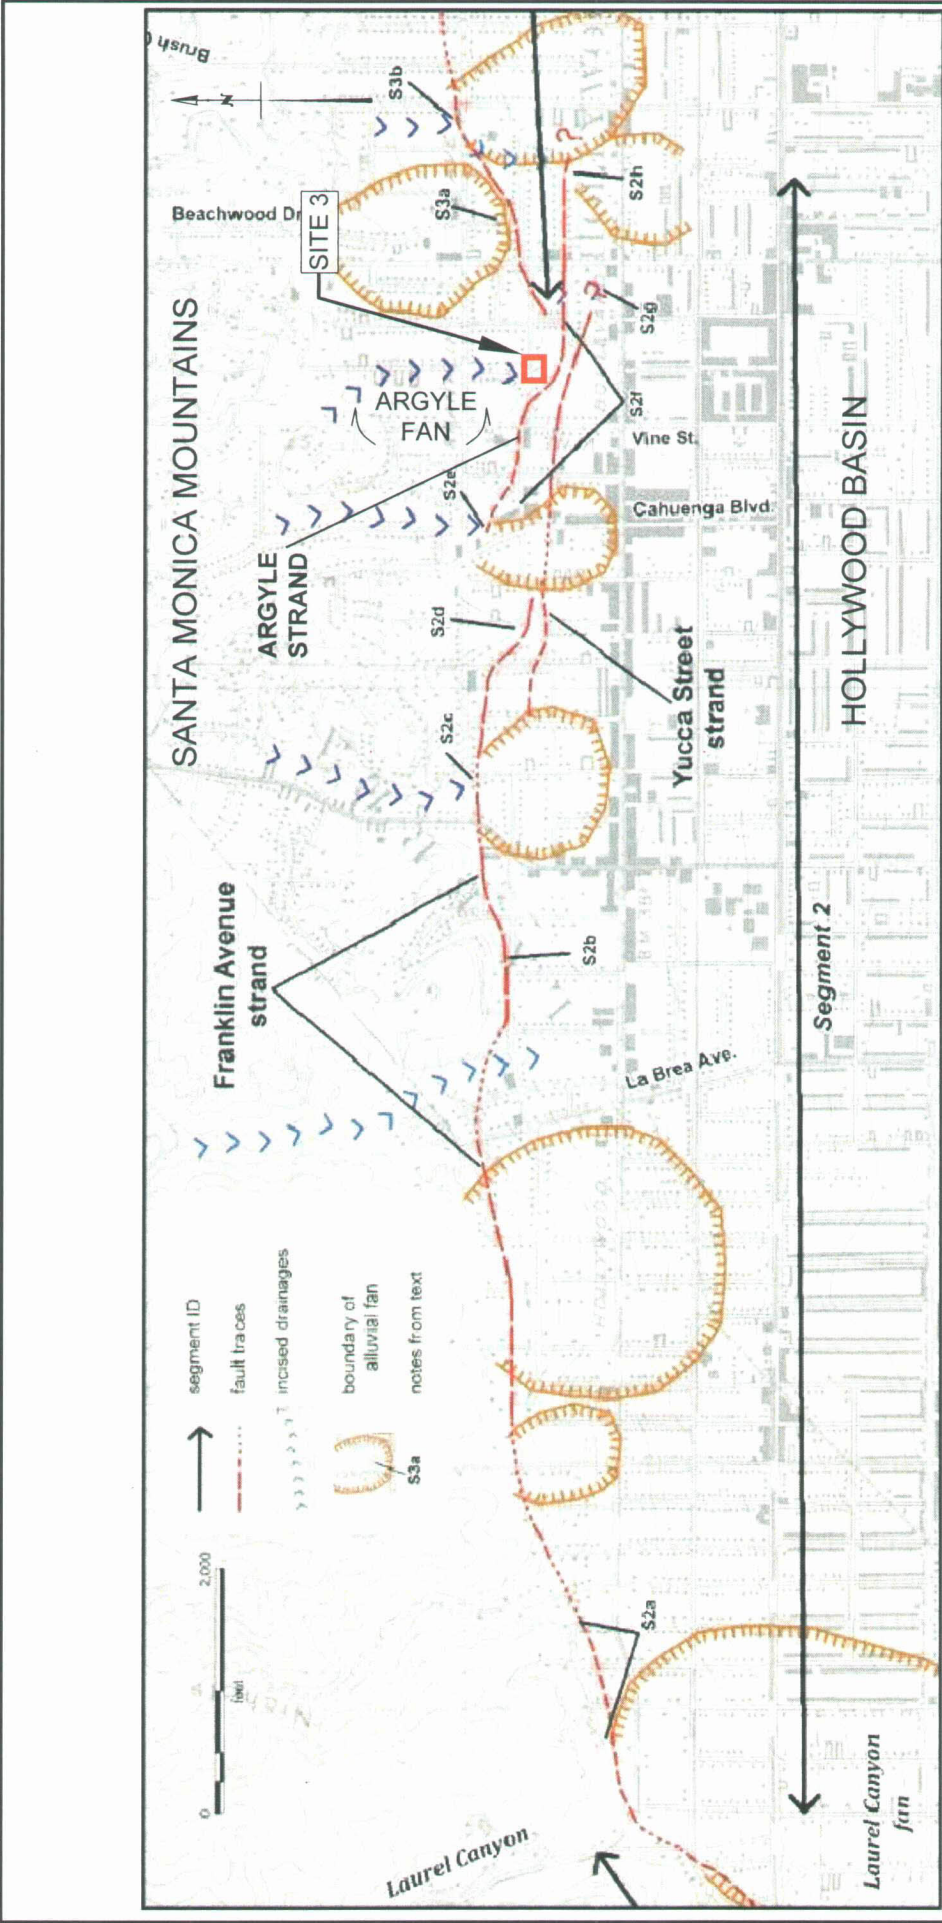


Figure 6: General distribution of Holocene fans and inferred traces of the Hollywood fault (after CGS, FER 253 (2014)); base map (Hollywood & Burbank 6' Quad, 1926)

DATE	DRAWN BY	KM	GROUP	HOLLYWOOD FAULT GEOMORPHIC		PROJECT NUMBER
				FEATURES, FER 253		LA1183A
						SCALE
4/9/2014						1" = 1000'
REVISION	APPROVED BY	SK	GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501		1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA	
					FIGURE NUMBER	
						6

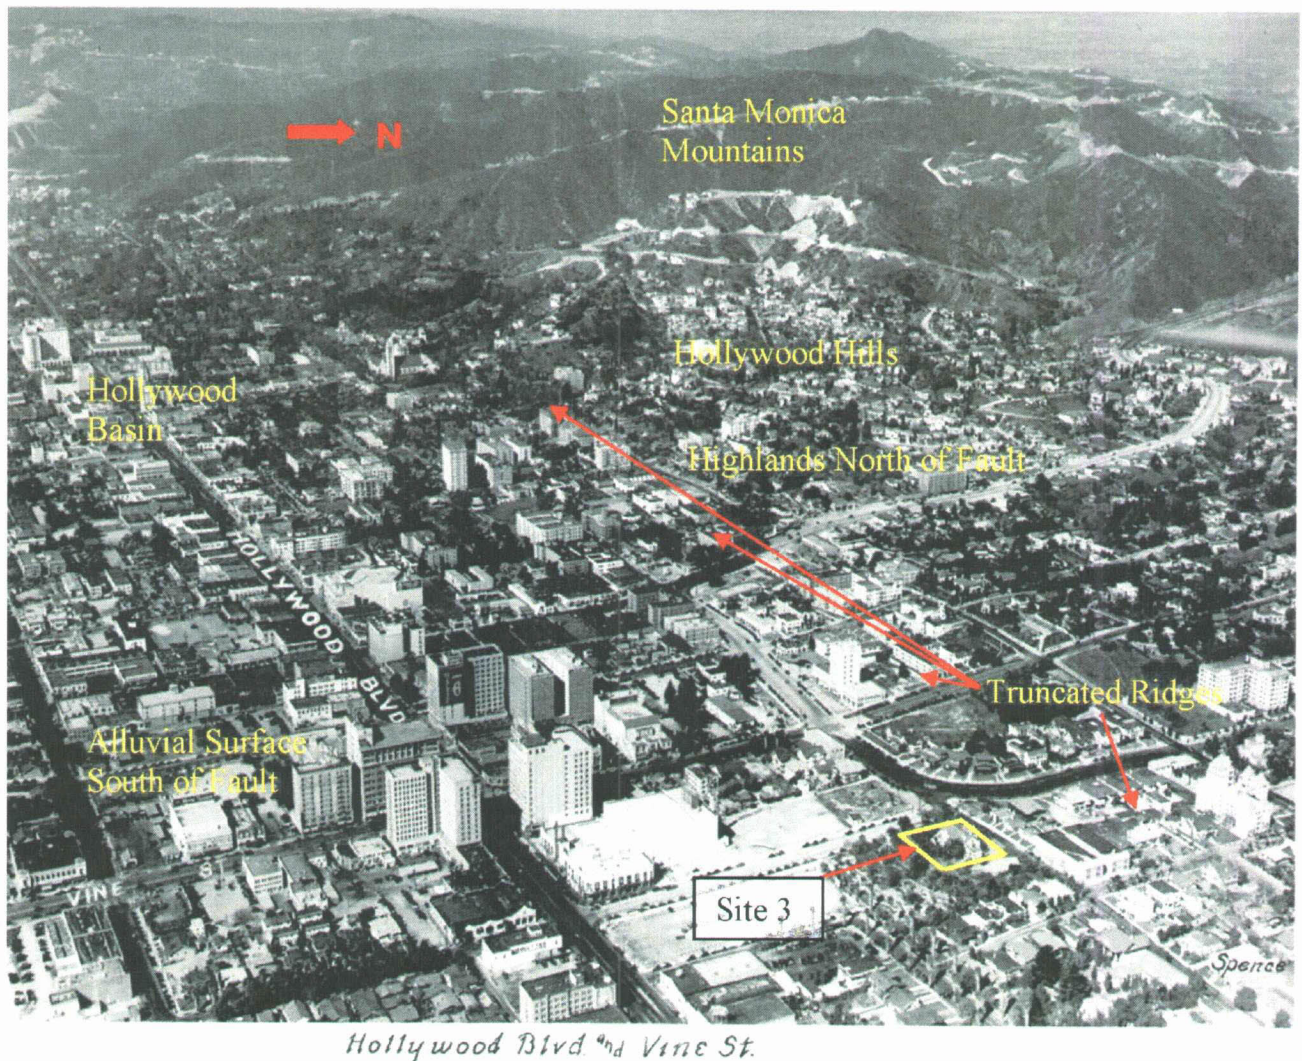


Figure 7: Approximate lineaments of the truncated ridges (red dashed line). (Spence Collections, 3-2-31, The Benjamin and Gladys Thomas Air Photo Archives, UCLA).

DATE: 4/21/2014	DRAWN BY: KM	 GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501	SPENCE 1930 OBLIQUE AERIAL PHOTO SHOWING GEOMORPHIC FEATURES	PROJECT NUMBER: LA1183A
REVISION: 9/4/2014	APPROVED BY: SK			SCALE: NO SCALE
REVISION: —			1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA	FIGURE NUMBER: 7

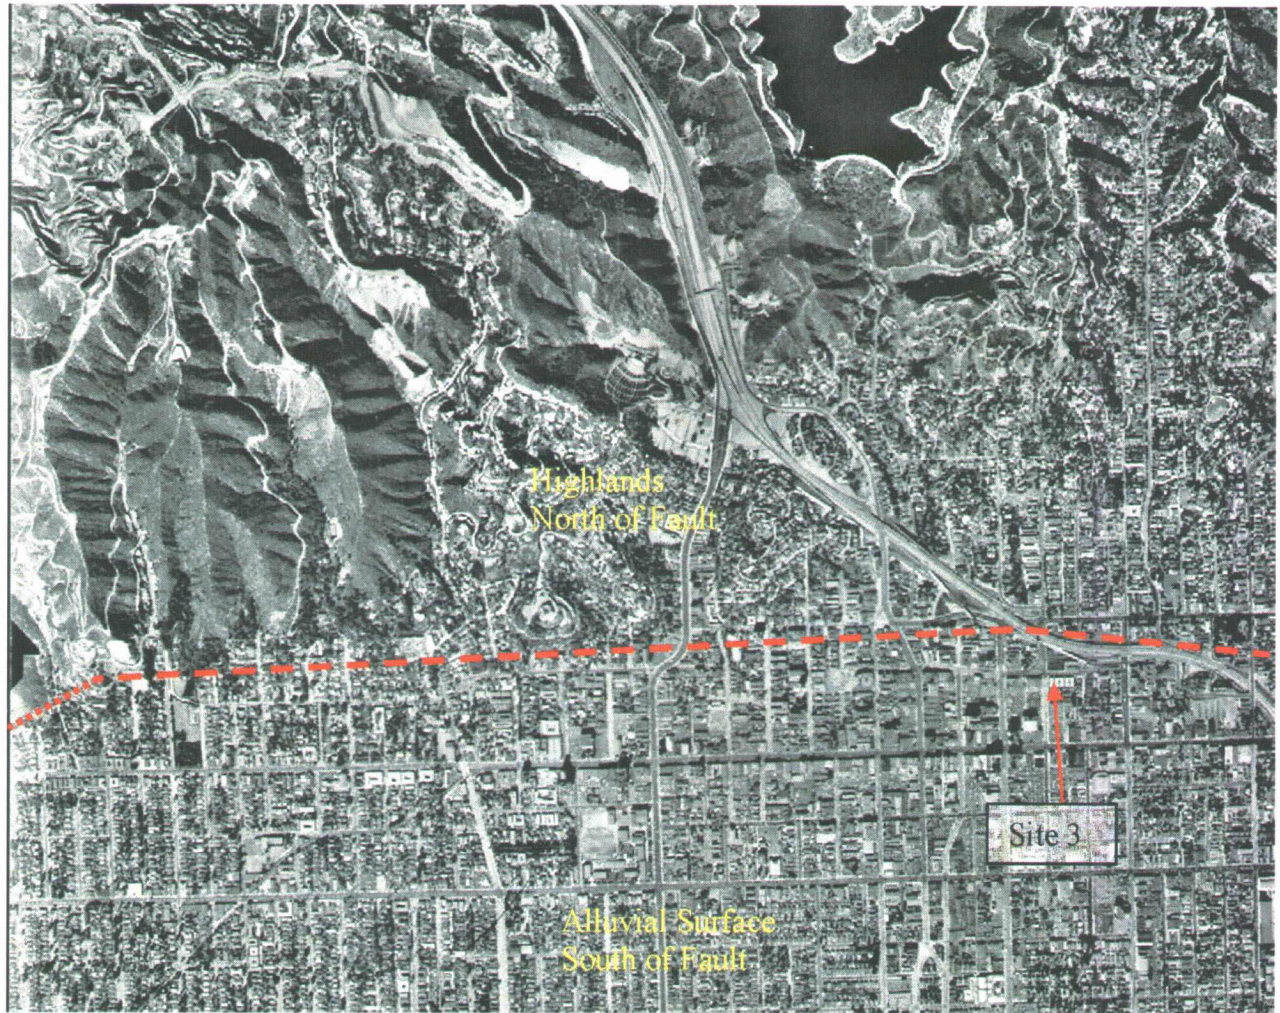


Figure 8: Approximate linear expression of the truncated ridges (red dashed line) based on aerial photo analysis. See Figure 6 for other geomorphic details. Scale unknown. (Continental Aerial Photo, 10-27-54).



DATE 4/21/2014	DRAWN BY KM	 GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501	CONTINENTAL 1954 AERIAL PHOTO SHOWING GEOMORPHIC FEATURES 1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA	PROJECT NUMBER LA1183A
REVISION 9/4/2014	APPROVED BY SK			SCALE NO SCALE
REVISION ---				FIGURE NUMBER 8

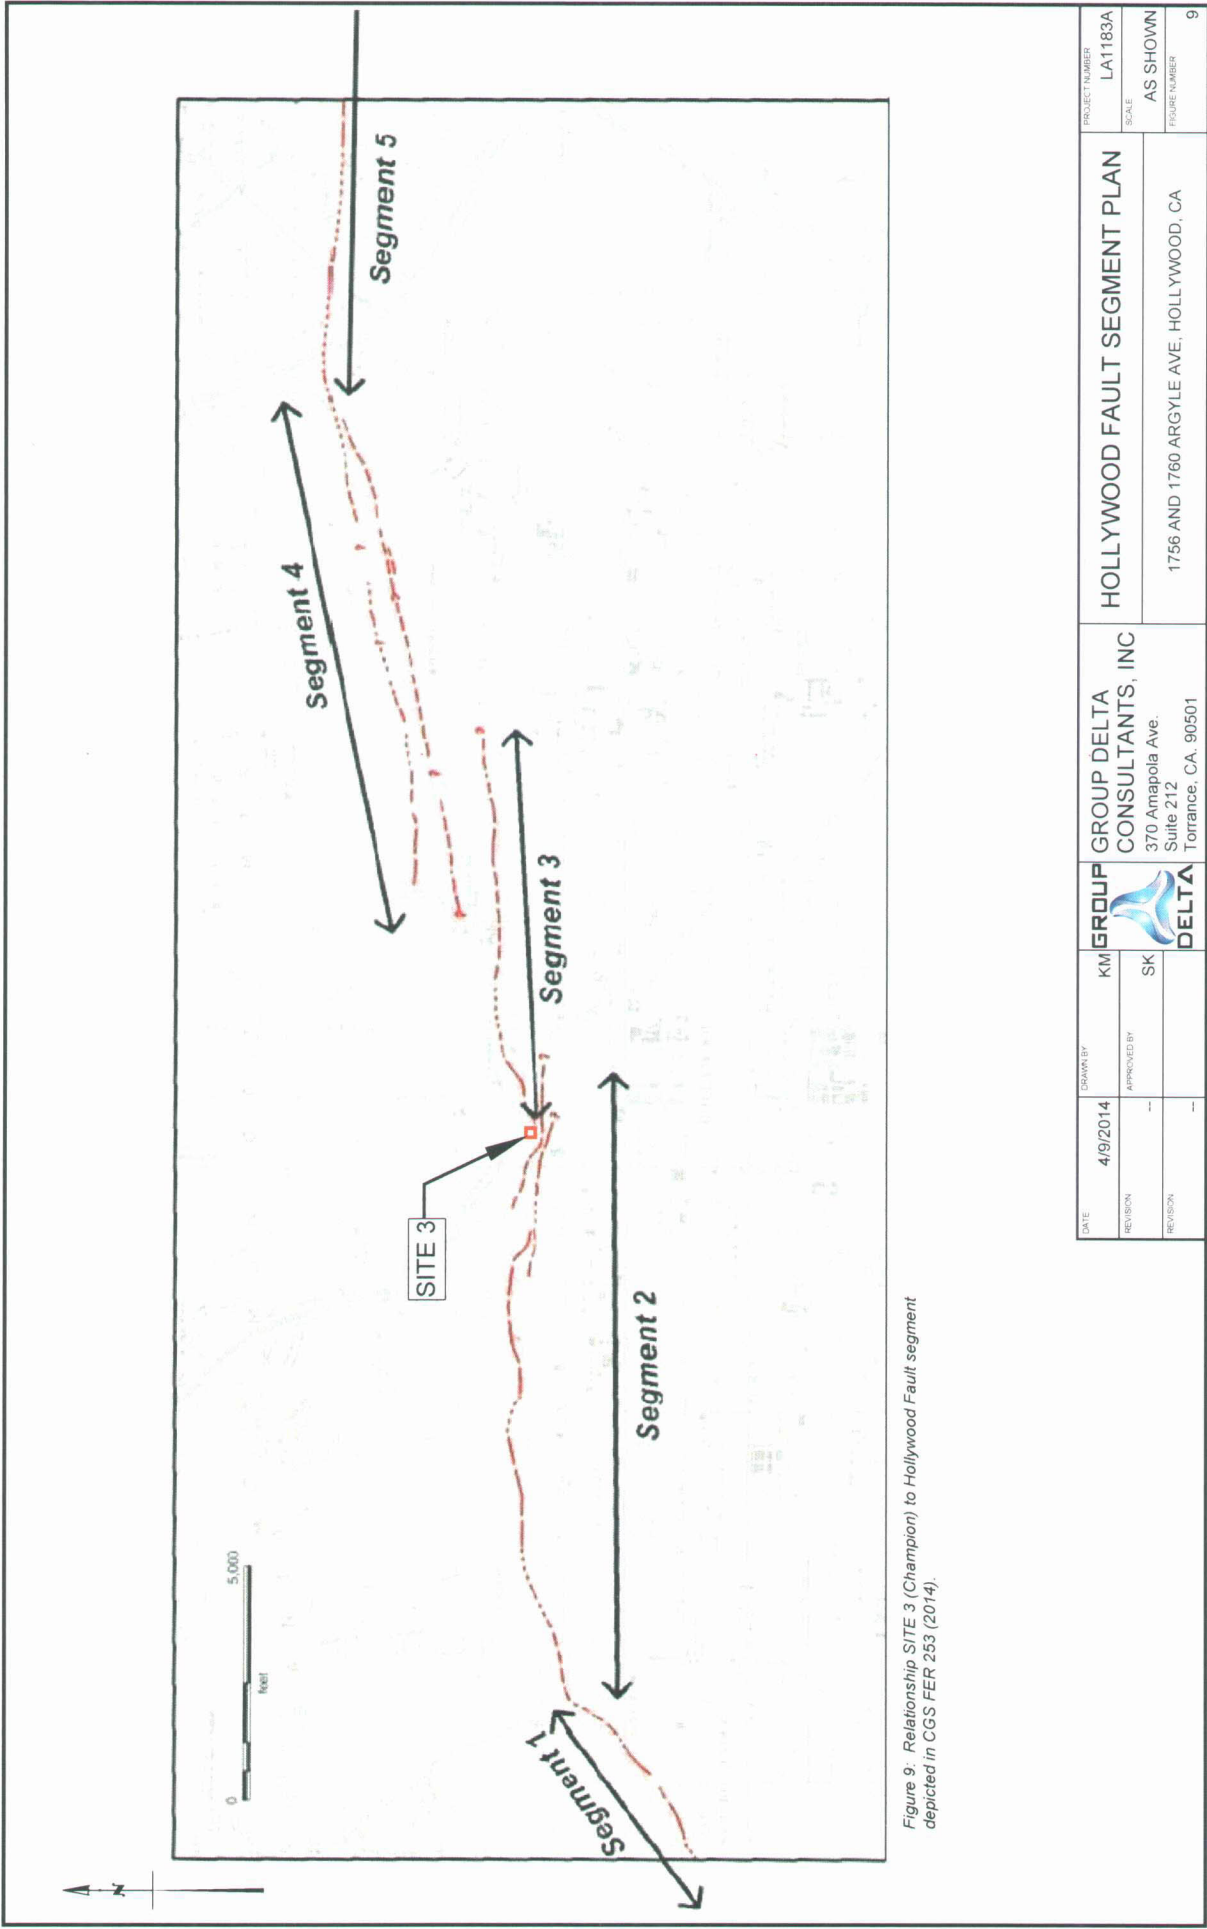


Figure 9. Relationship SITE 3 (Champion) to Hollywood Fault segment depicted in CGS FER 253 (2014).

DATE	4/9/2014	DRAWN BY	KM	PROJECT NUMBER	LA1183A
REVISION		APPROVED BY	SK	SCALE	AS SHOWN
REVISION				FIGURE NUMBER	9
GROUP DELTA CONSULTANTS, INC. 370 Armapola Ave. Suite 212 Torrance, CA. 90501				HOLLYWOOD FAULT SEGMENT PLAN	
				1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA	

LOCAL STRATIGRAPHIC SECTION


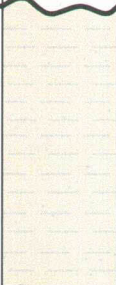
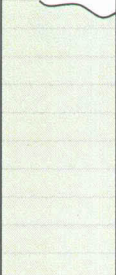
	Symbol	Thickness	Sediment Type	Name
Holocene	Q _{af}	0 - 10'		Artificial Fill
	Q _s	0 - 30'		Upper Sand Argyle Channel Deposits
Pleistocene	Q _m	0 - 13'		Older Mud Flow
	Q _{df}	0 - 25'		Older Debris Flow
	Q _{oal}	0 - >60'		Older Alluvium
Miocene	T _m	100+		Modelo Formation "Bedrock"

Figure 10

STEREOGRAPHIC PROJECTION


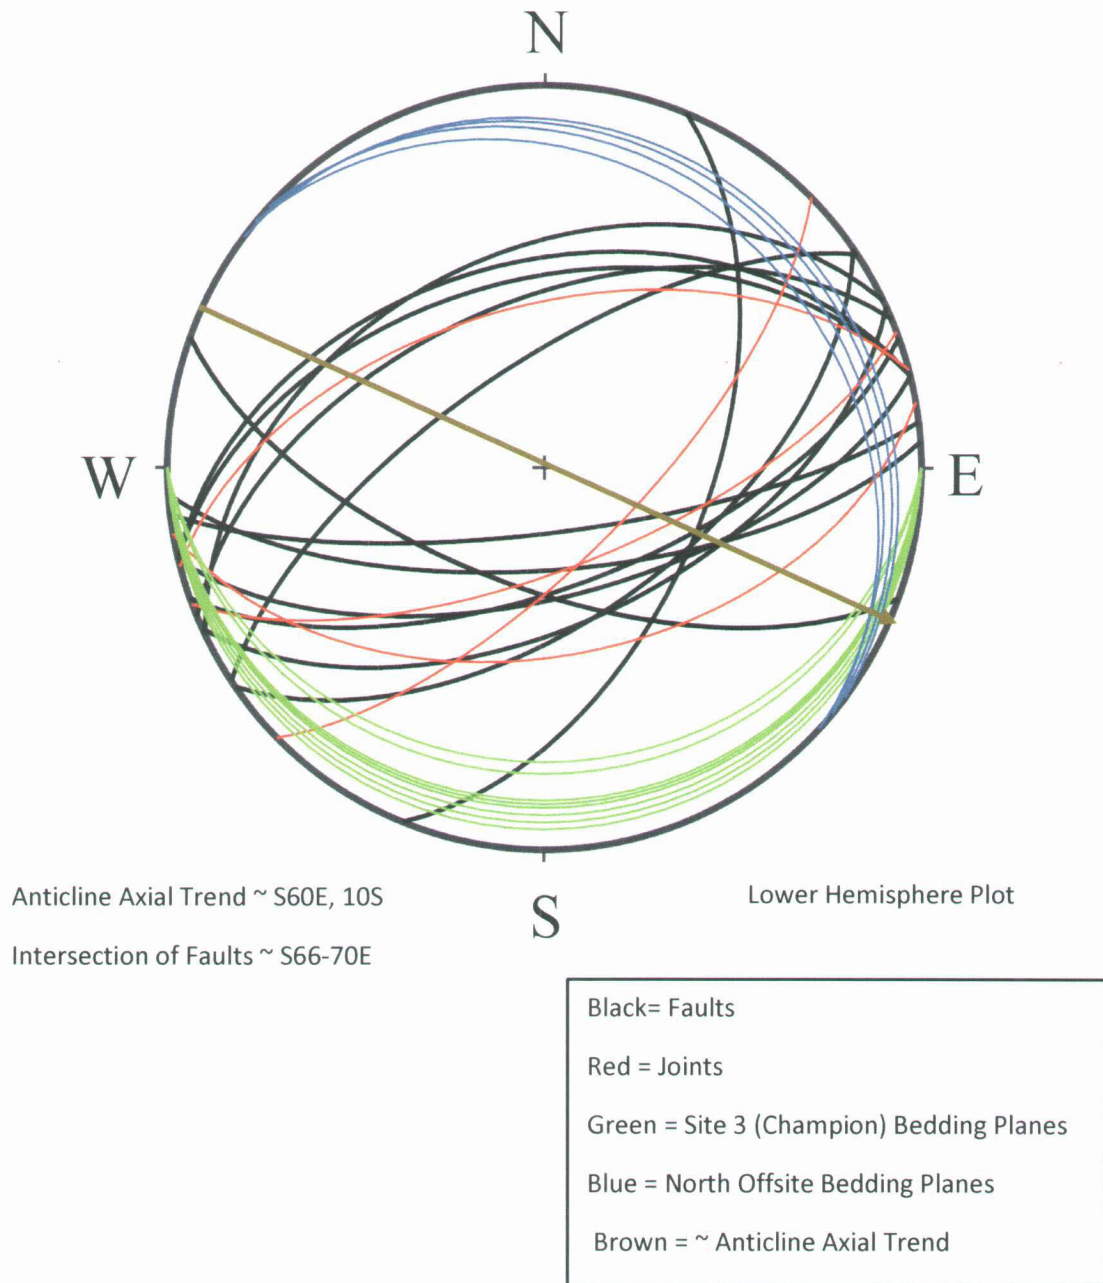



Figure 11. Stereo plot of geologic-structural elements of faults, joints and bedding planes at Proposed Yucca-Argyle Apartments.

September 4, 2014

LA 1183A

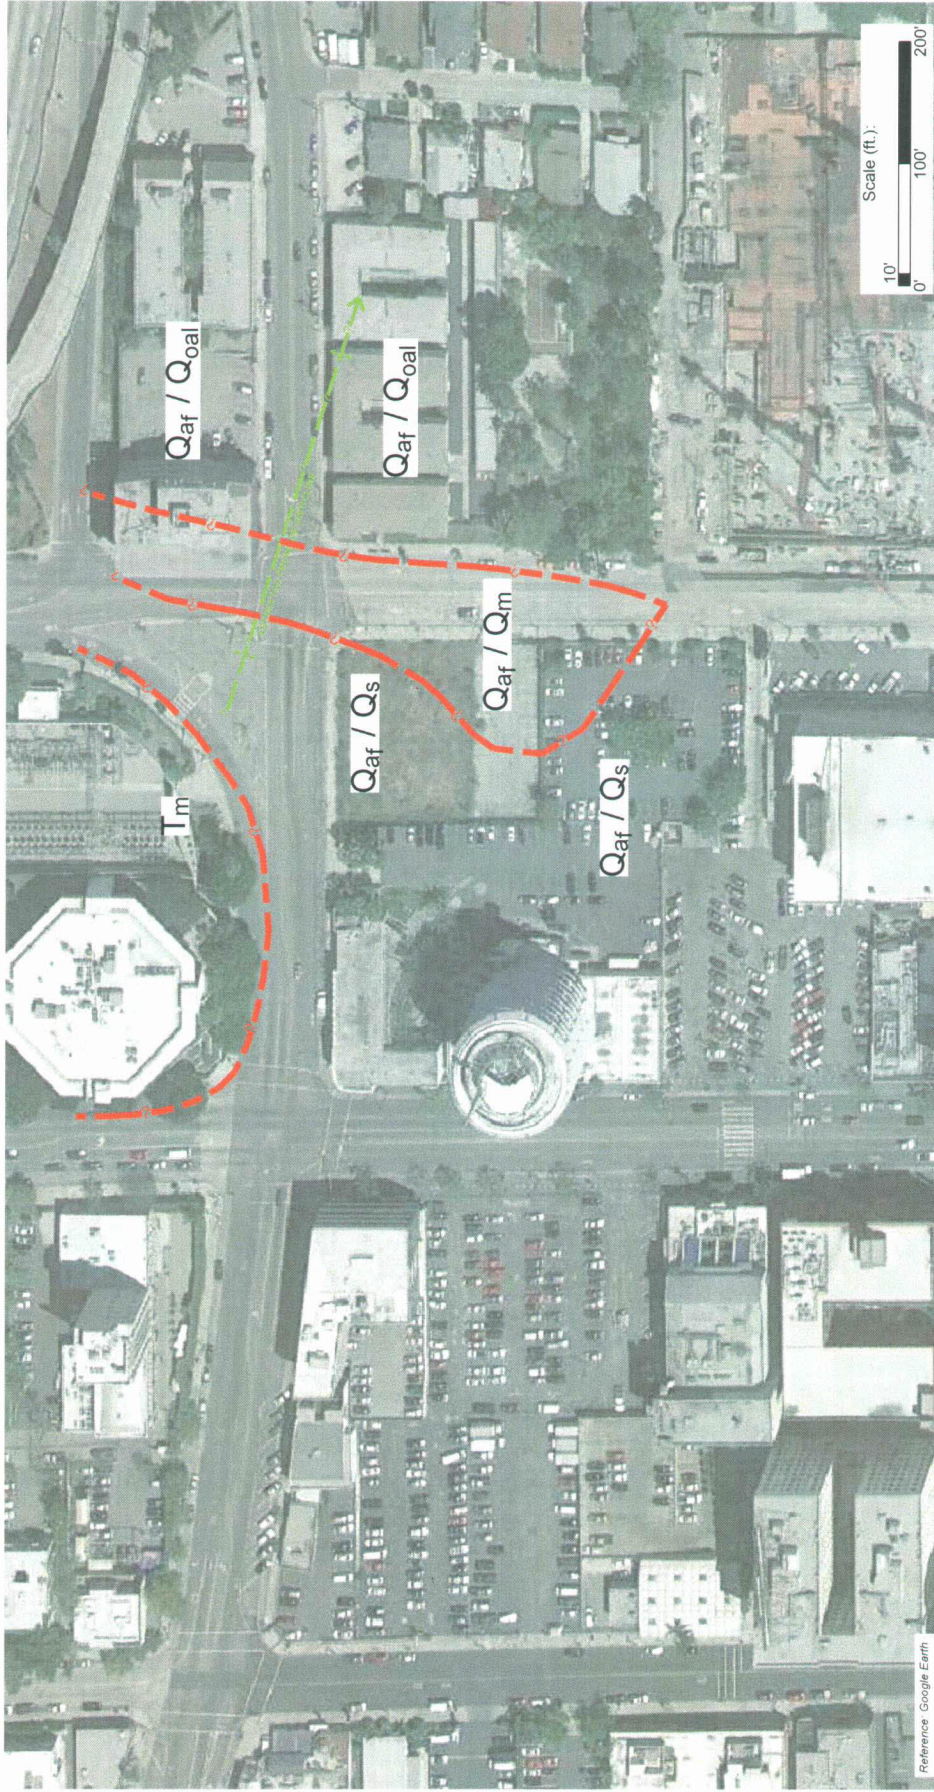

DATE	8/5/2014	DRAWN BY	KM	GROUP		GROUP DELTA CONSULTANTS, INC 370 Amapola Ave. Suite 212 Torrance, CA. 90501	GEOLOGIC MAP		PROJECT NUMBER	LA1183A
	REVISION						1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA		SCALE	AS SHOWN
	REVISION								FIGURE NUMBER	12

PLATES

Plate 1 Boring, CPT and Trench Locations

SITE 2 (Yucca)

Plate 2 Cross Section A-A' (CPT/Soil Core)

Plate 3 Cross-Section B-B' (West Trench)

Plate 4 Cross Section B-B'-B'' (West Trench and Logs)

Plate 5 Cross-Section C-C' (East Trench – East Side)

Plate 6 Cross-Section D-D' (East Trench – West Side)


Plate 7 Cross-Section E-E' (East-West Schematic)

SITE 3 (Champion)

Plate 8 Cross-Section F-F' (Champion Trench)

Plate 9 Cross Section G-G' (Champion CPT/Soil Core)

Plate 10 Cross-Section H-H' (Champion Schematic)

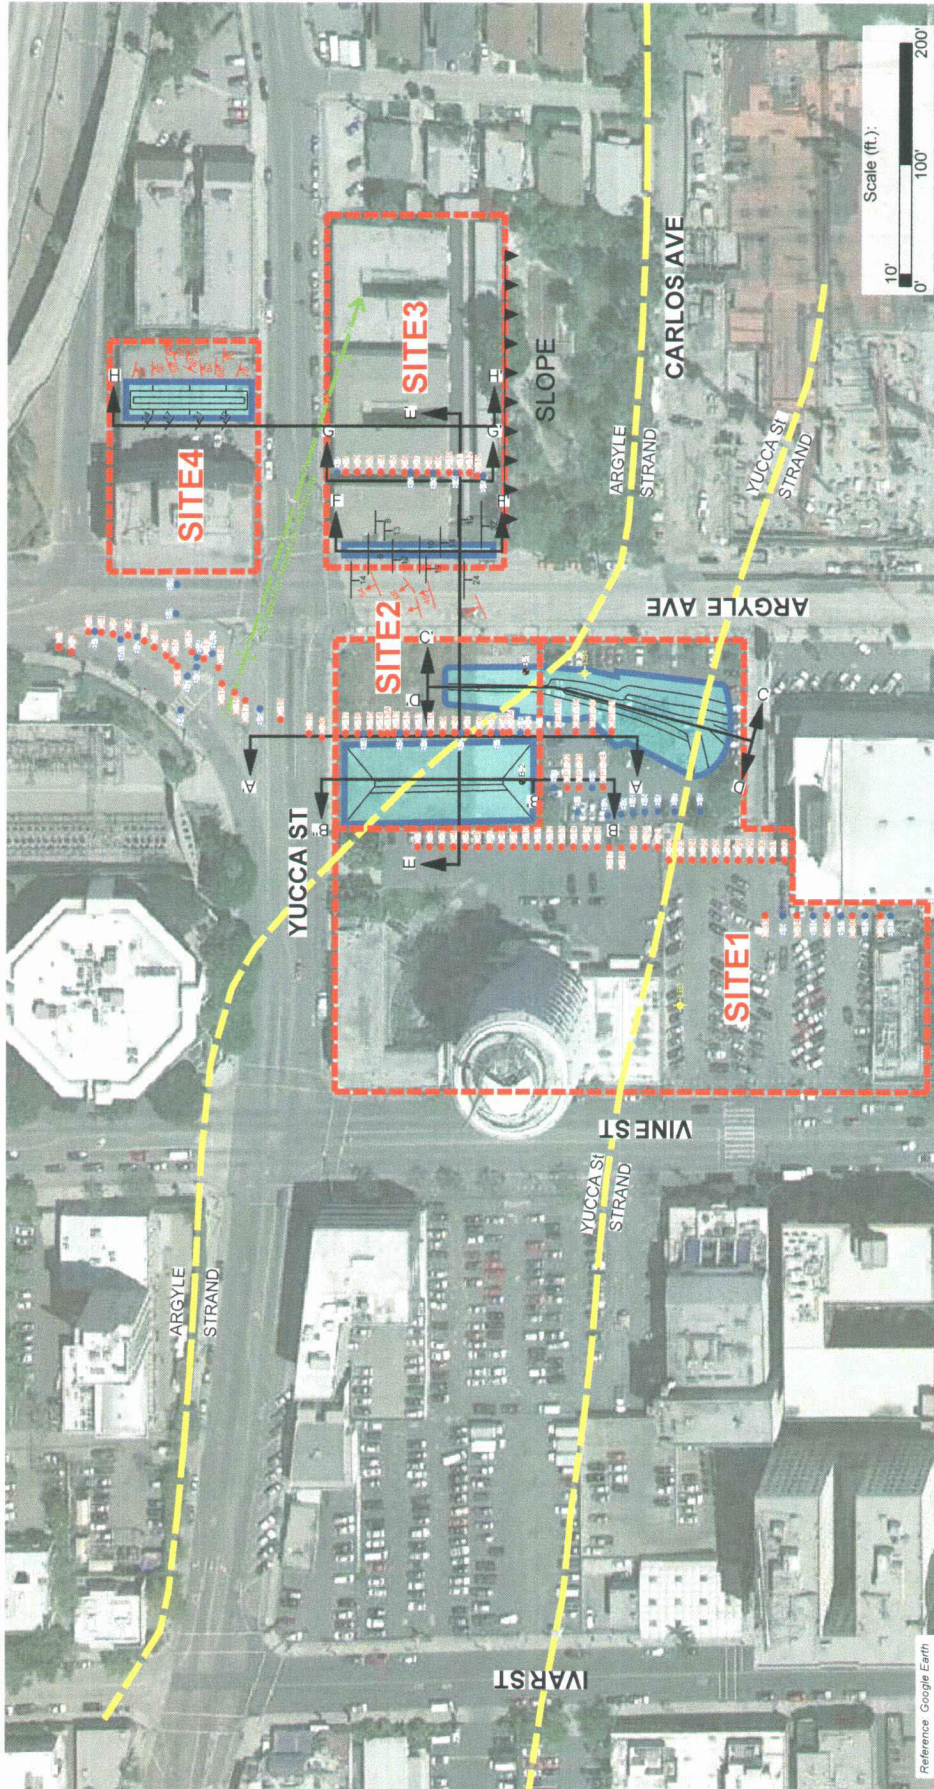



Reference: Google Earth

LEGEND


- Boring Location and Test Number, GDC 2014
- Boring Location and Test Number, GDC 2014
- CPT (Cone Penetration Test) Location and Test Number, GDC 2014
- Boring Location and Test Number, GDC 2006
- Trench Location Outlines
- Strike and Dip of Faults
- Strike and Dip of Bedding
- Approximate location of anticline. Barb indicates direction of plunge.
- ▲ Top of Slope

DATE	8/5/2014	DESIGNED BY	KM	GROUP	GROUP DELTA CONSULTANTS, INC	BORING CPT AND TRENCH LOCATIONS PLAN MODIFIED FROM GDC PN: LA1161A (2014)	PROJECT NUMBER LA1183A
REVISION	9/4/2014	APPROVED BY	MR		370 Arapola Ave. Suite 212 Torrance, CA. 90501		SCALE AS SHOWN
REVISION	9/8/2014					1756 AND 1760 ARGYLE AVE., HOLLYWOOD, CA SITE 3	PLATE NUMBER 1

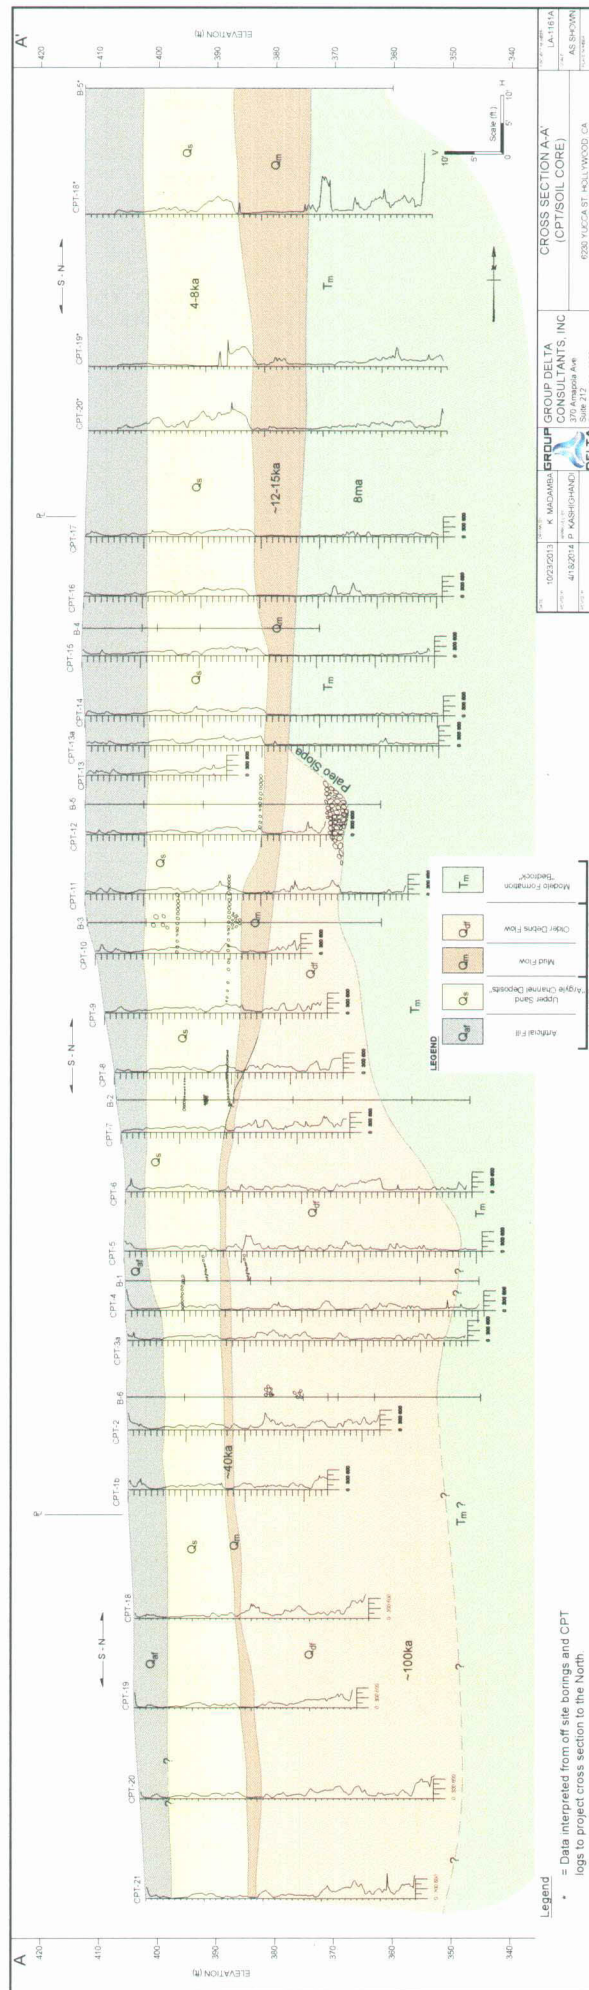


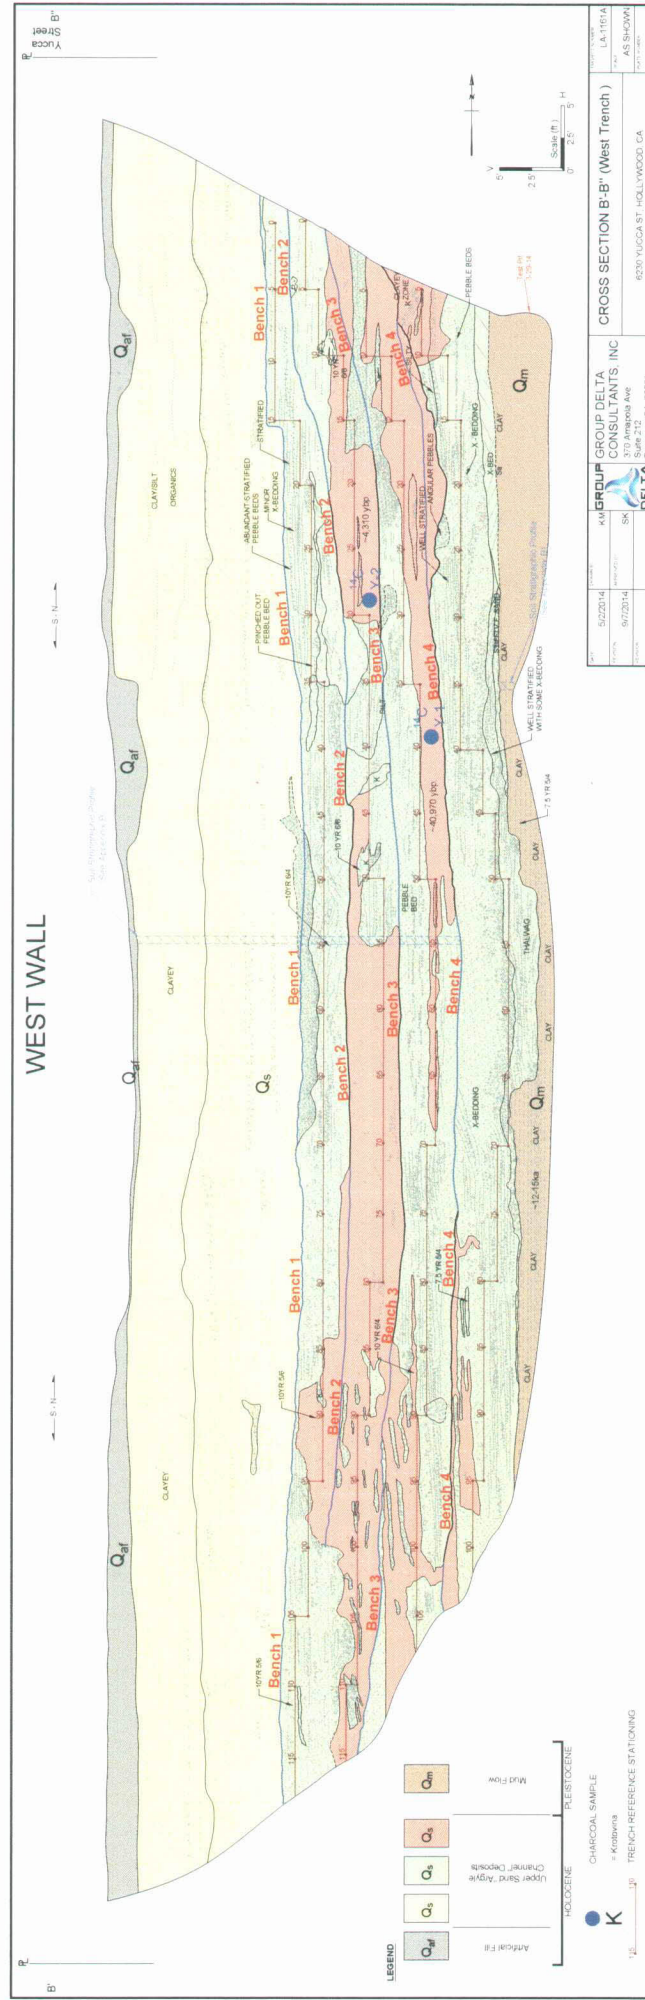

WEST WALL

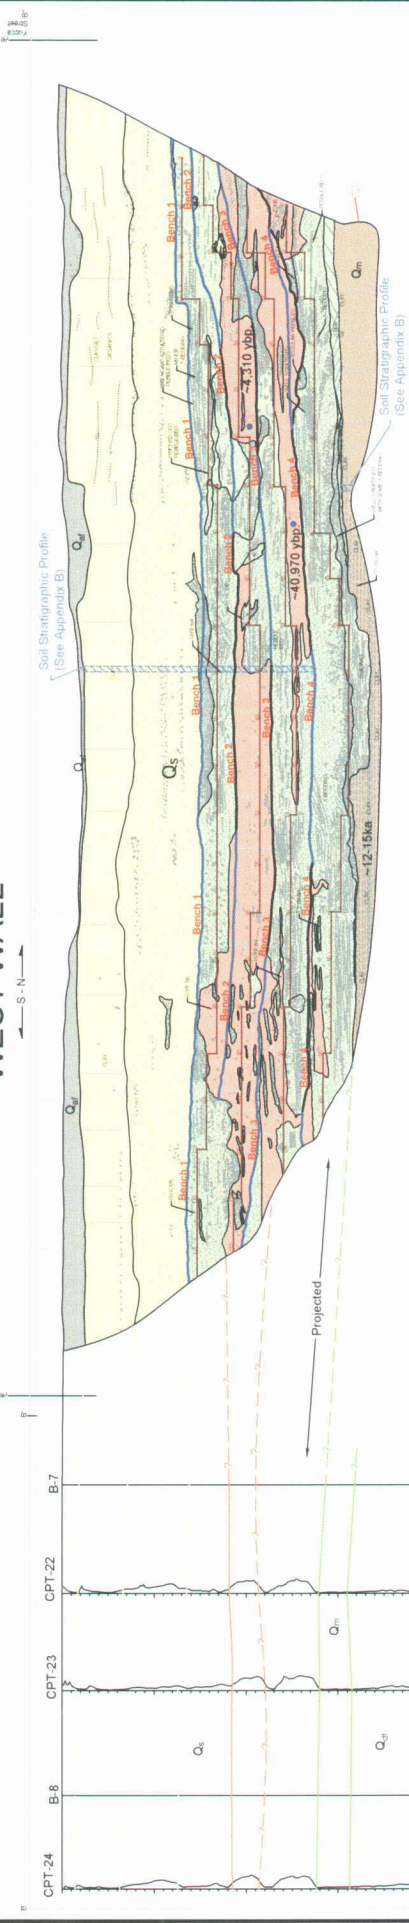

LEGEND

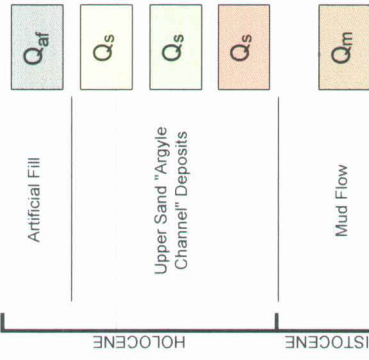

C¹⁴ SAMPLE

K = Krotovina

TRENCH REFERENCE STATIONING

DATE	5/2/2014	DRAWN BY	KM	GROUP	GROUP DELTA CONSULTANTS, INC	CROSS SECTION B-B'-B" (West Trench and Logs)	PROJECT NUMBER	LA-1161A
REVISION	8/30 /2014	APPROVED BY	SK		370 Amapola Ave Suite 212 Torrance, CA. 90501		SCALE	AS SHOWN
REVISION	--			DELTA		6230 YUCCA ST, HOLLYWOOD, CA	PLATE NUMBER	4

East Trench - East Wall

Map showing geological features, elevations, and project boundaries. The map includes a legend for soil types (Qp, Qs, Qm, Qr) and a scale bar. The title "East Trench - East Wall" is prominently displayed at the top.

LEGEND

- Qp: Artificial Fill
- Qs: Natural Sand
- Qm: Natural Channel Deposits
- Qr: Mud Flow
- Qr: Other Recent Flow

Scale: 0 to 100 feet

North Arrow: N

Project Information:

- Project: BPA/27th
- Client: BPA/27th
- Contract: 8370 0714
- Scale: 1" = 100'
- Sheet: 1 of 1

CROSS SECTION C-C' (EAST TRENCH - EAST WALL)


ESR YUCCA ET HOLLYWOOD, CA


GROUP DELTA CONSULTANTS, INC.


10000 DELTA BLVD, SUITE 100, BOSTON, MA 02116


TEL: 617 552 1100 FAX: 617 552 1101

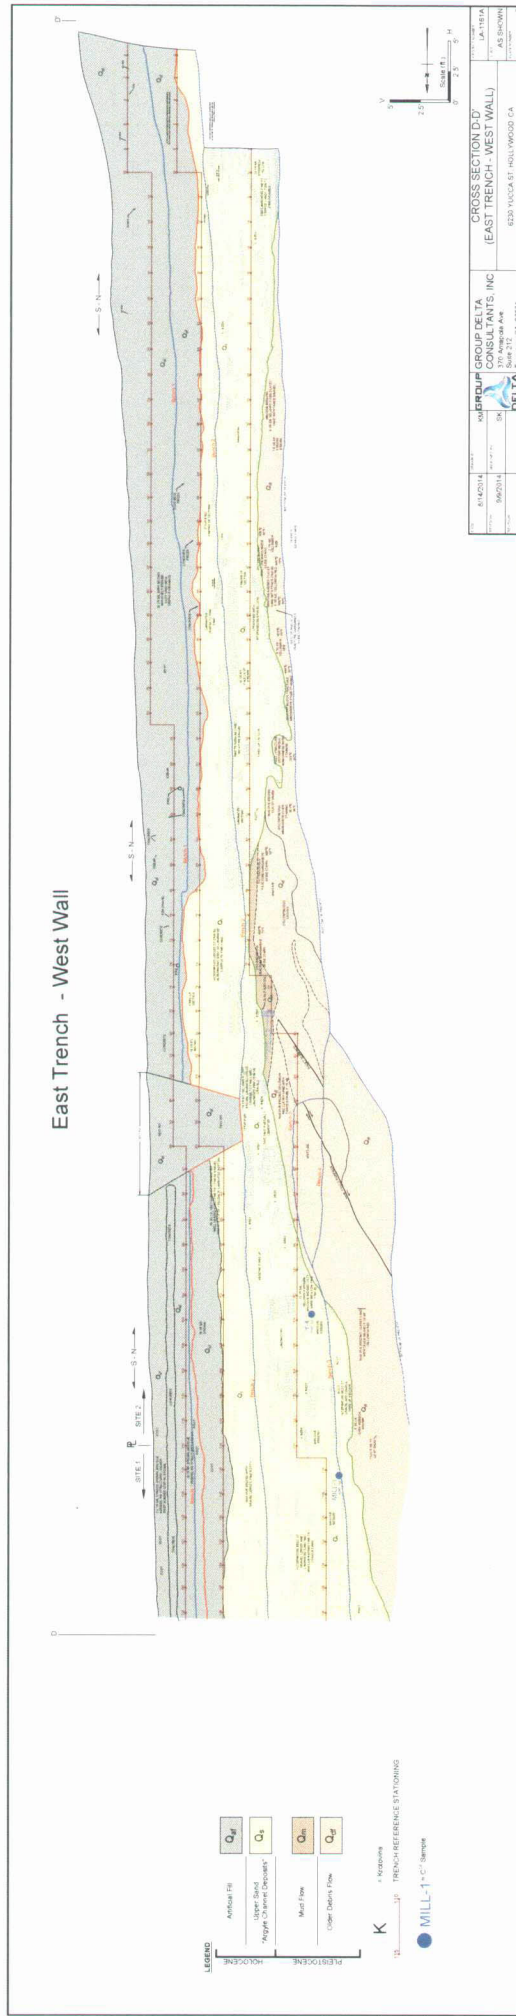

WWW.DELTACONSULTANTS.COM

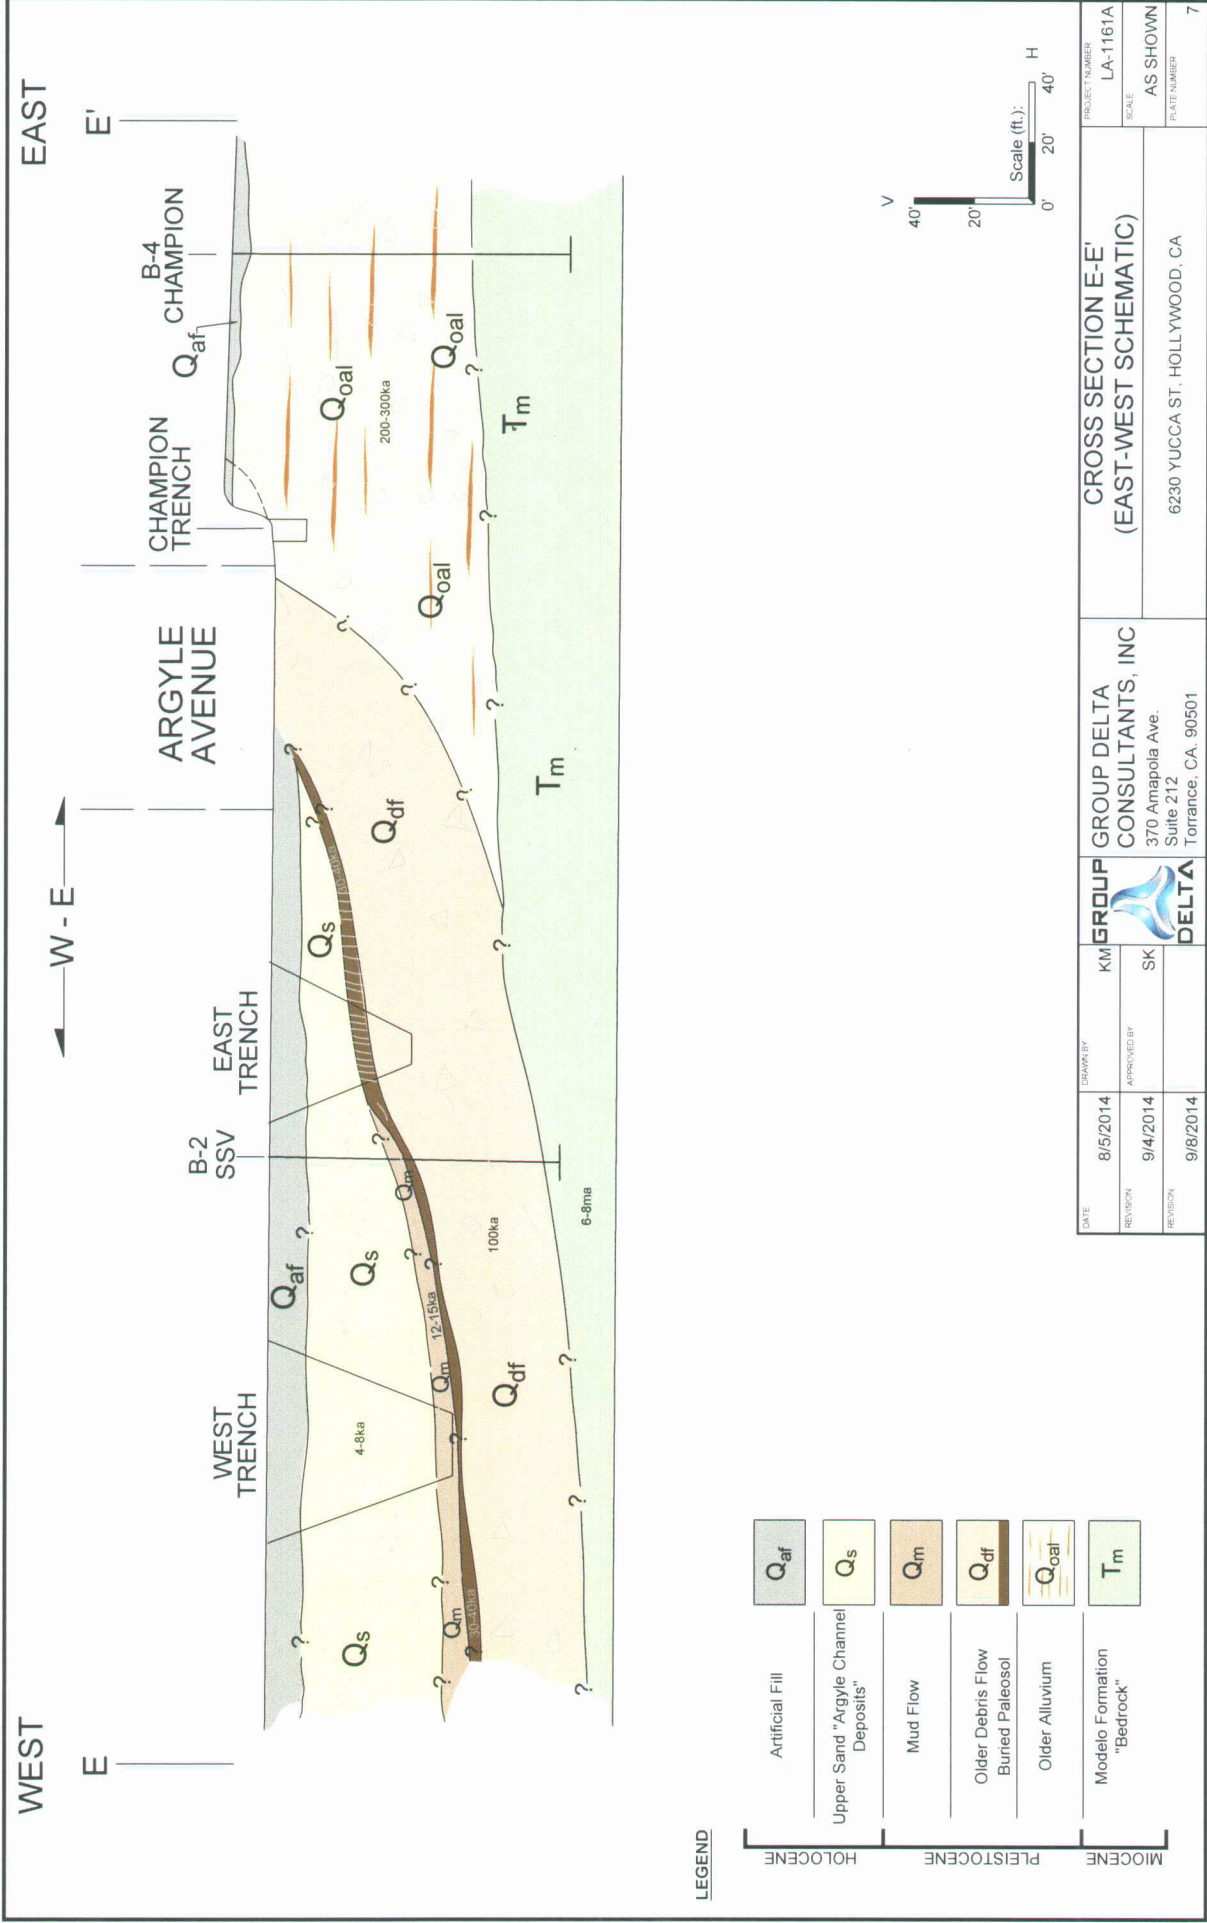


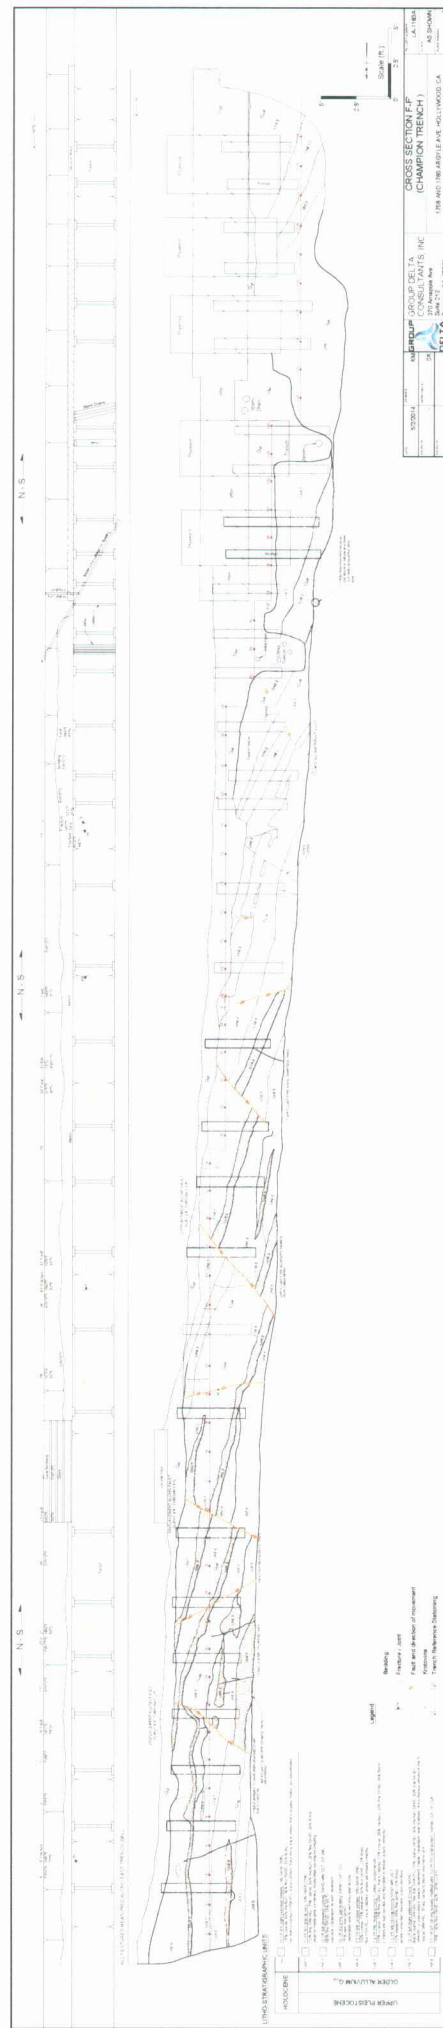

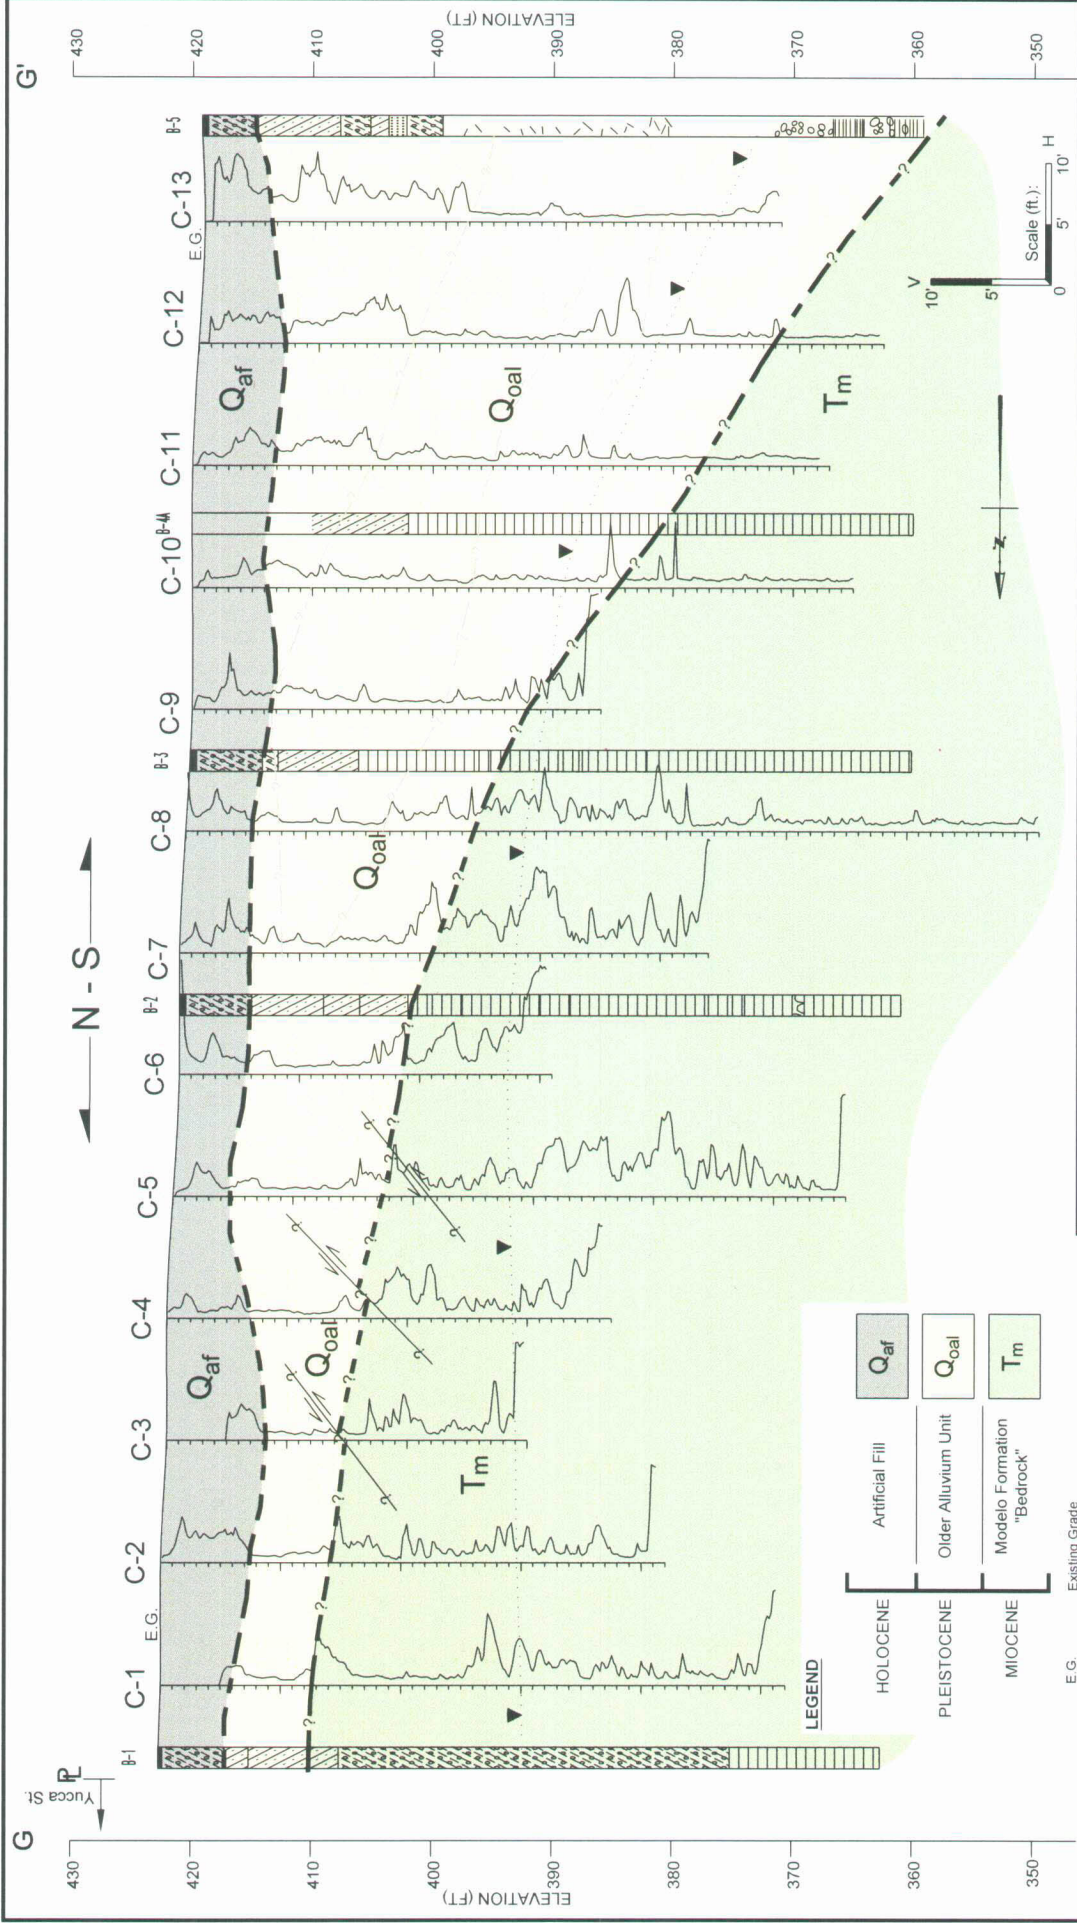



<div>C-1</div> <div></div> <div></div>	CPT Location and Number		DATE	DRAWN BY	<div>GROUP DELTA</div> <div>CONSULTANTS, INC</div> <div>370 Amapola Ave.</div> <div>Suite 212</div> <div>Torrance, CA. 90501</div>	<div>CROSS SECTION G-G'</div> <div>1756 AND 1760 ARGYLE AVE, HOLLYWOOD, CA</div>	PROJECT NUMBER	LA1183A		
	Estimated Projections of Fault from (Champion) Trench (Cross Section F-F')		REVISION	APPROVED BY			SCALE	AS SHOWN		
	Inferred Stratigraphic Style Lines		REVISION						PLATE NUMBER	9
	Water Level and Inferred Ground Water Level Across Site									

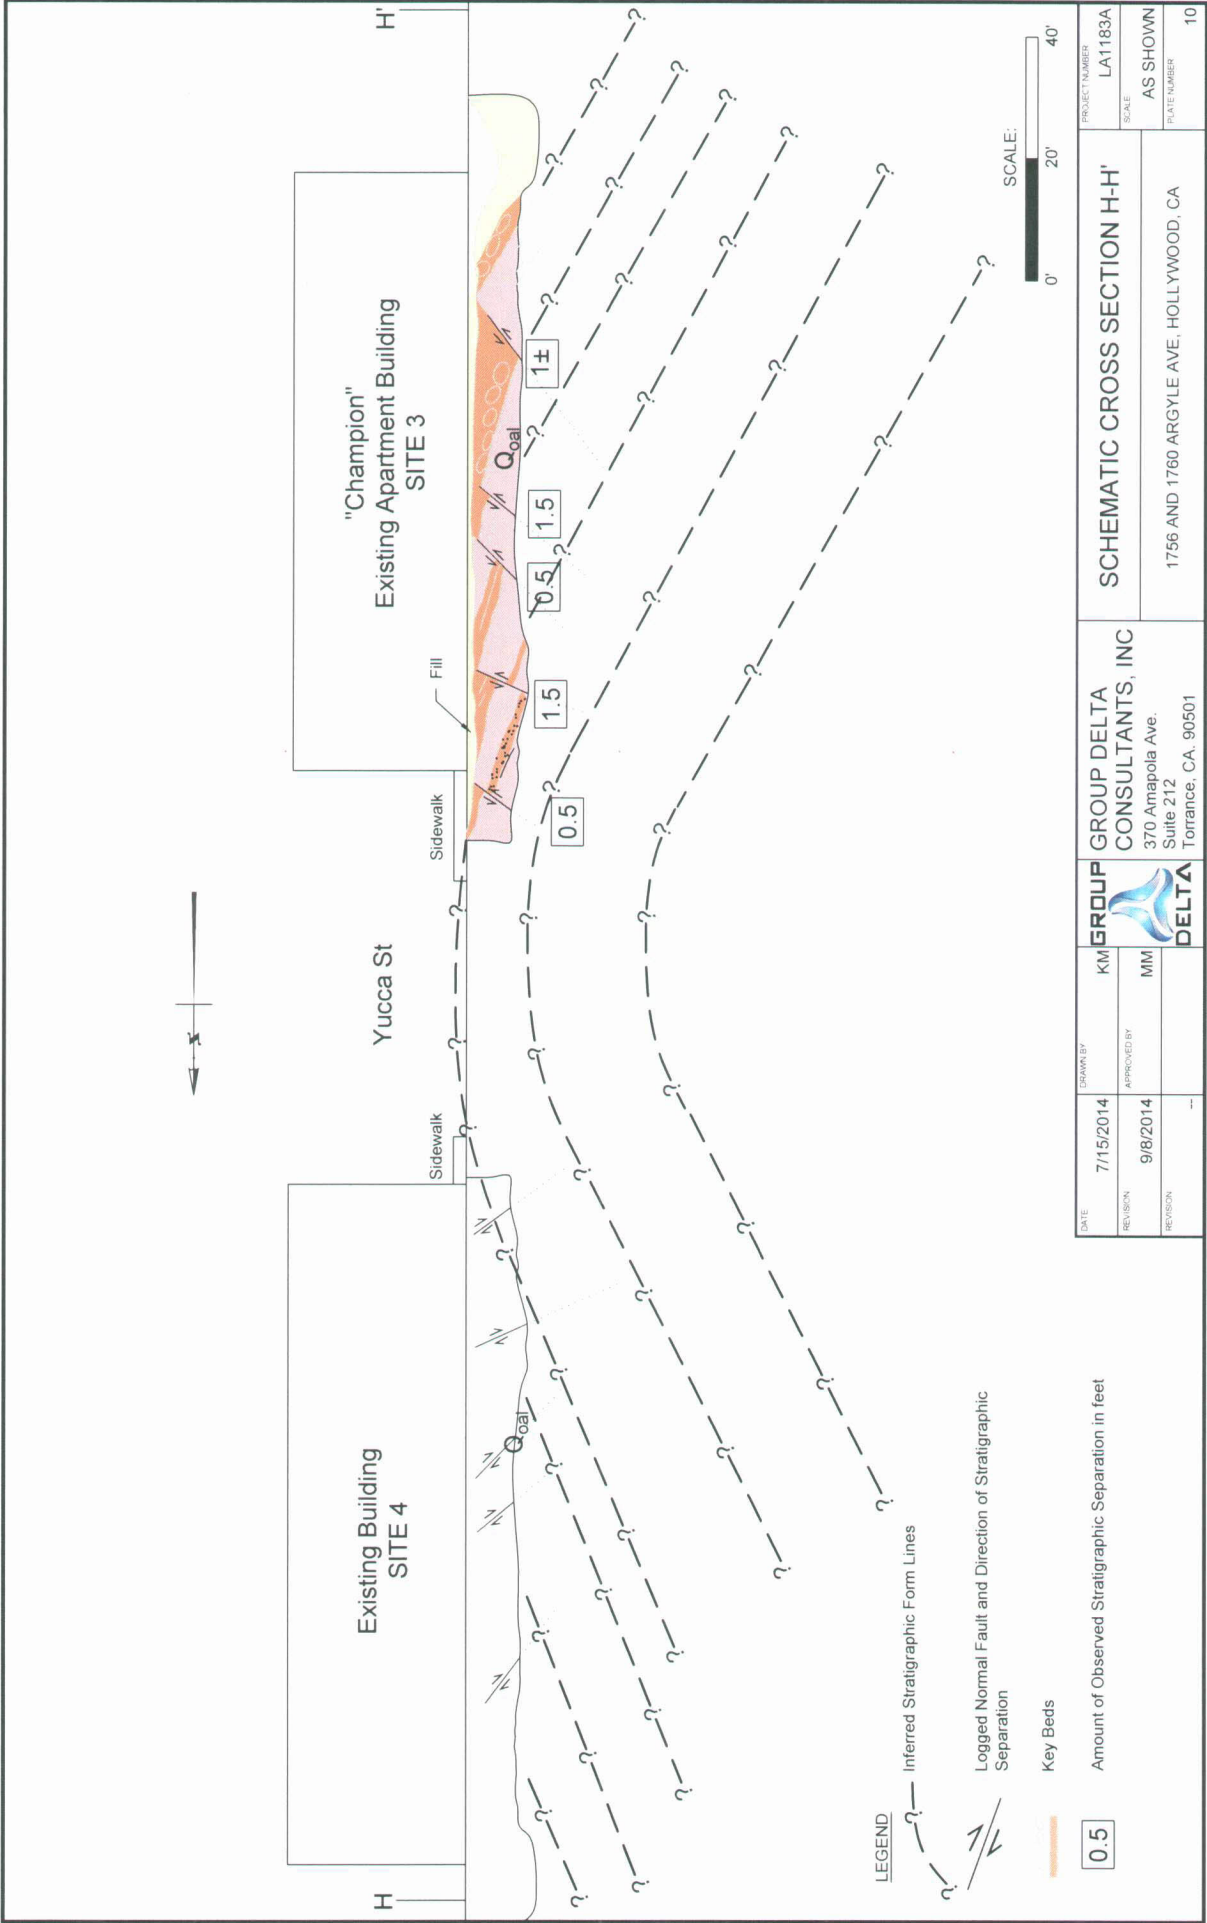


APPENDIX A: FIELD EXPLORATION – CPT DATA AND SOIL CORE LOGS SITE 3

Figure A - 1



Site: YUCCA CHAMPION
Sounding: CPT-1
Engineer: S.KOLTHOFF
Date: 1/21/2014 07:17

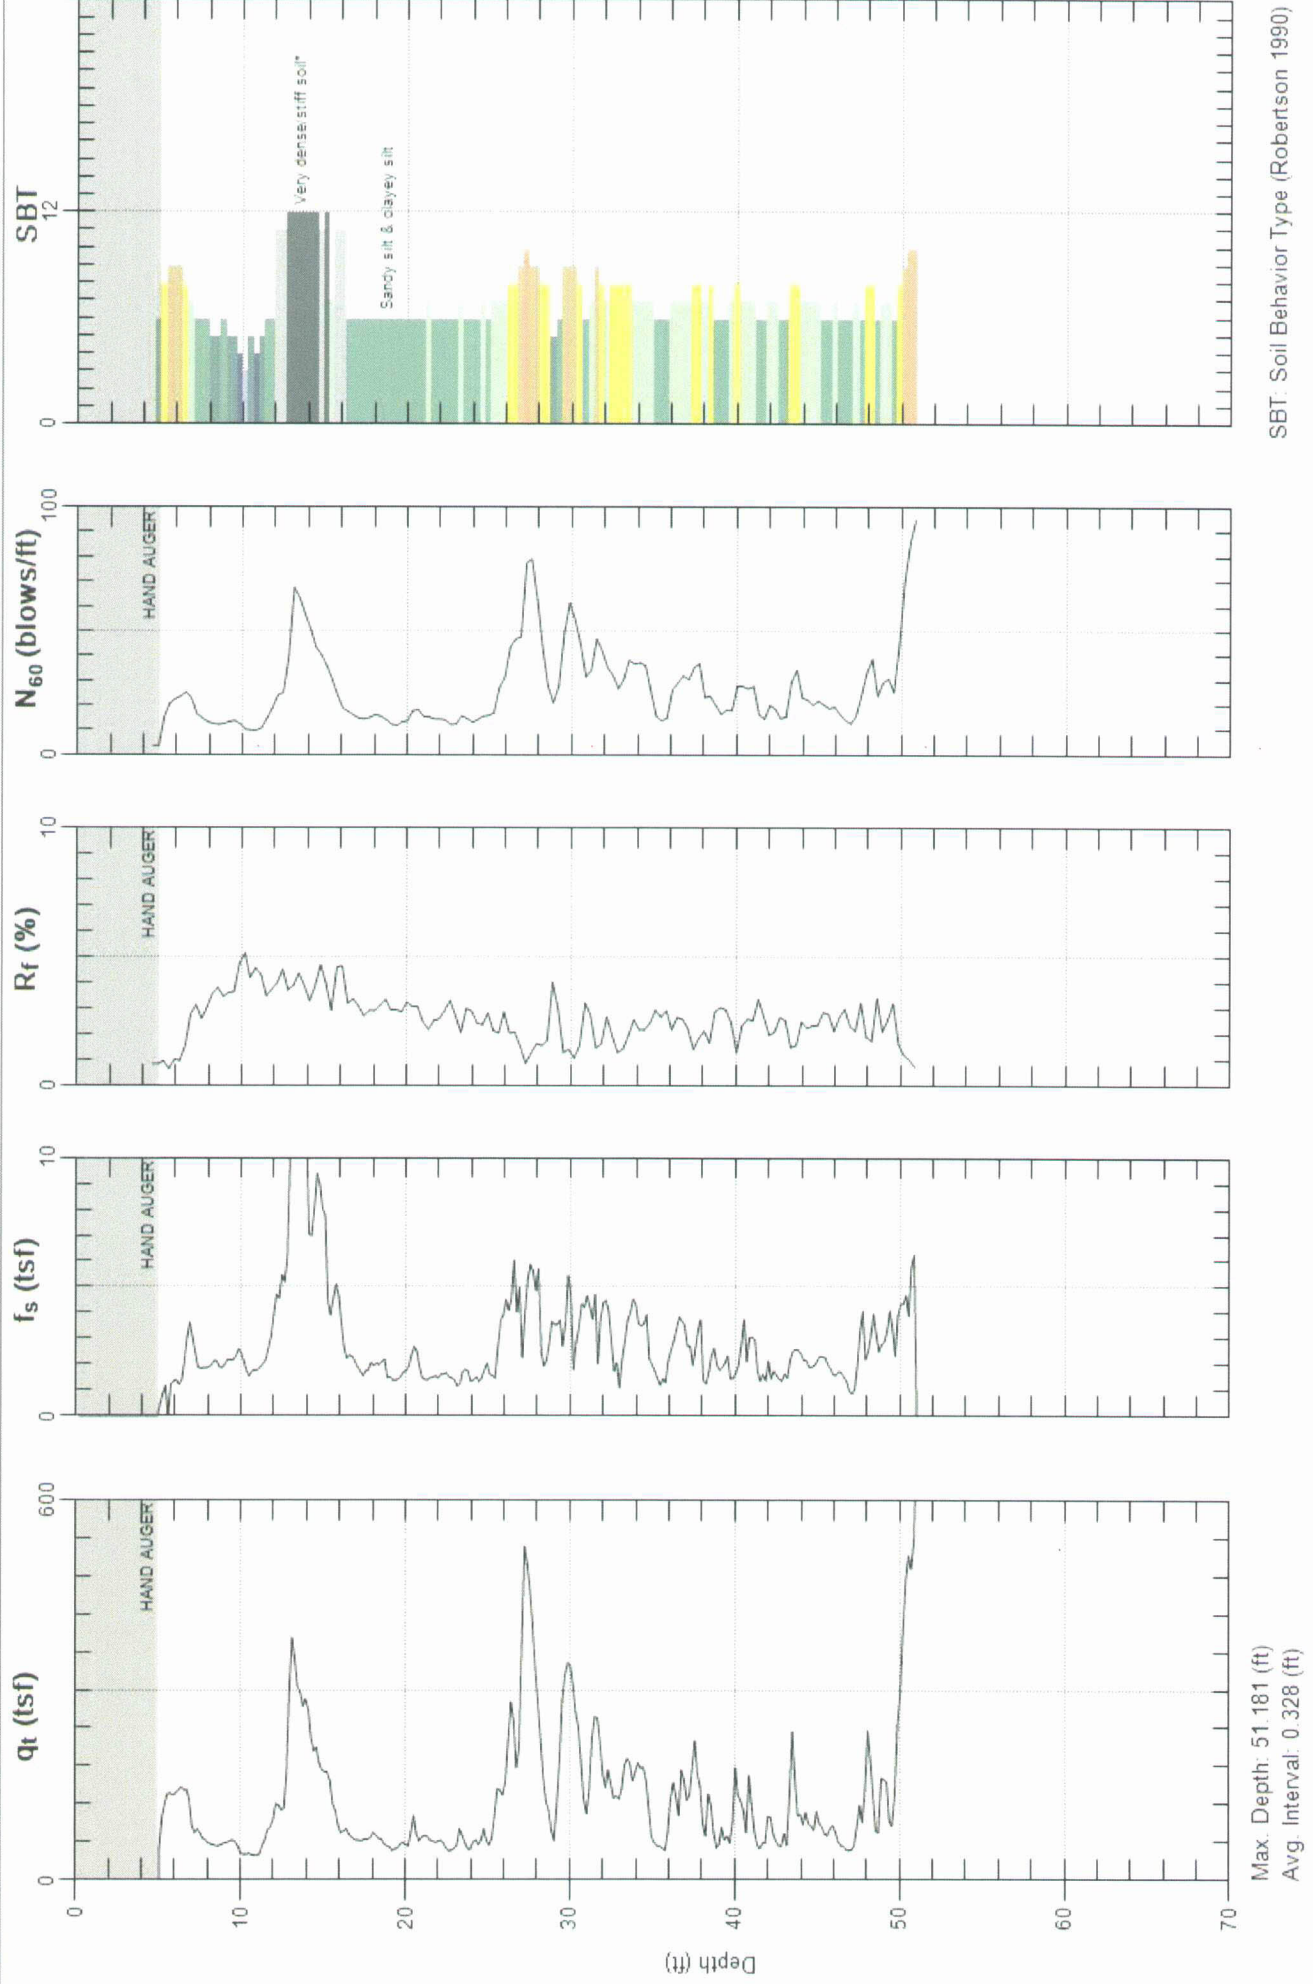


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 2



Site: YUCCA CHAMPION
Sounding: CPT-1

Engineer: S.KOLTHOFF
Date: 1/21/2014 07:17

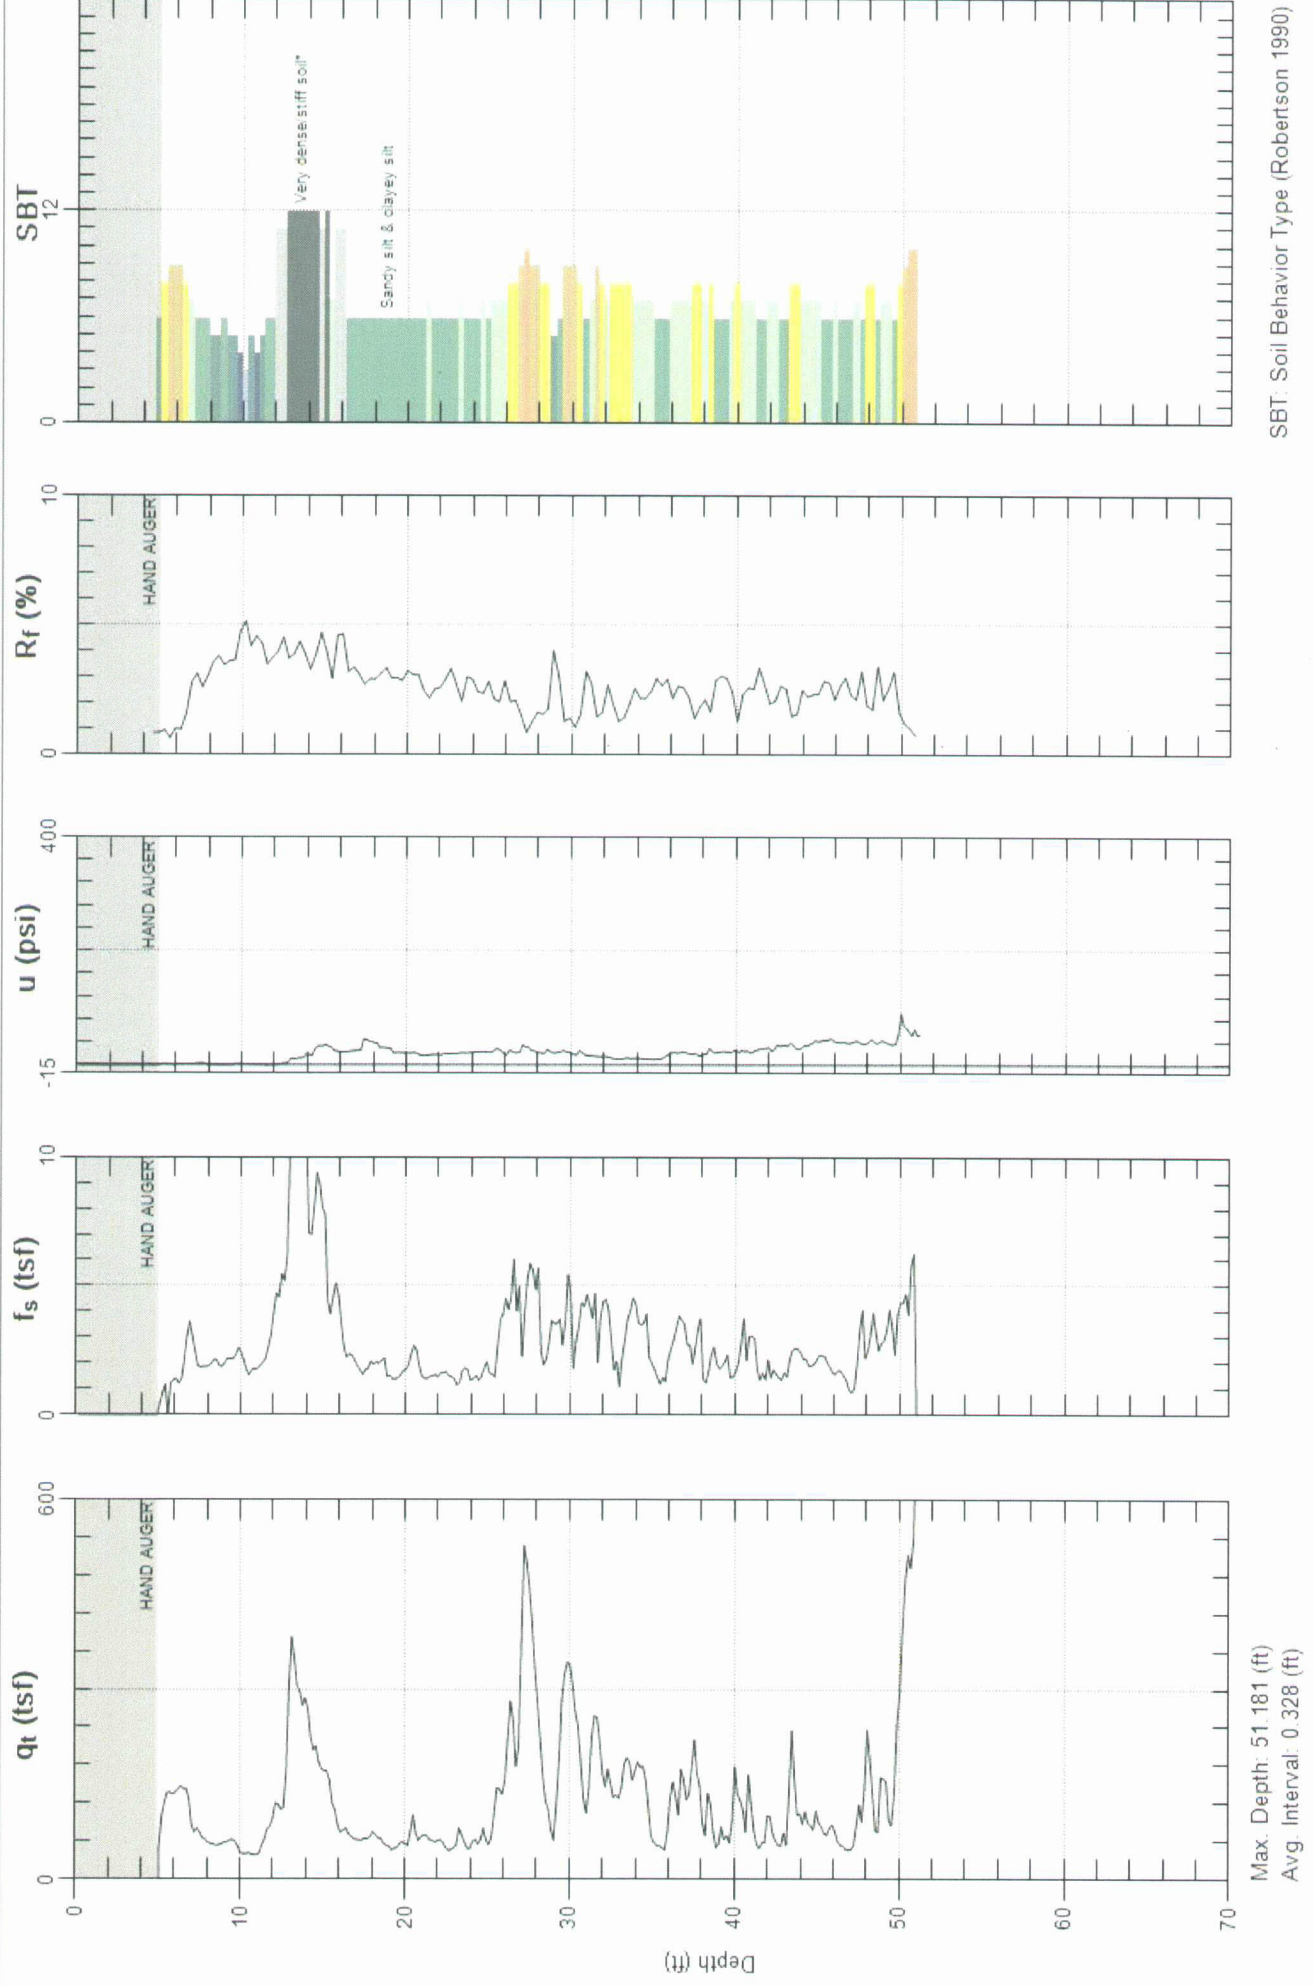

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 3




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-2

Date: 1/21/2014 08:52

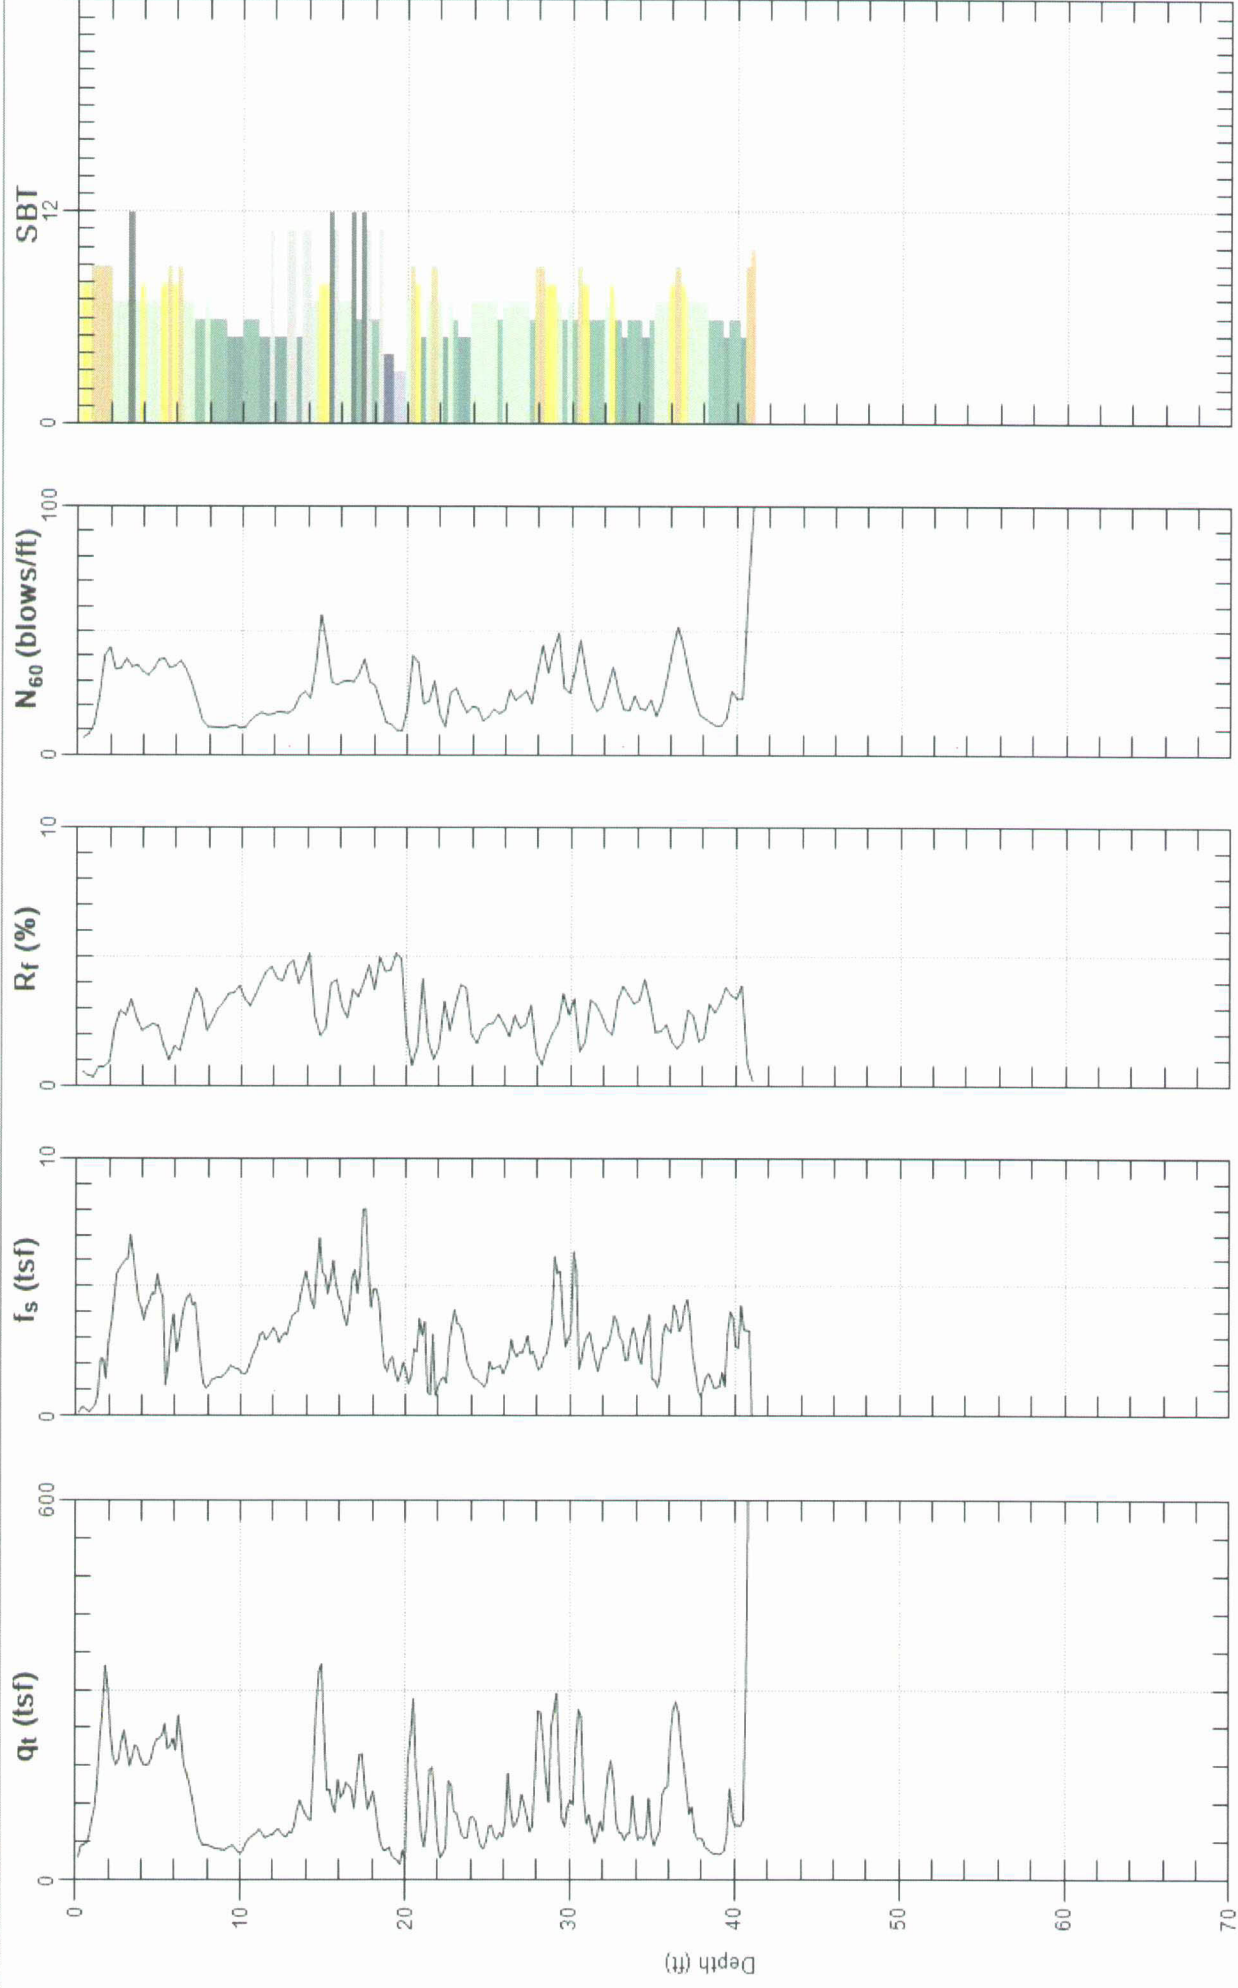

Max. Depth: 41.175 (ft)
Avg. Interval: 0.328 (ft)


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 4



Site: YUCCA CHAMPION
Sounding: CPT-2

Engineer: S.KOLTHOFF
Date: 1/21/2014 08:52

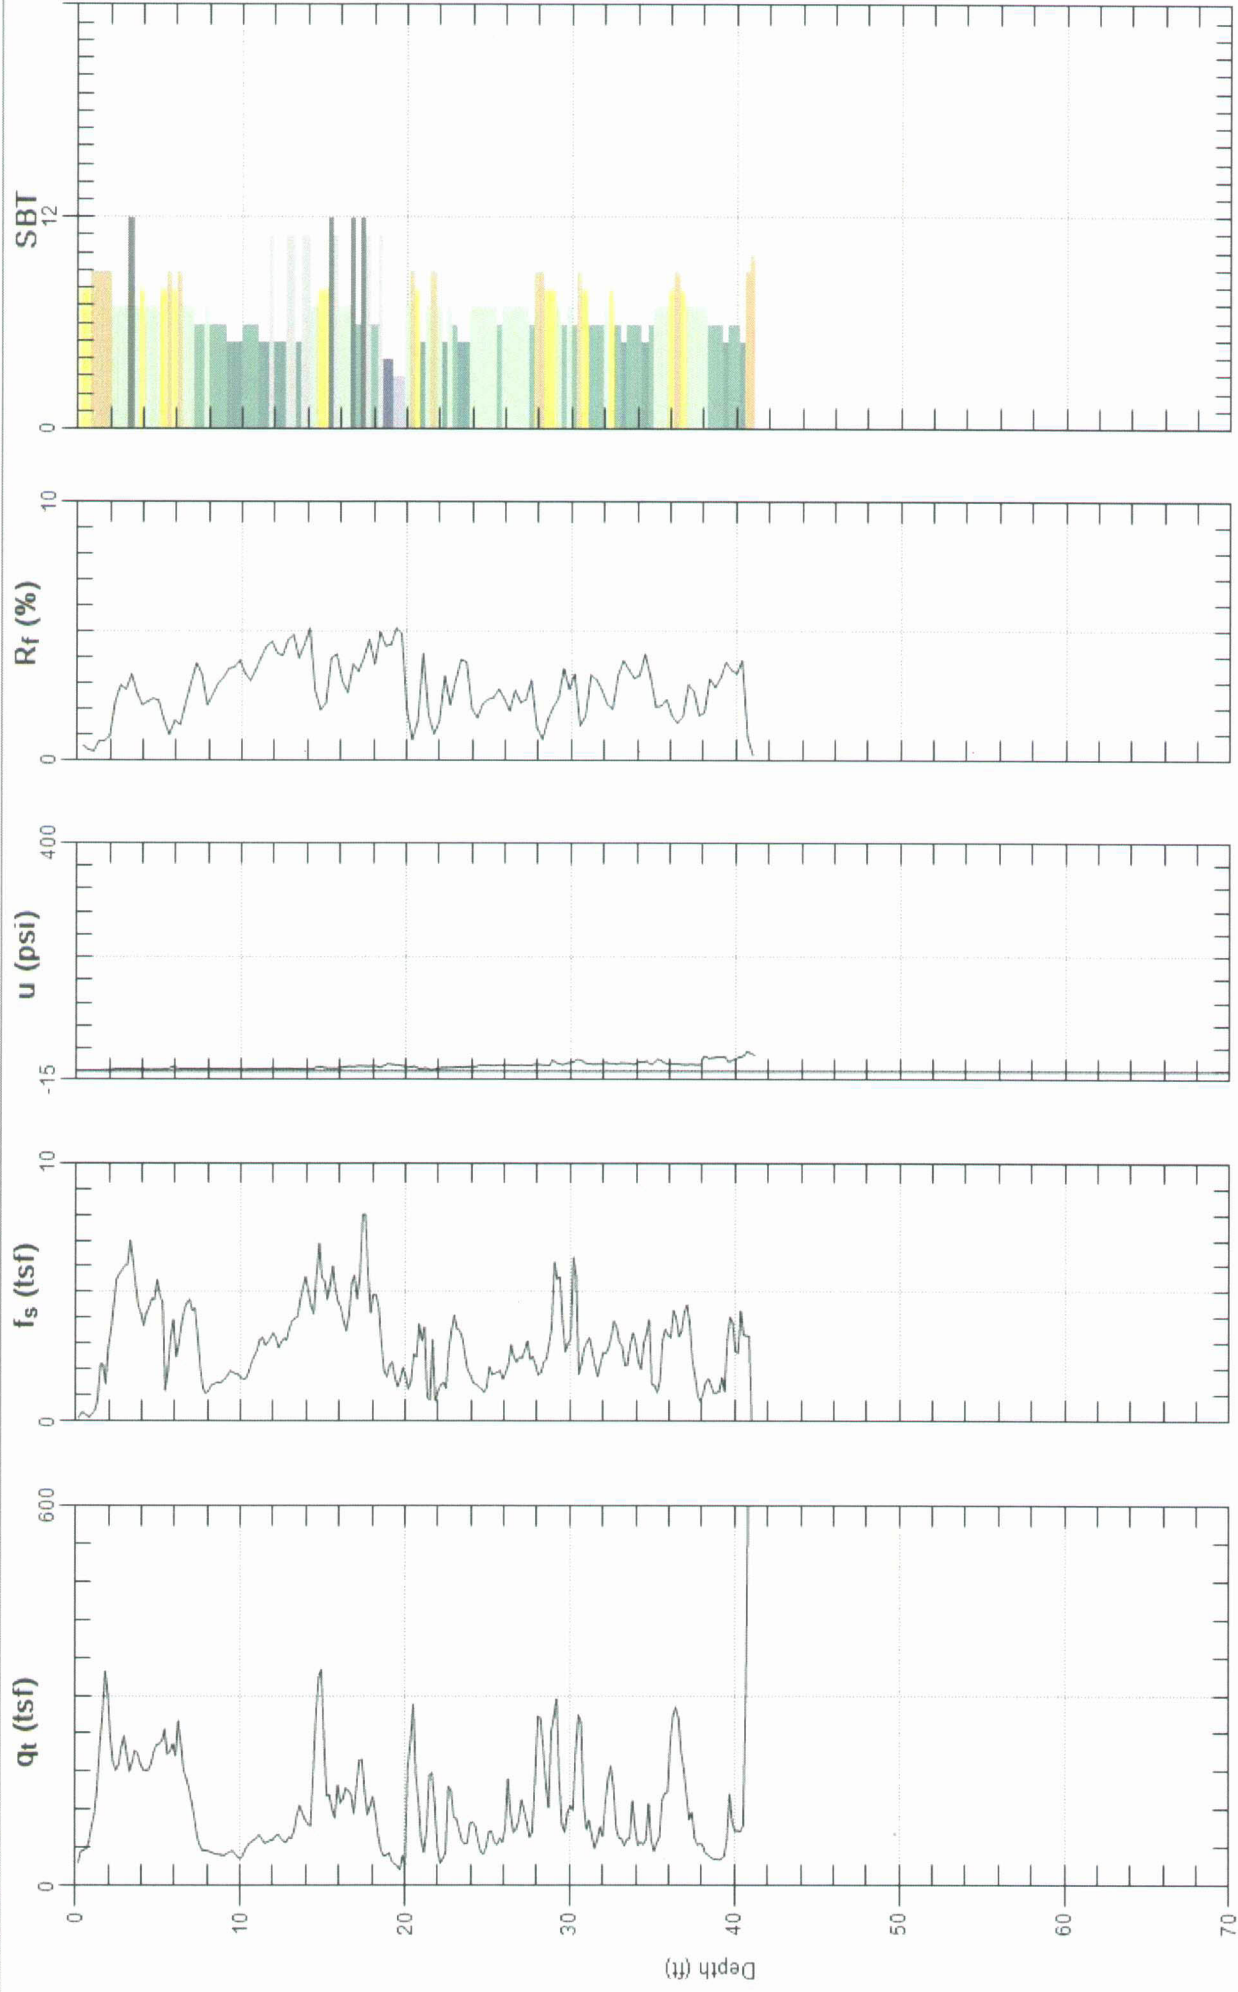

Max. Depth: 41.175 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 5




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-3

Date: 1/21/2014 09:18

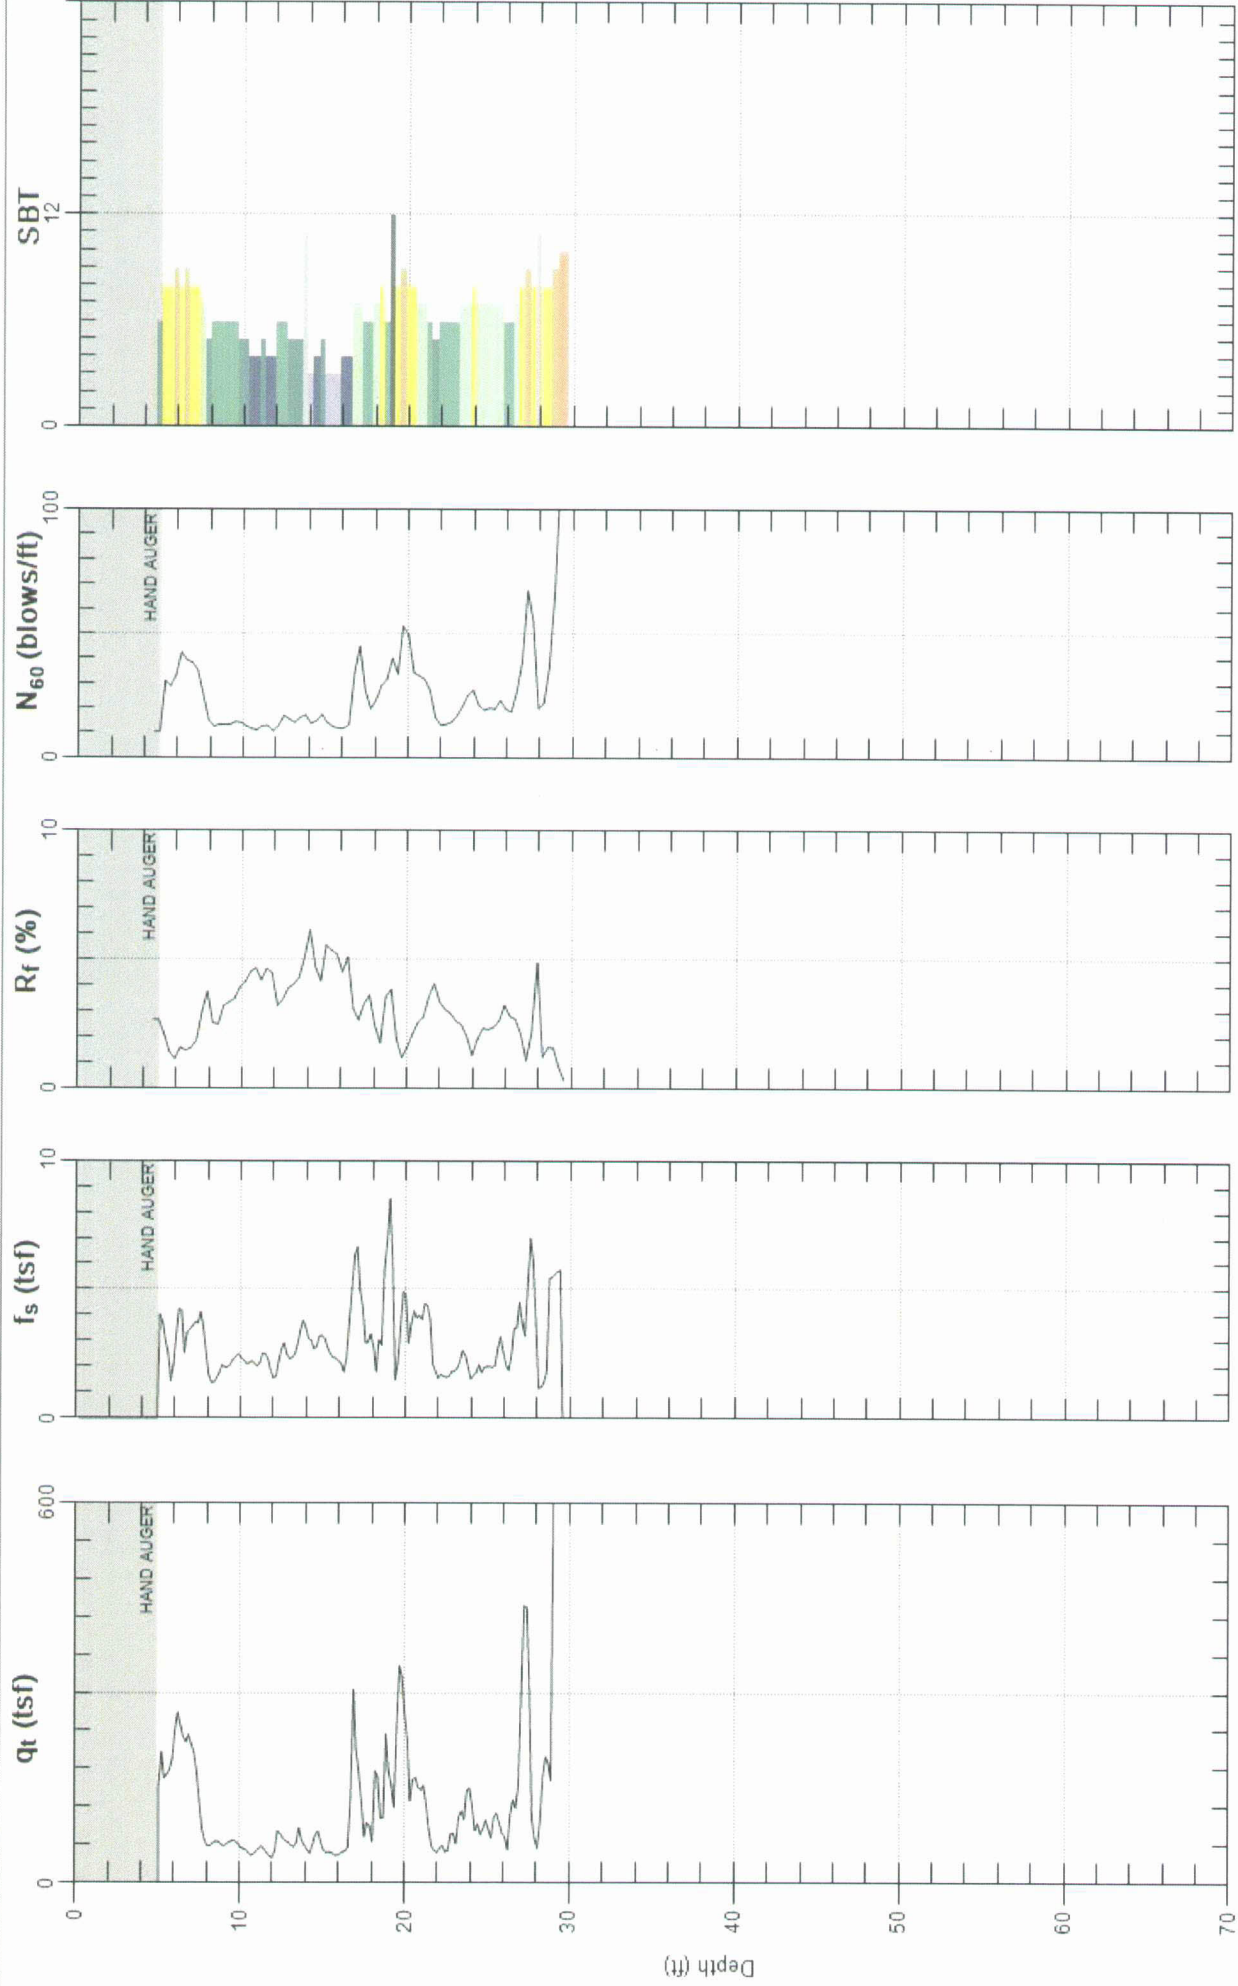

Max. Depth: 29.692 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 6



Site: YUCCA CHAMPION
Sounding: CPT-3

Engineer: S.KOLTHOFF
Date: 1/21/2014 09:18


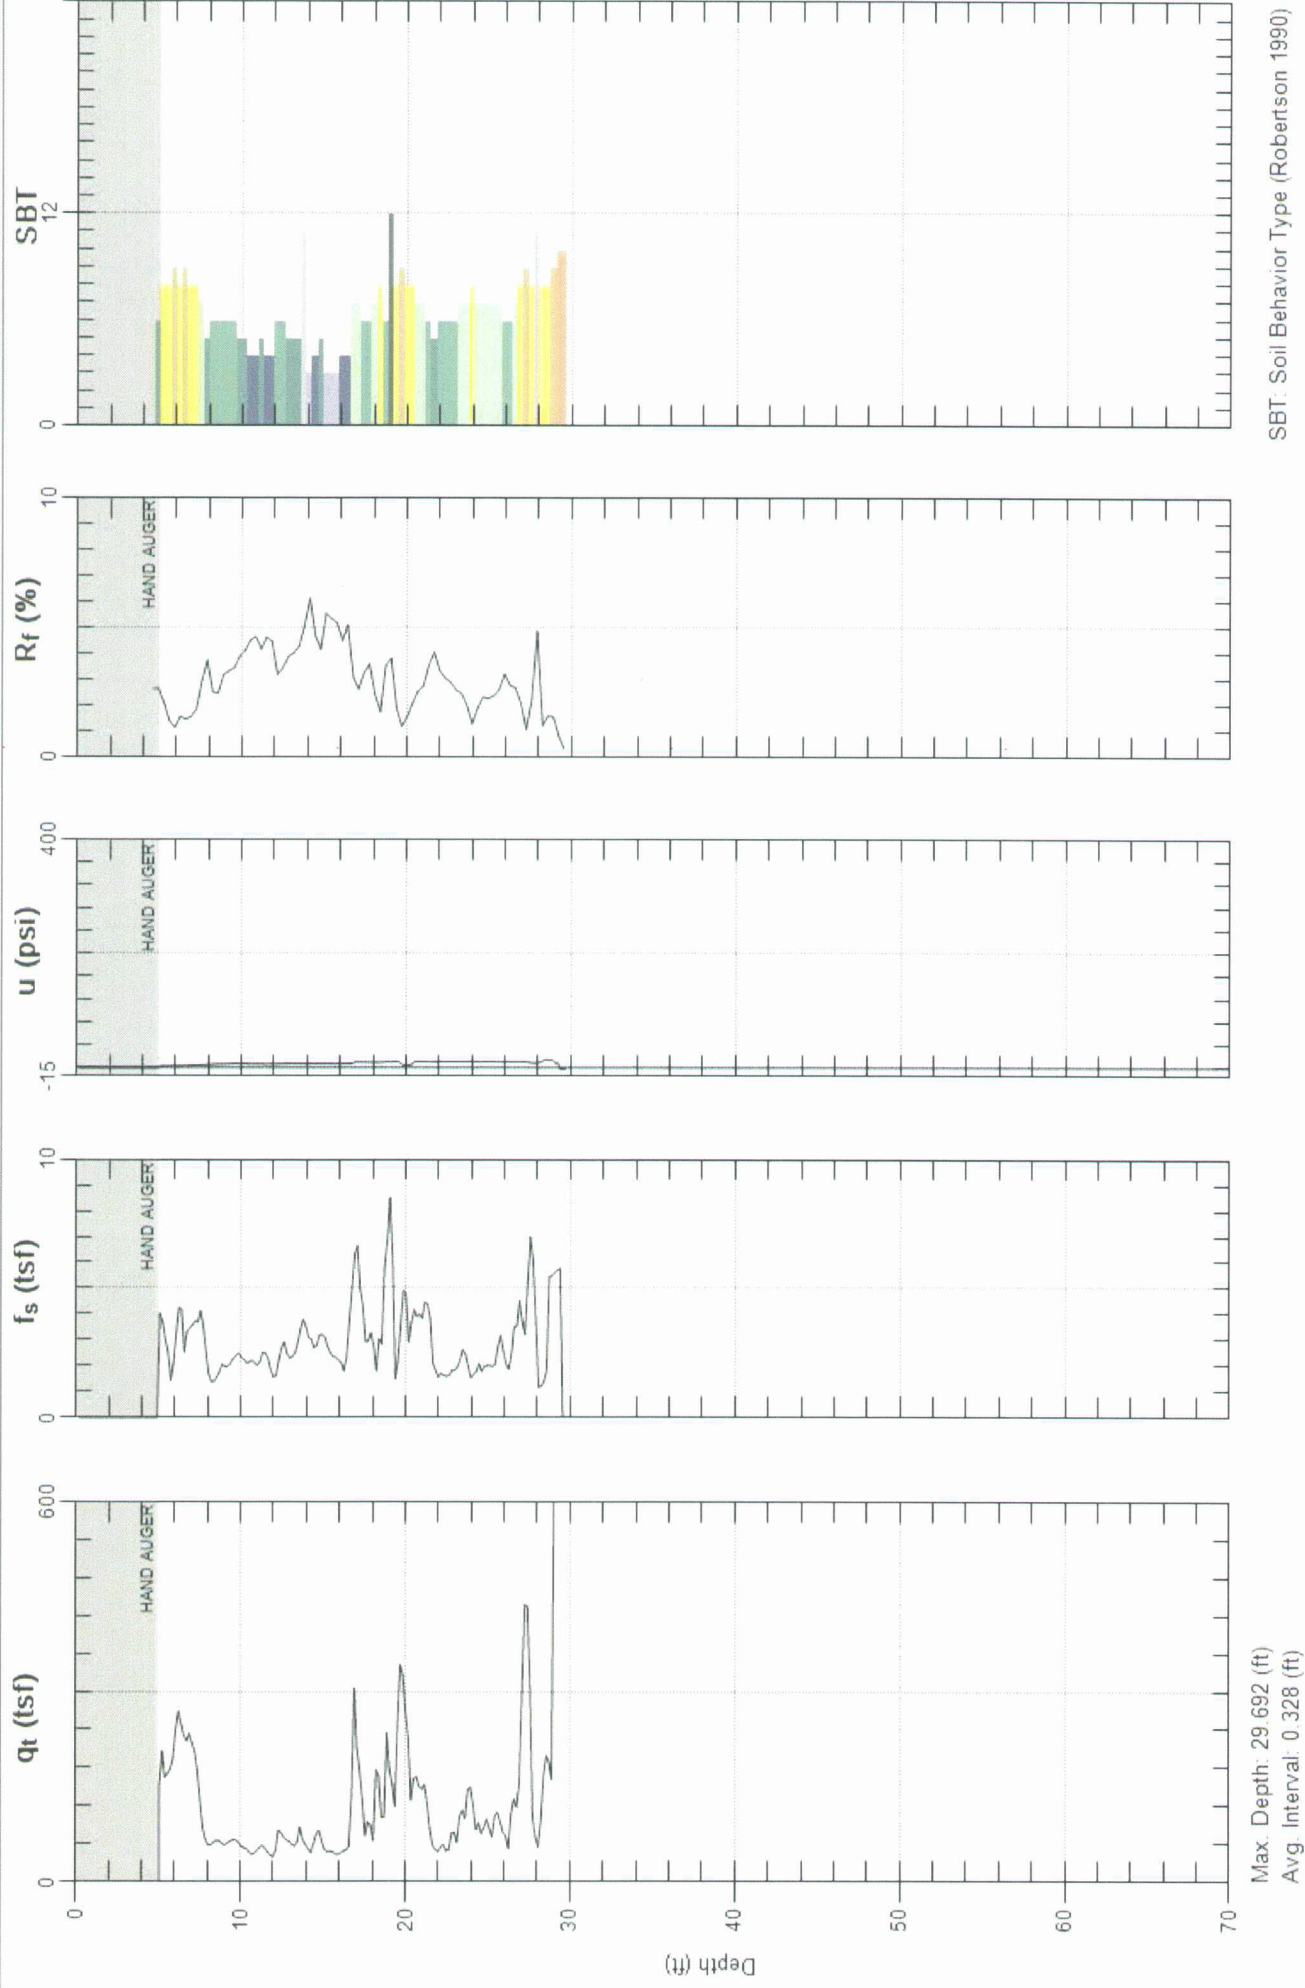


Figure A - 7



Site: YUCCA CHAMPION
Sounding: CPT-4

Engineer: S.KOLTHOFF
Date: 1/21/2014 10:02

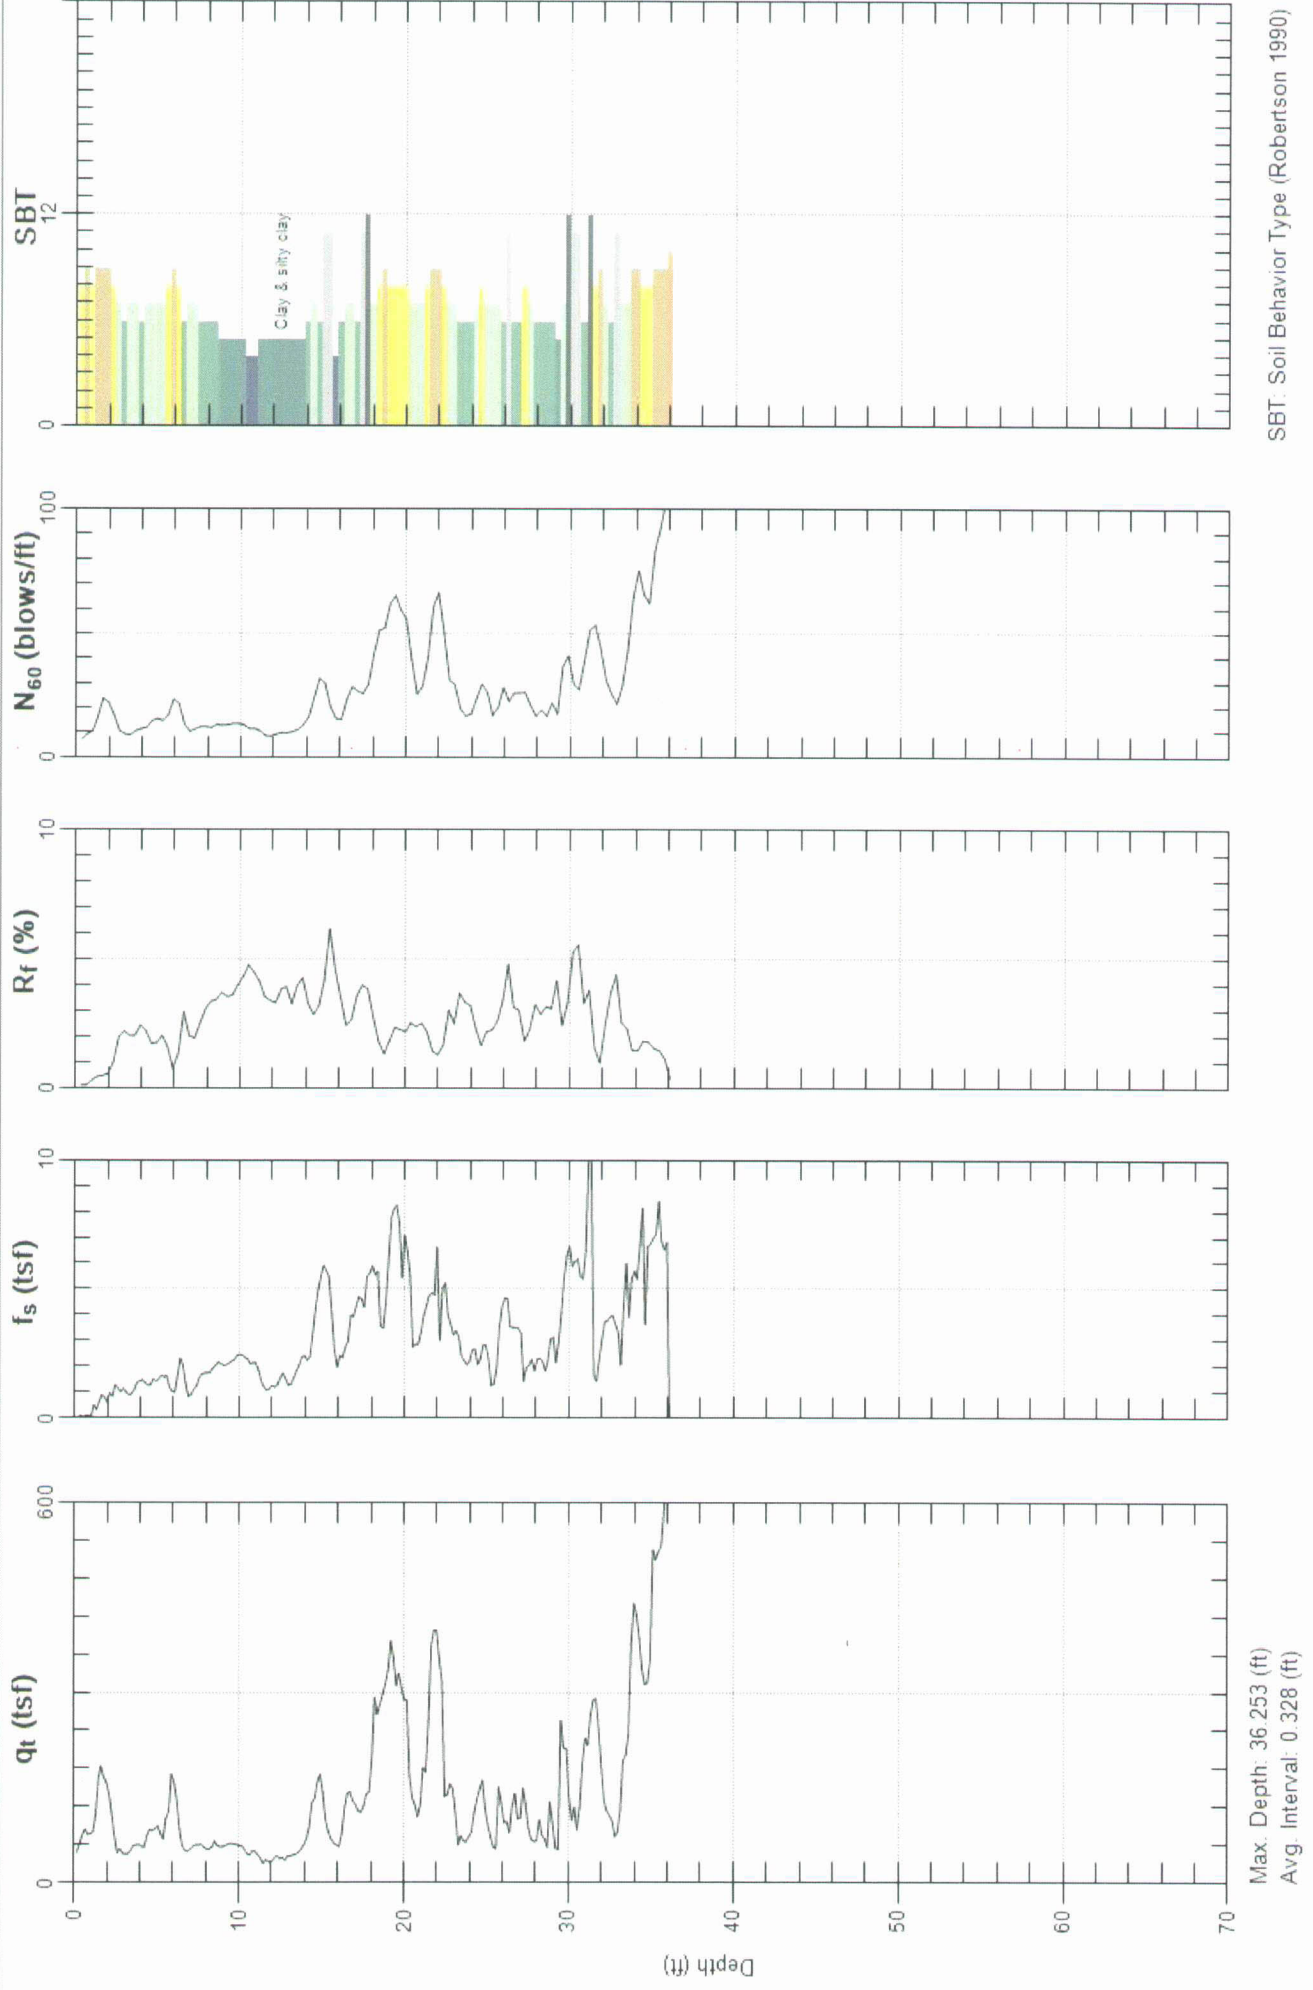


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 8



Site: YUCCA CHAMPION
Sounding: CPT-4

Engineer: S.KOLTHOFF
Date: 1/21/2014 10:02

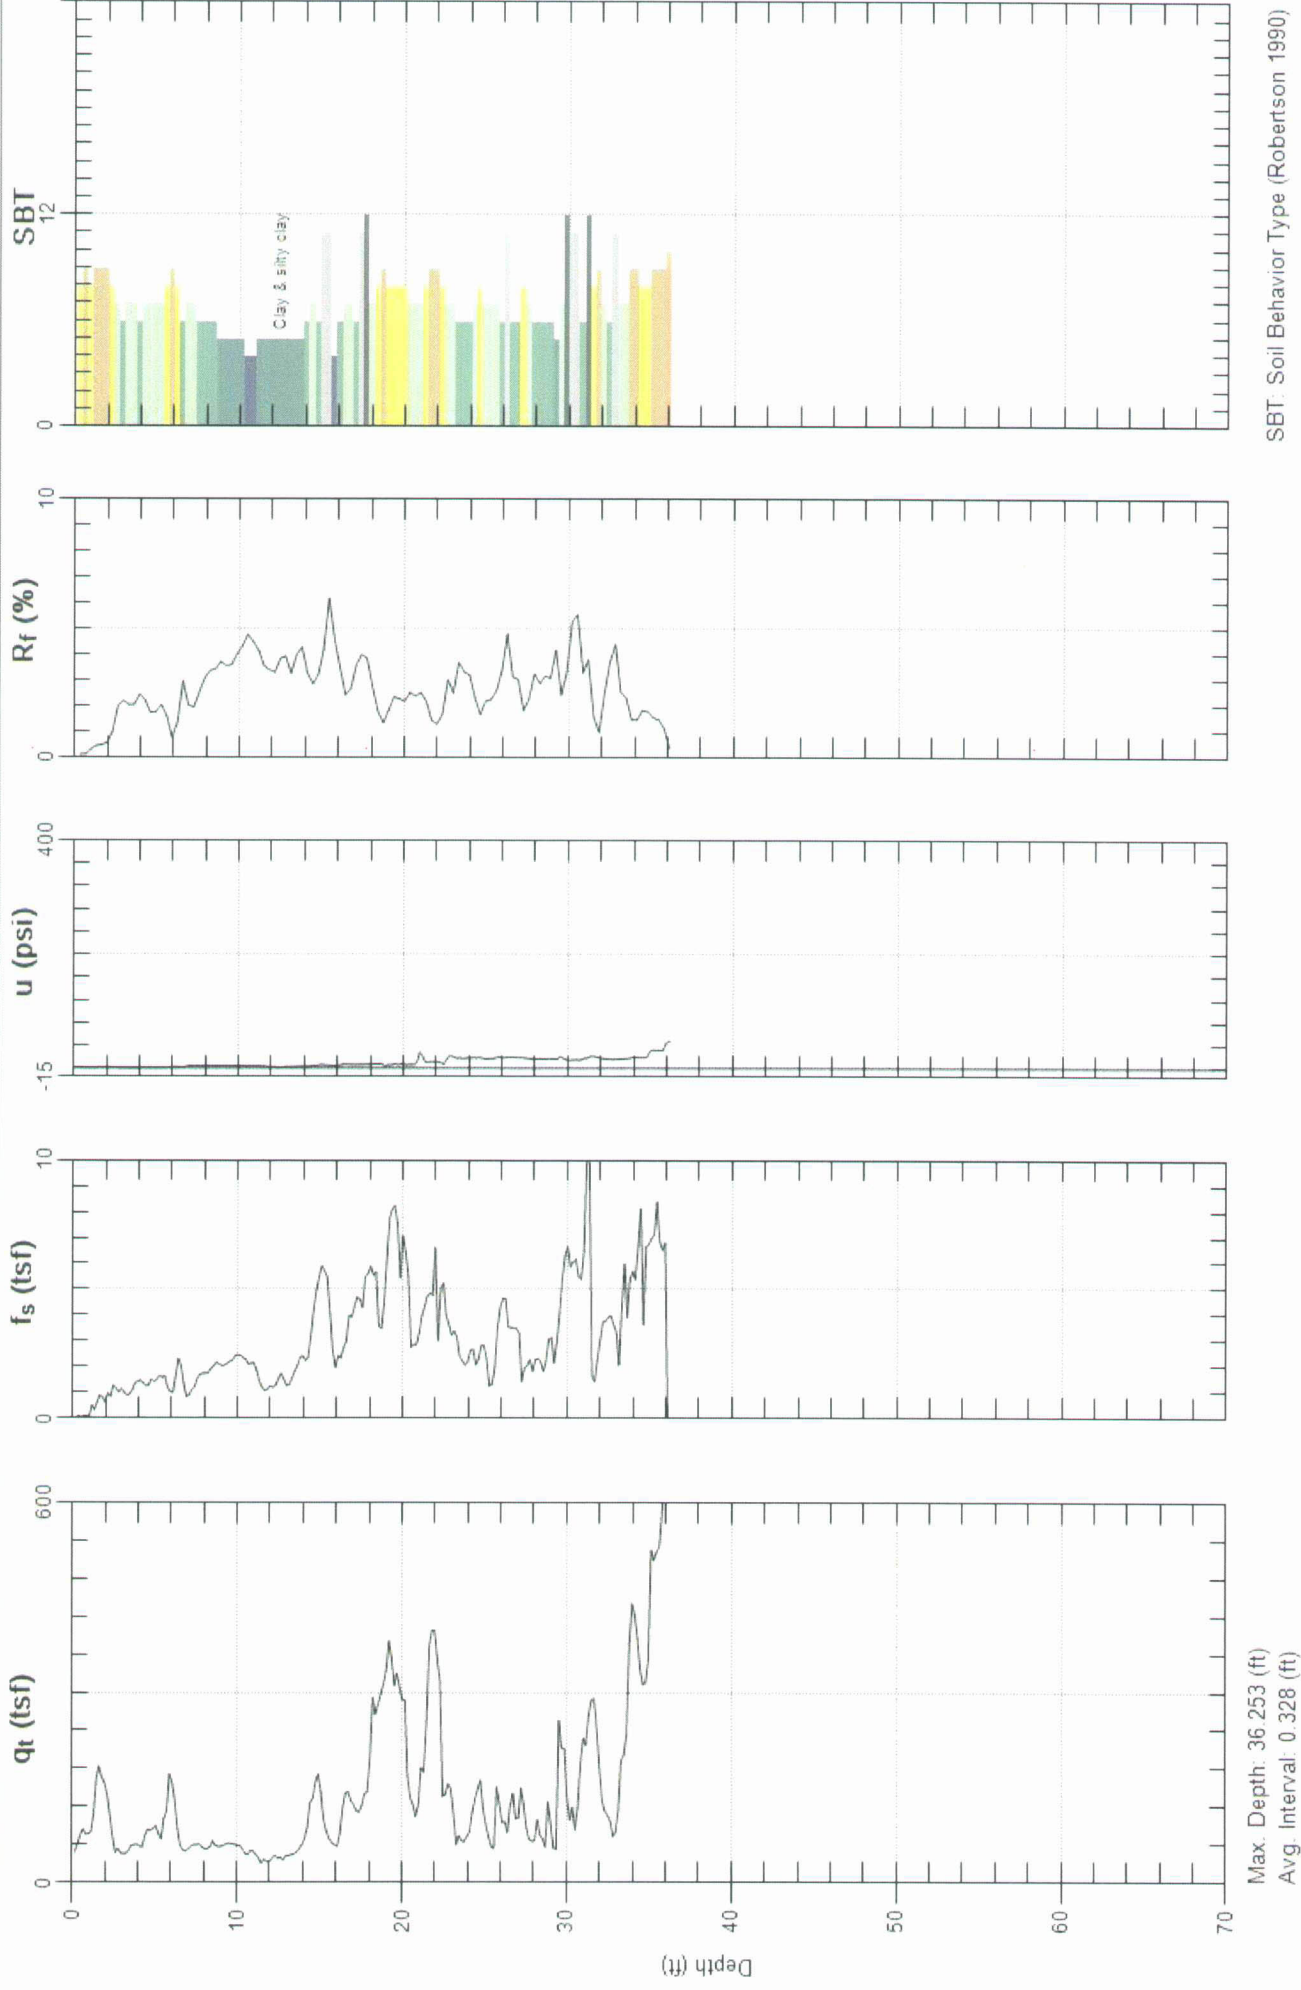


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 9



Site: YUCCA CHAMPION
Sounding: CPT-5
Engineer: S.KOLTHOFF
Date: 1/21/2014 10:27

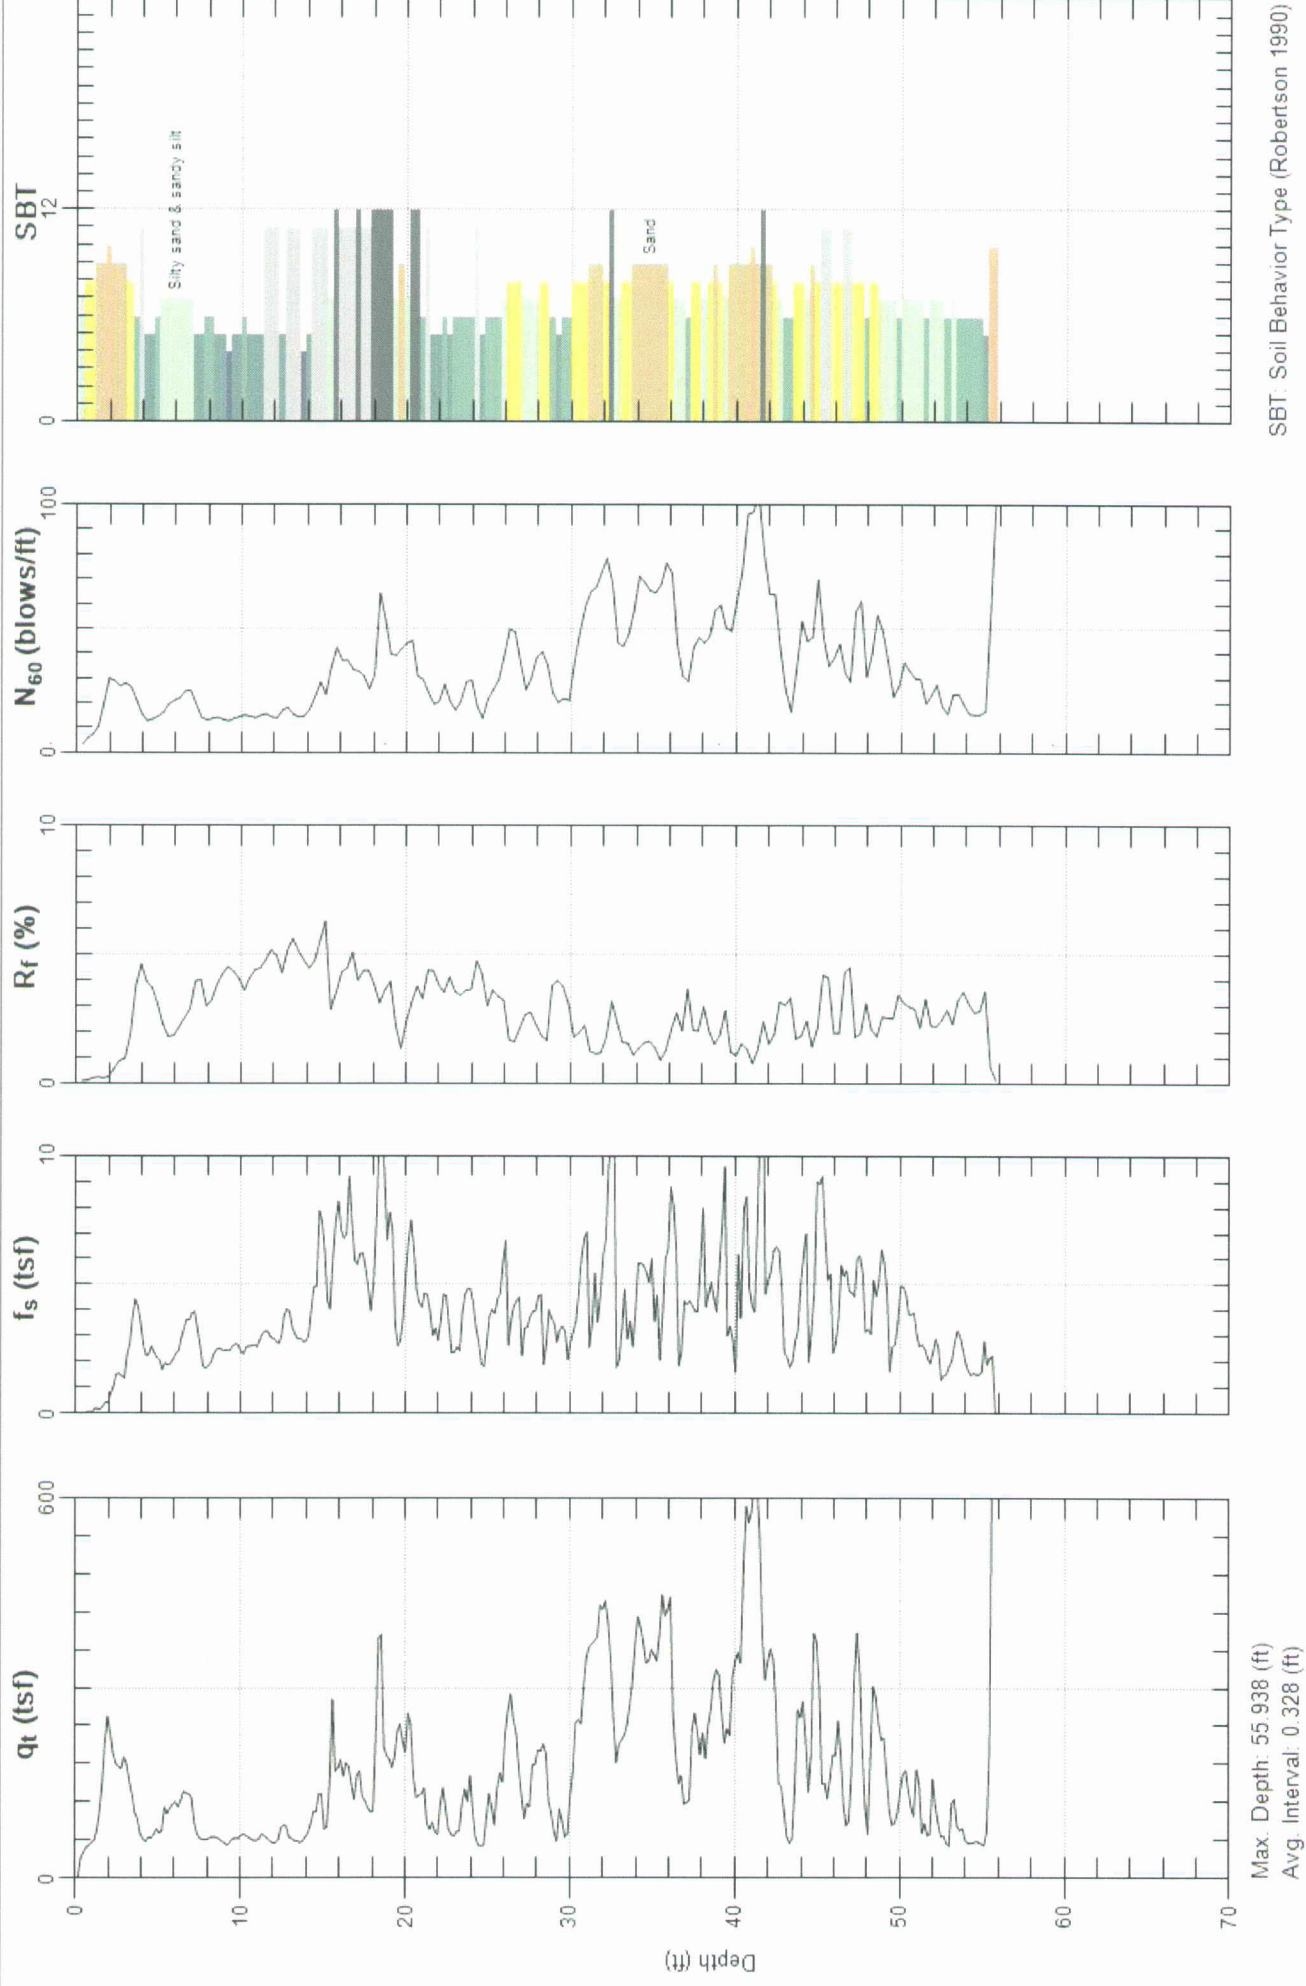

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 10




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-5

Date: 1/21/2014 10:27

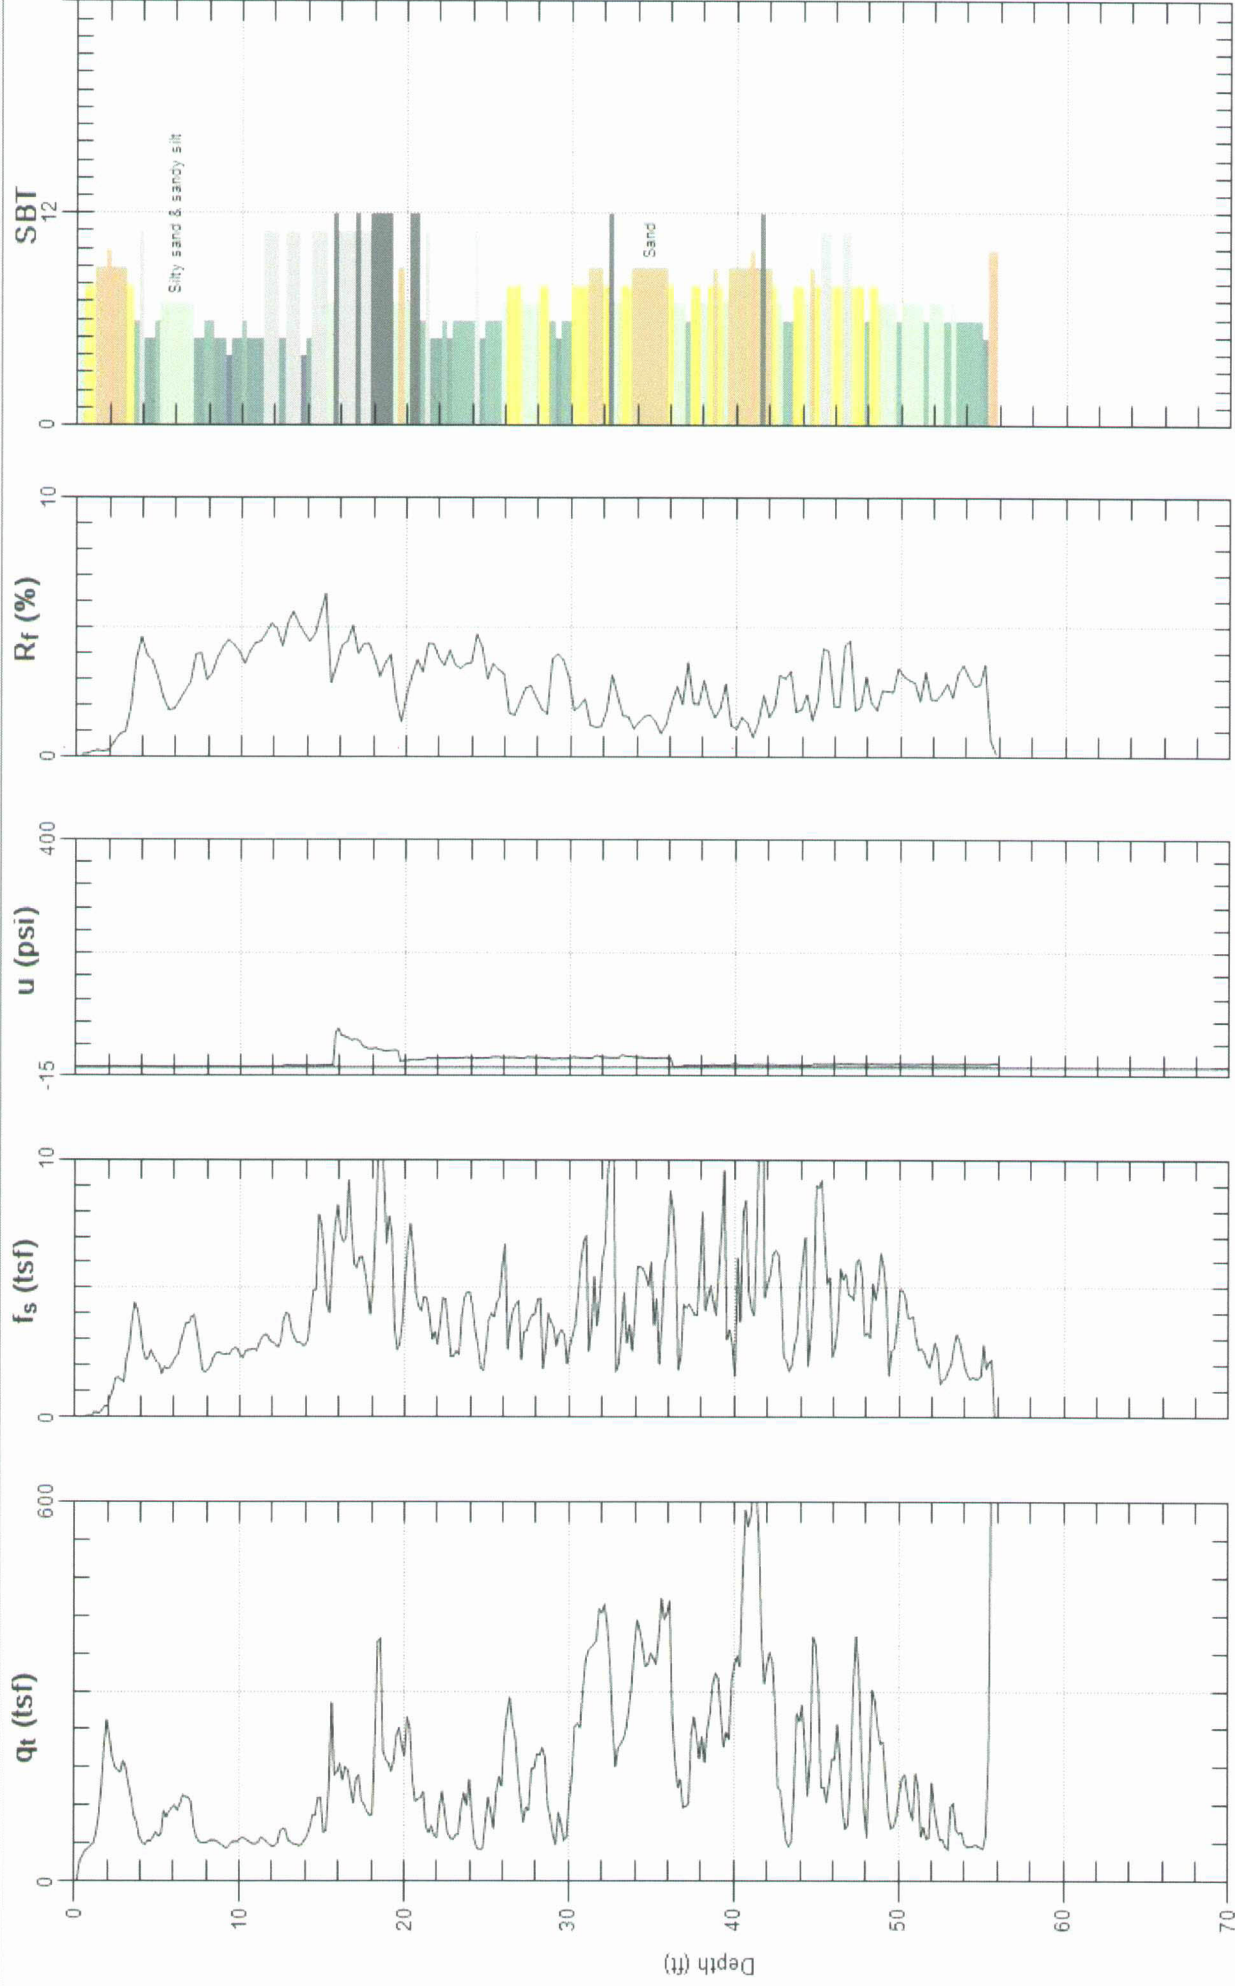


Max. Depth: 55.938 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 11



Site: YUCCA CHAMPION
Sounding: CPT-6A
Engineer: S.KOLTHOFF
Date: 1/21/2014 12:05

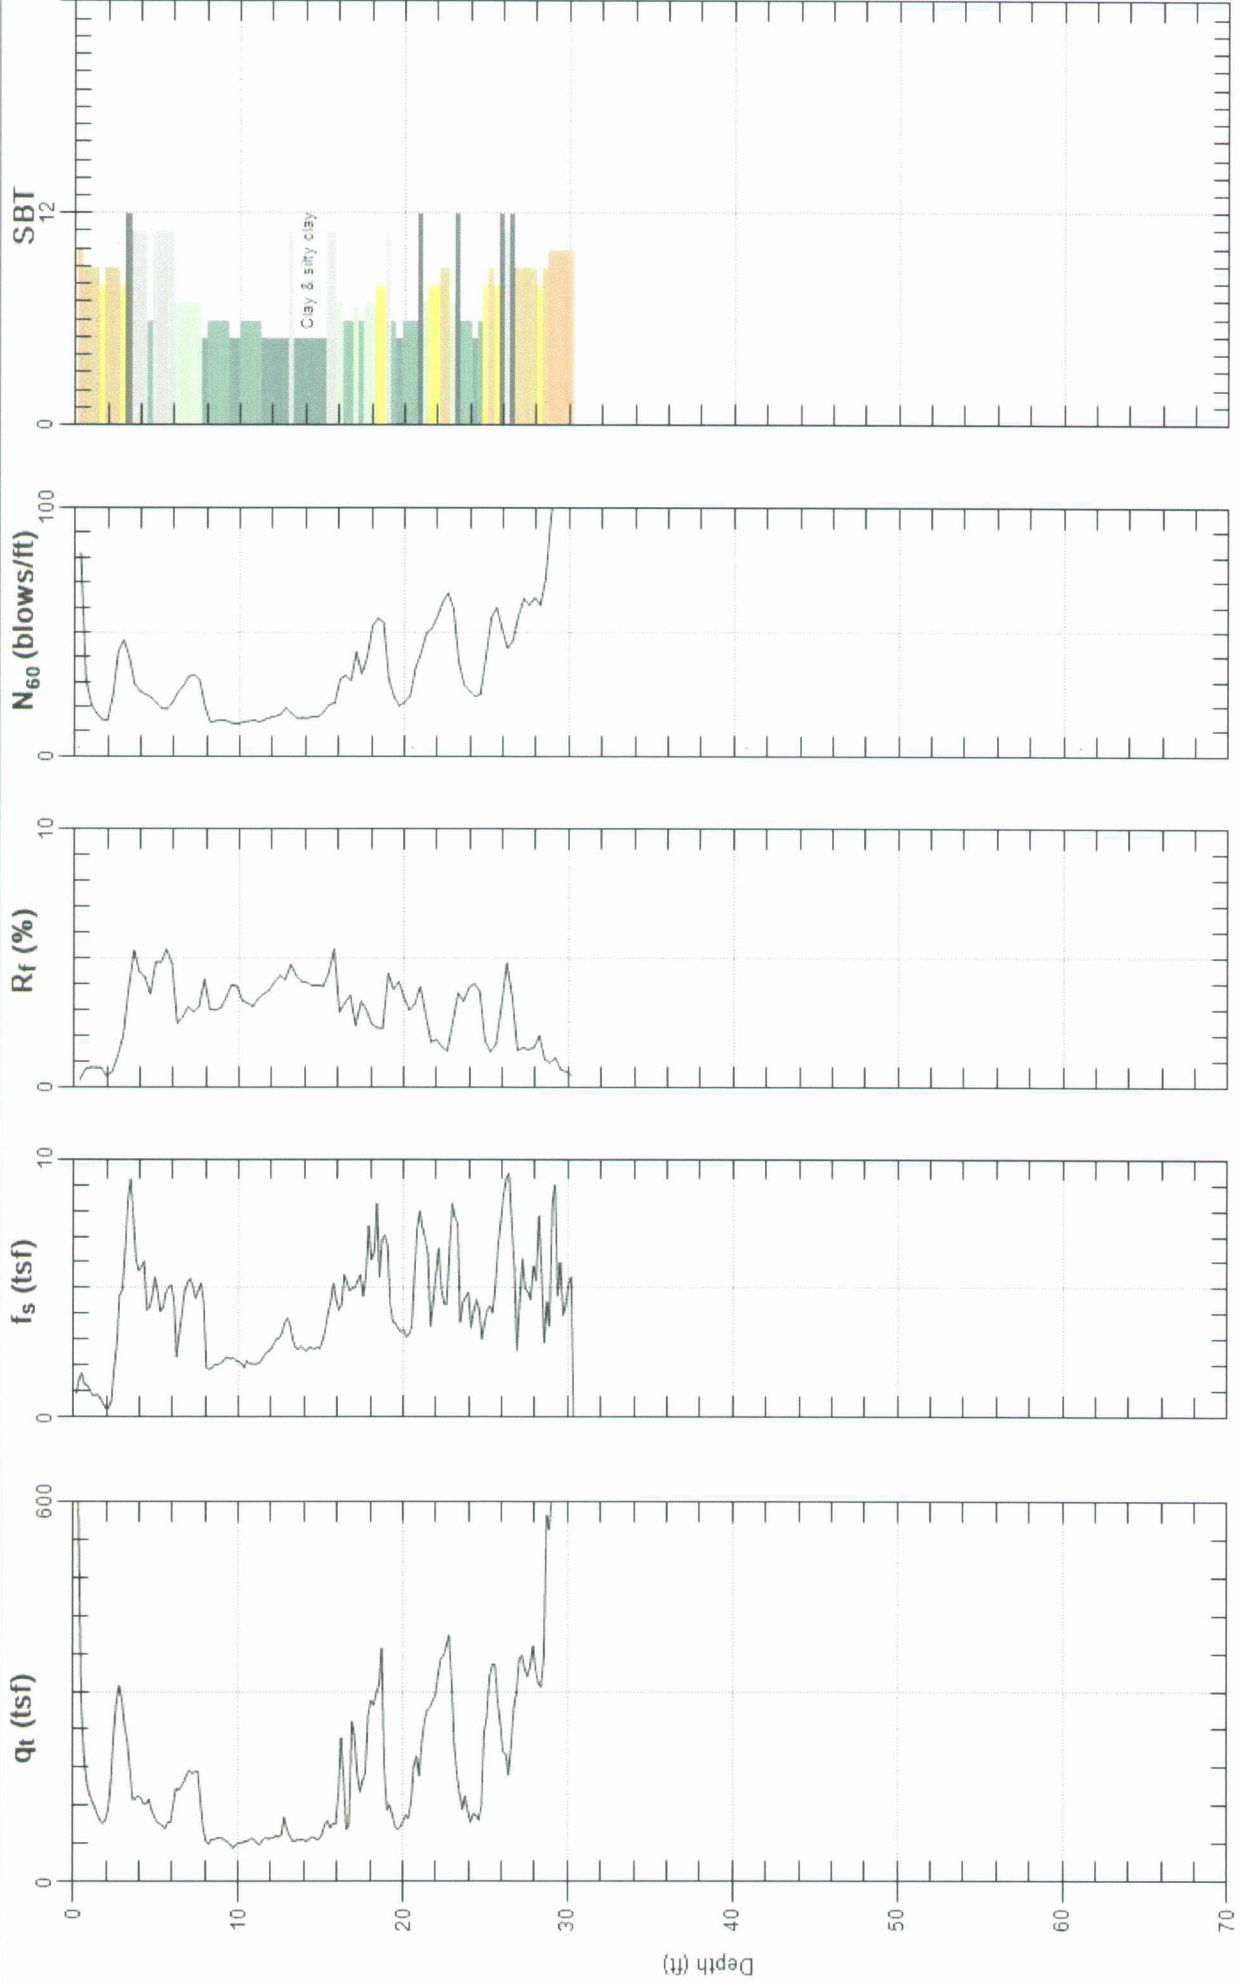

Max. Depth: 30.512 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 12




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-6A

Date: 1/21/2014 12:05

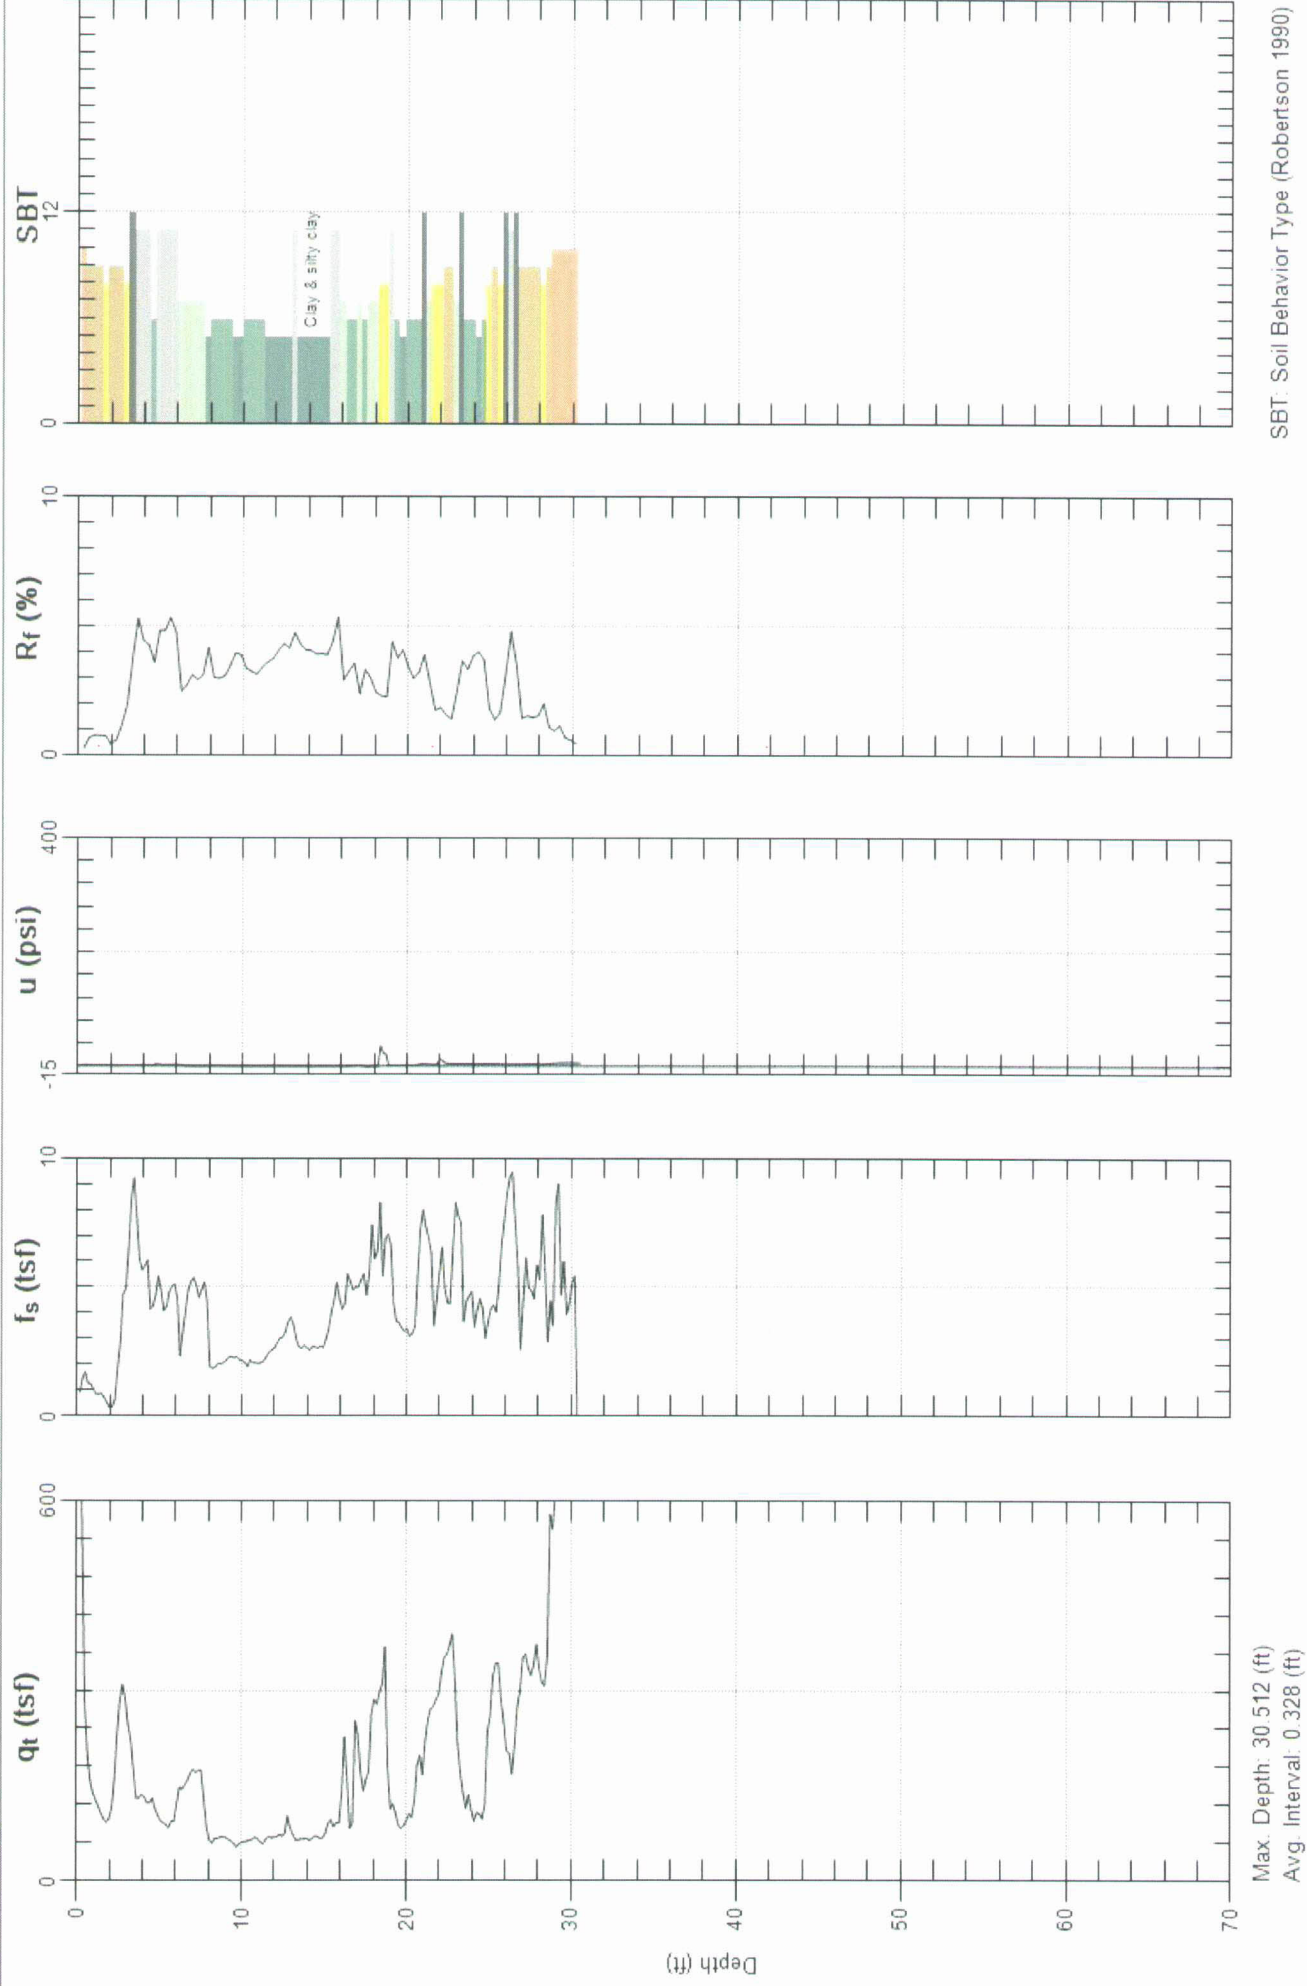

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 13




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-6

Date: 1/21/2014 11:32

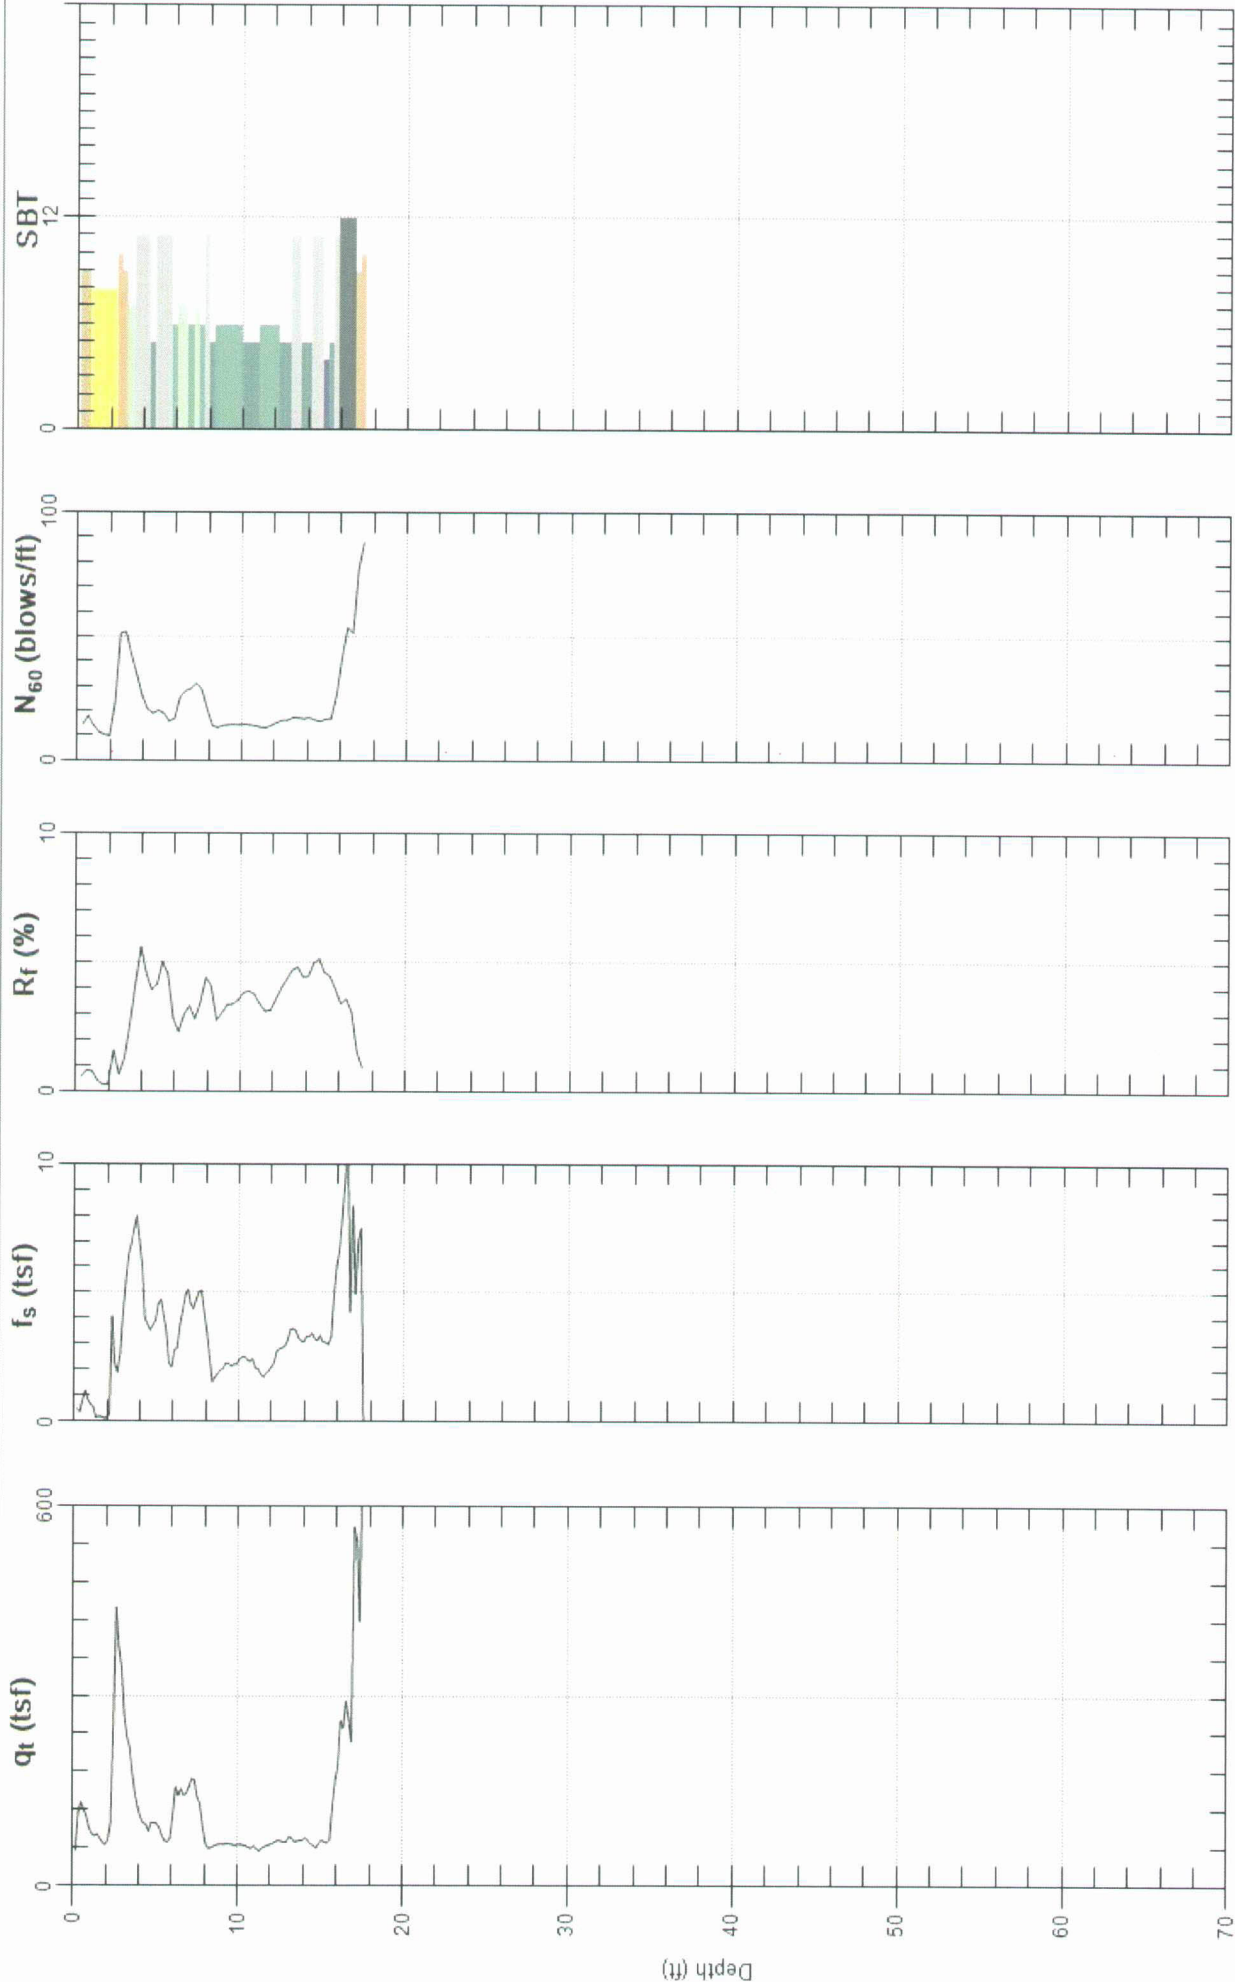

Max. Depth: 17.717 (ft)
Avg. Interval: 0.328 (ft)


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 14



Site: YUCCA CHAMPION
Sounding: CPT-6

Engineer: S.KOLTHOFF
Date: 1/21/2014 11:32

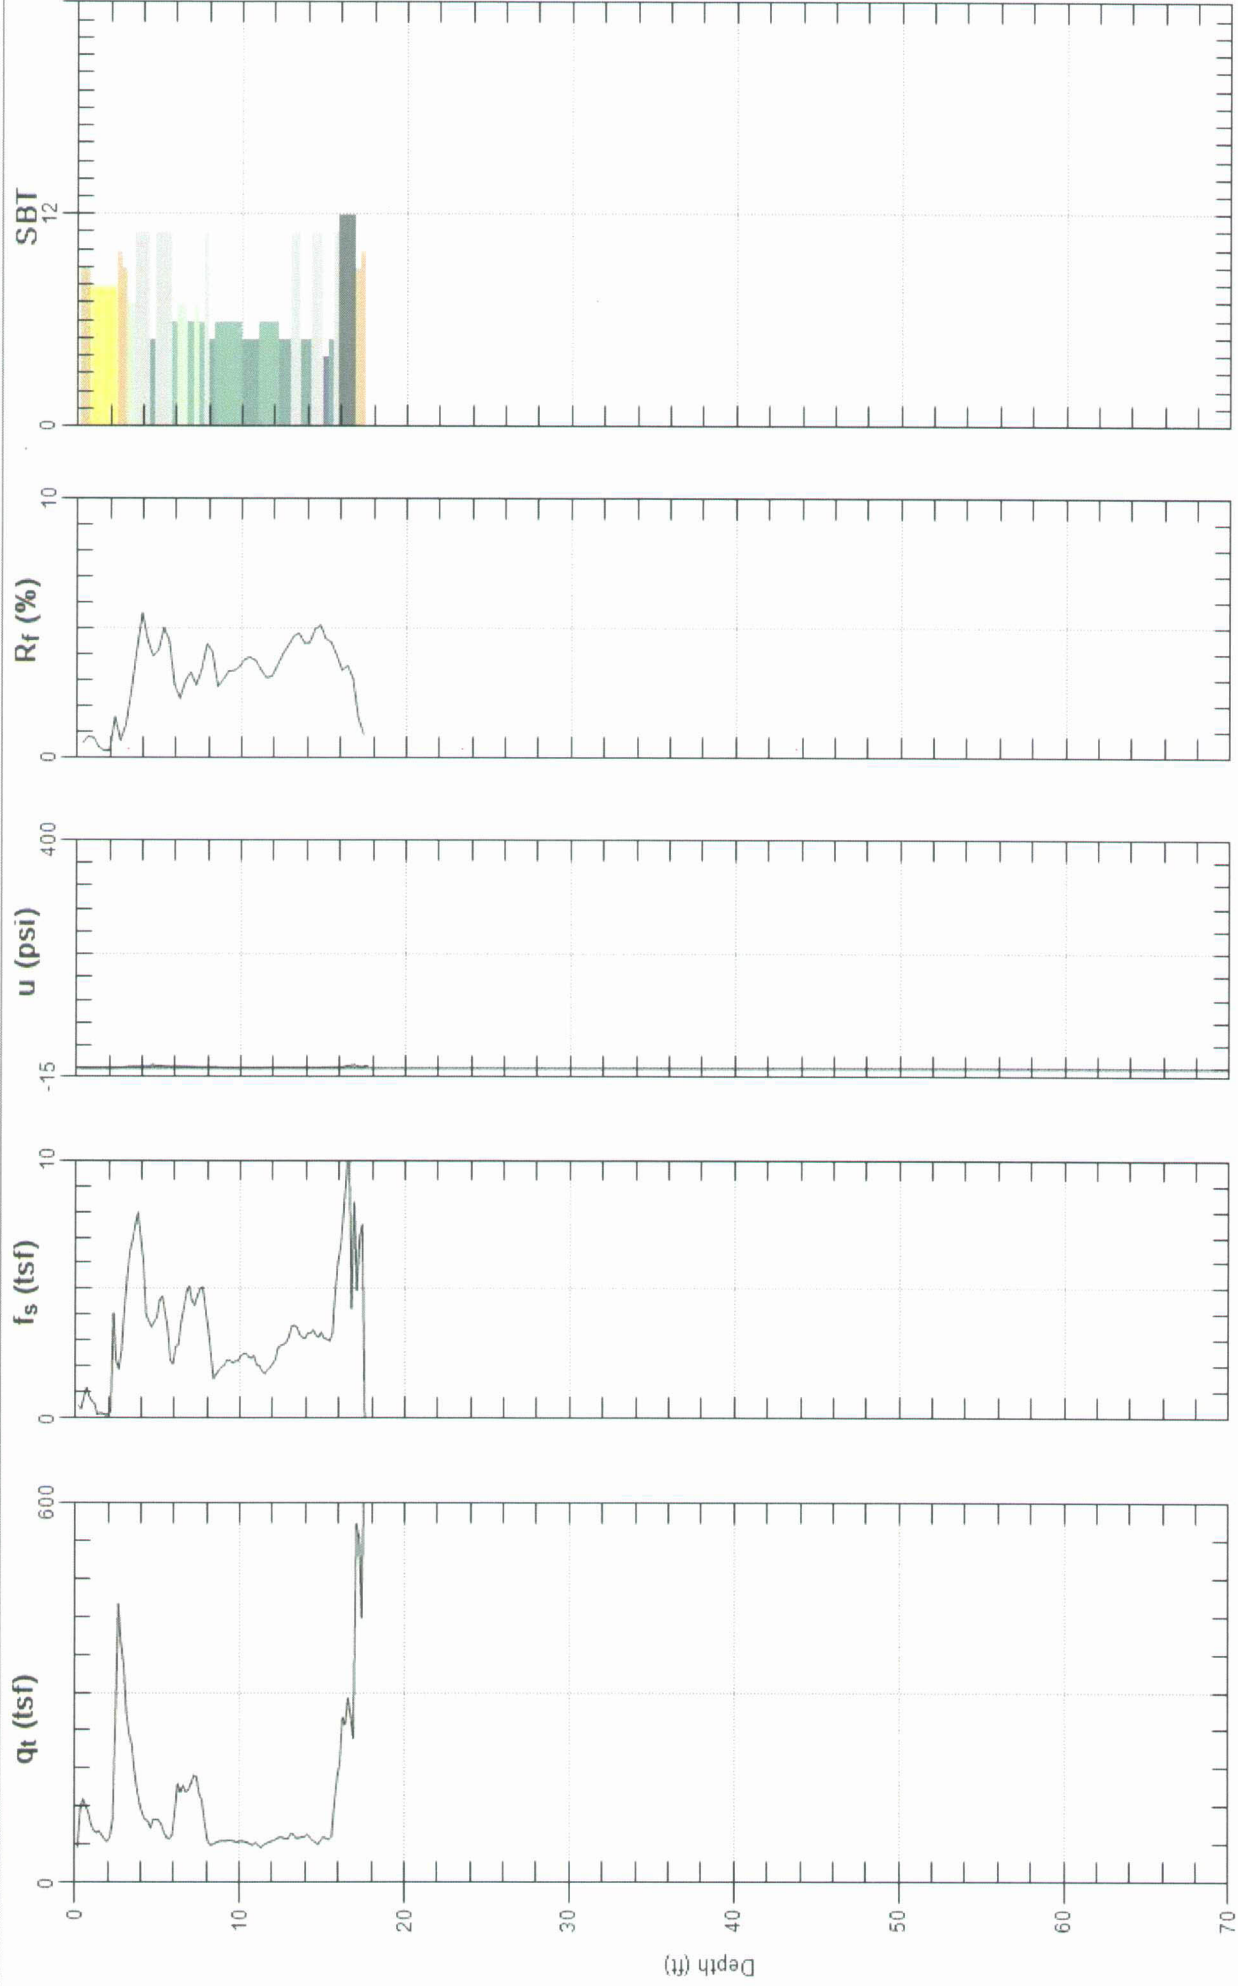

Max. Depth: 17.717 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 15




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-7

Date: 1/21/2014 12:34

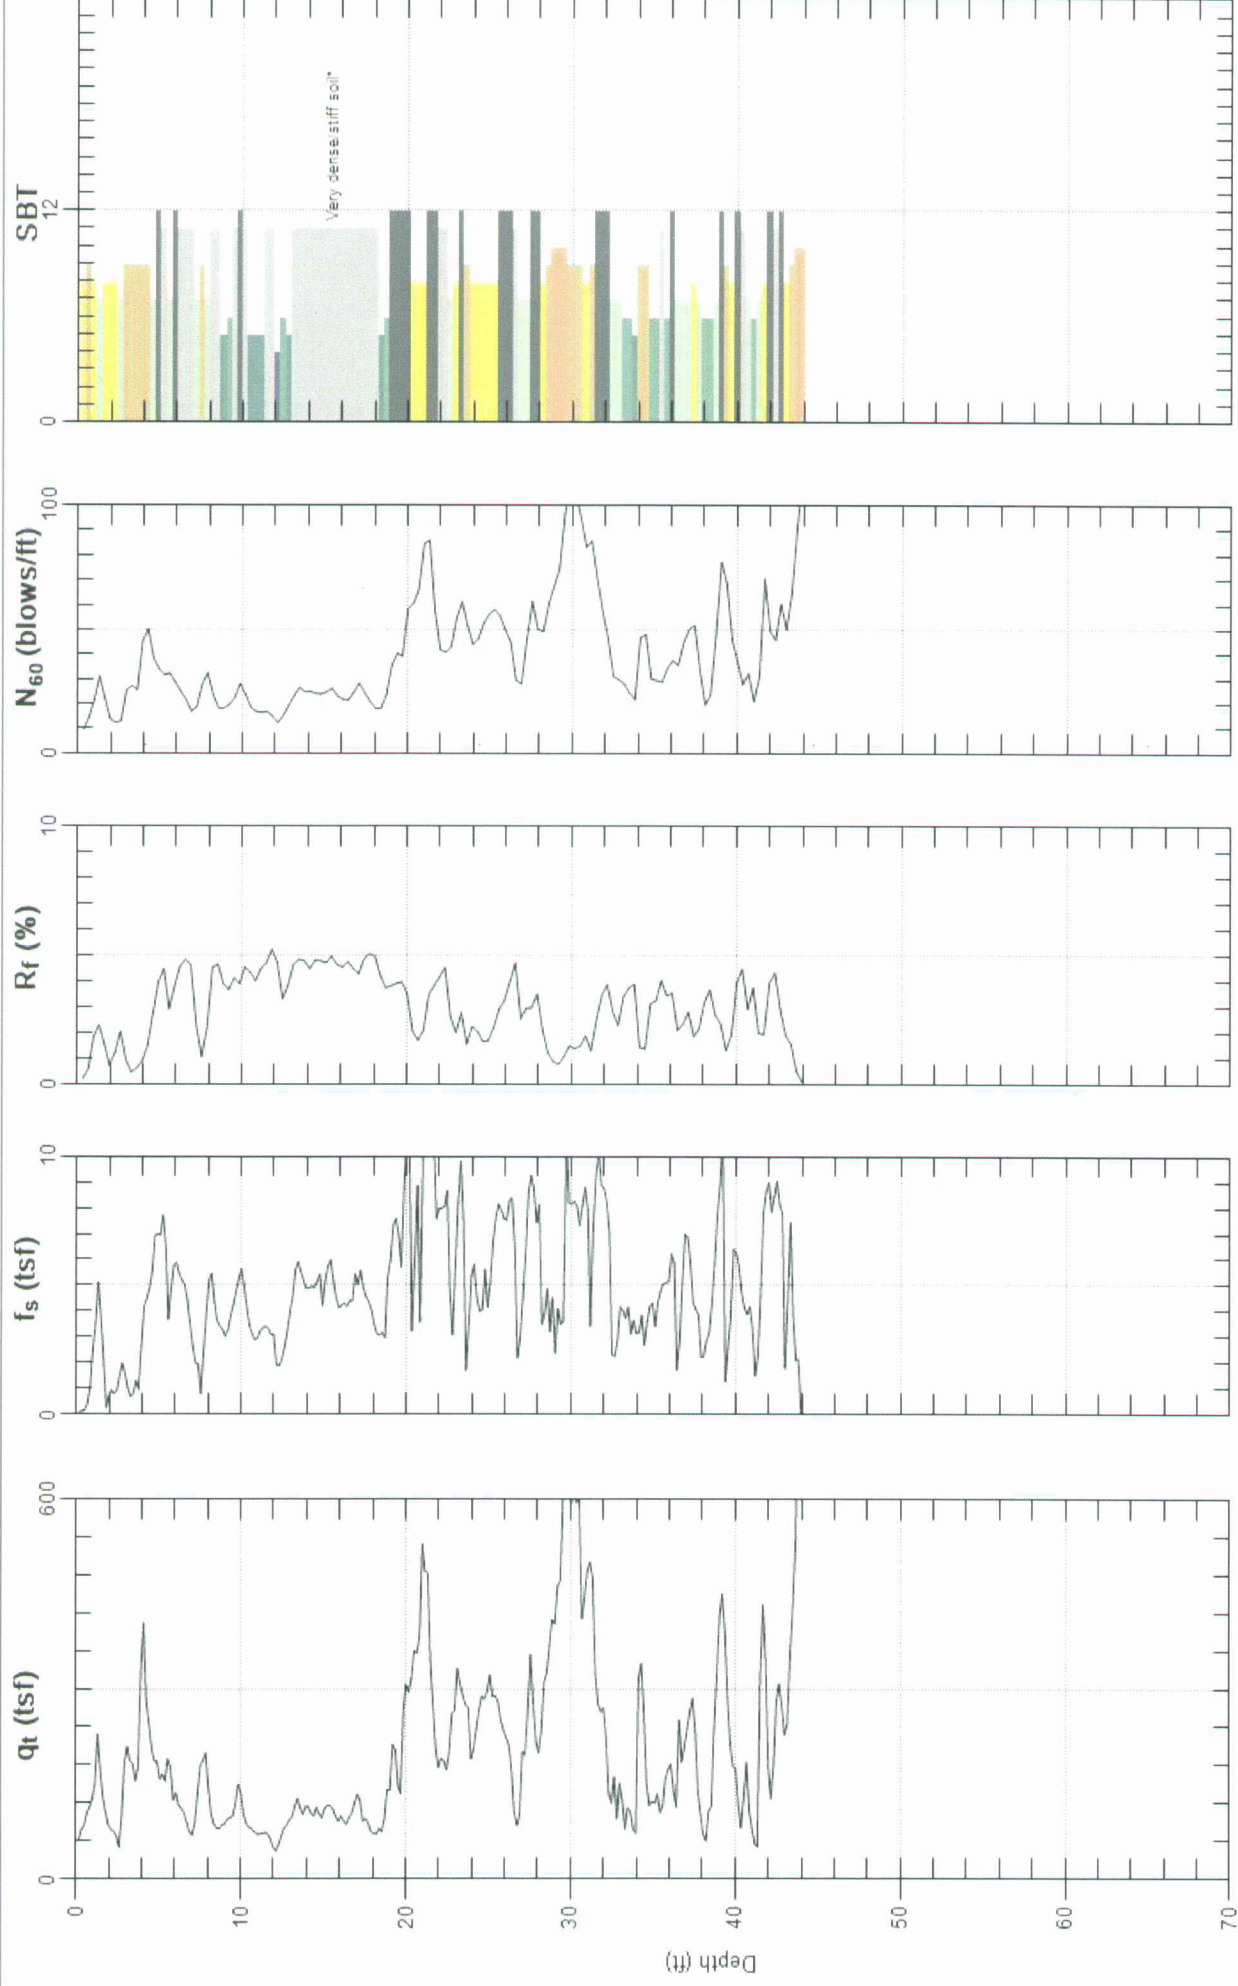

Max. Depth: 44.127 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 16




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-7

Date: 1/21/2014 12:34

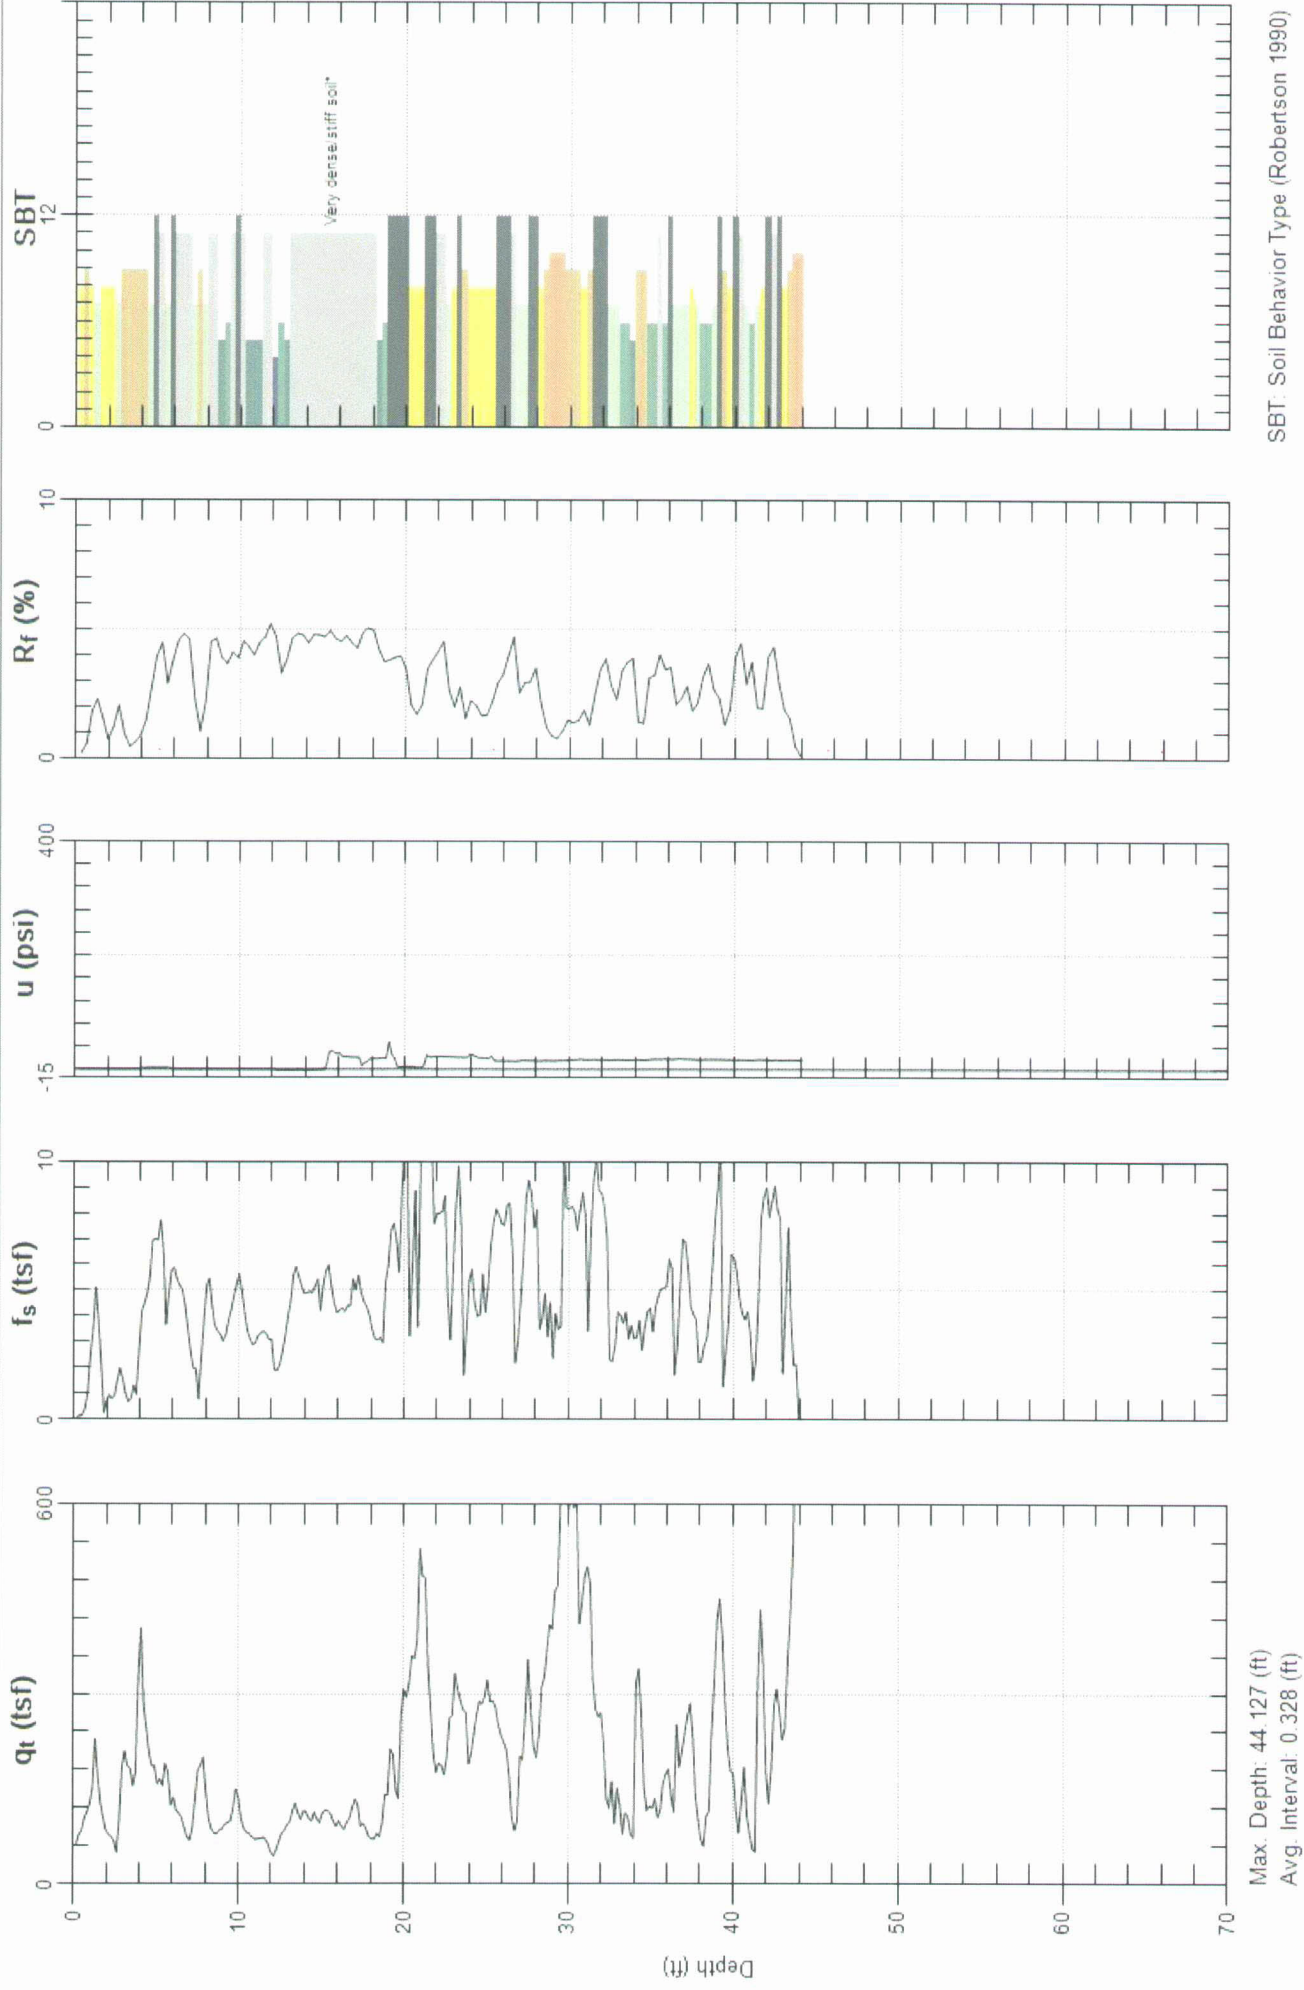


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 17



Site: YUCCA CHAMPION
Sounding: CPT-8
Engineer: S.KOLTHOFF
Date: 1/21/2014 01:10

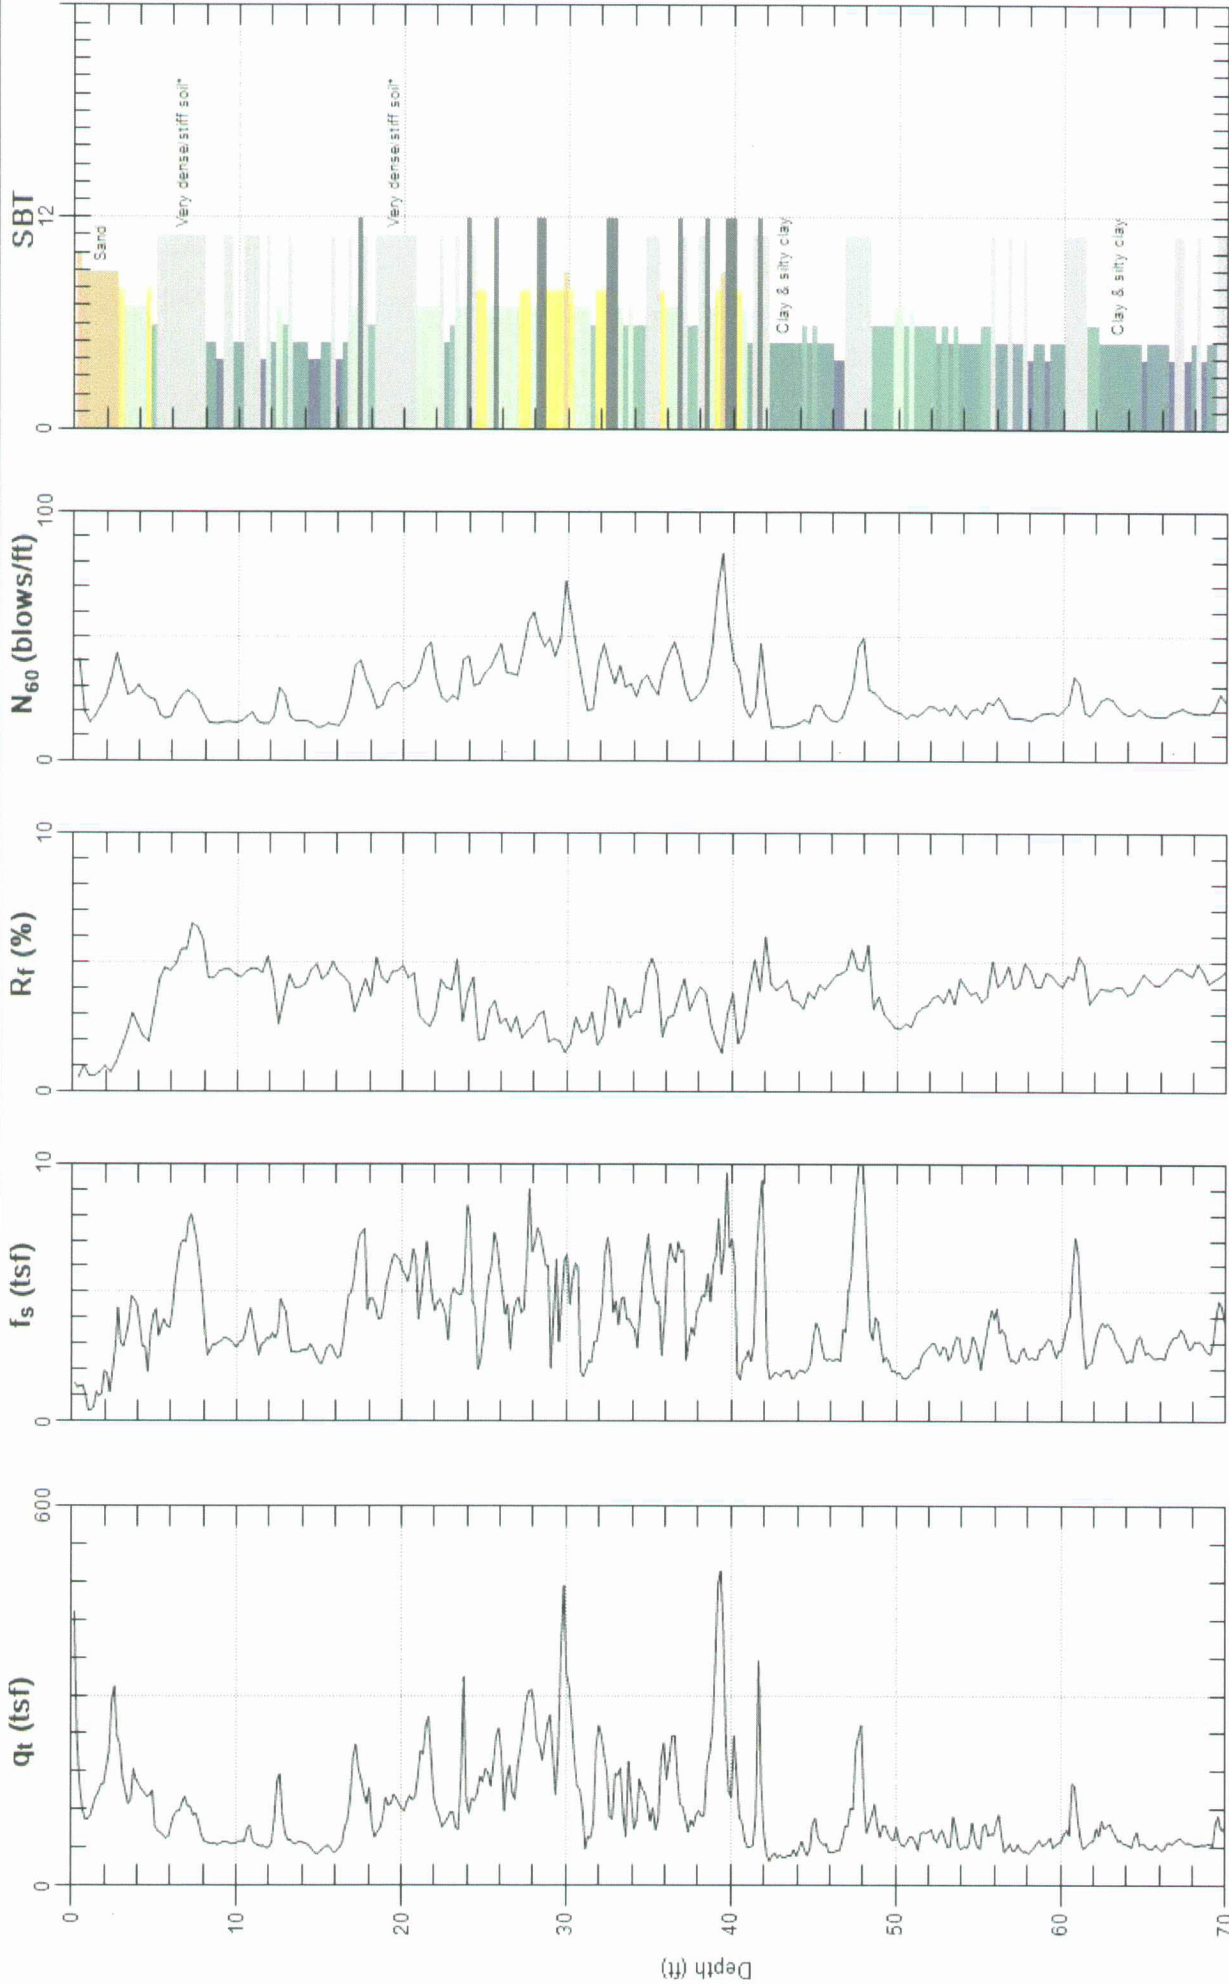

Max. Depth: 70.866 (ft)
Avg. Interval: 0.328 (ft)


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 18



Site: YUCCA CHAMPION
Sounding: CPT-8

Engineer: S.KOLTHOFF
Date: 1/21/2014 01:10

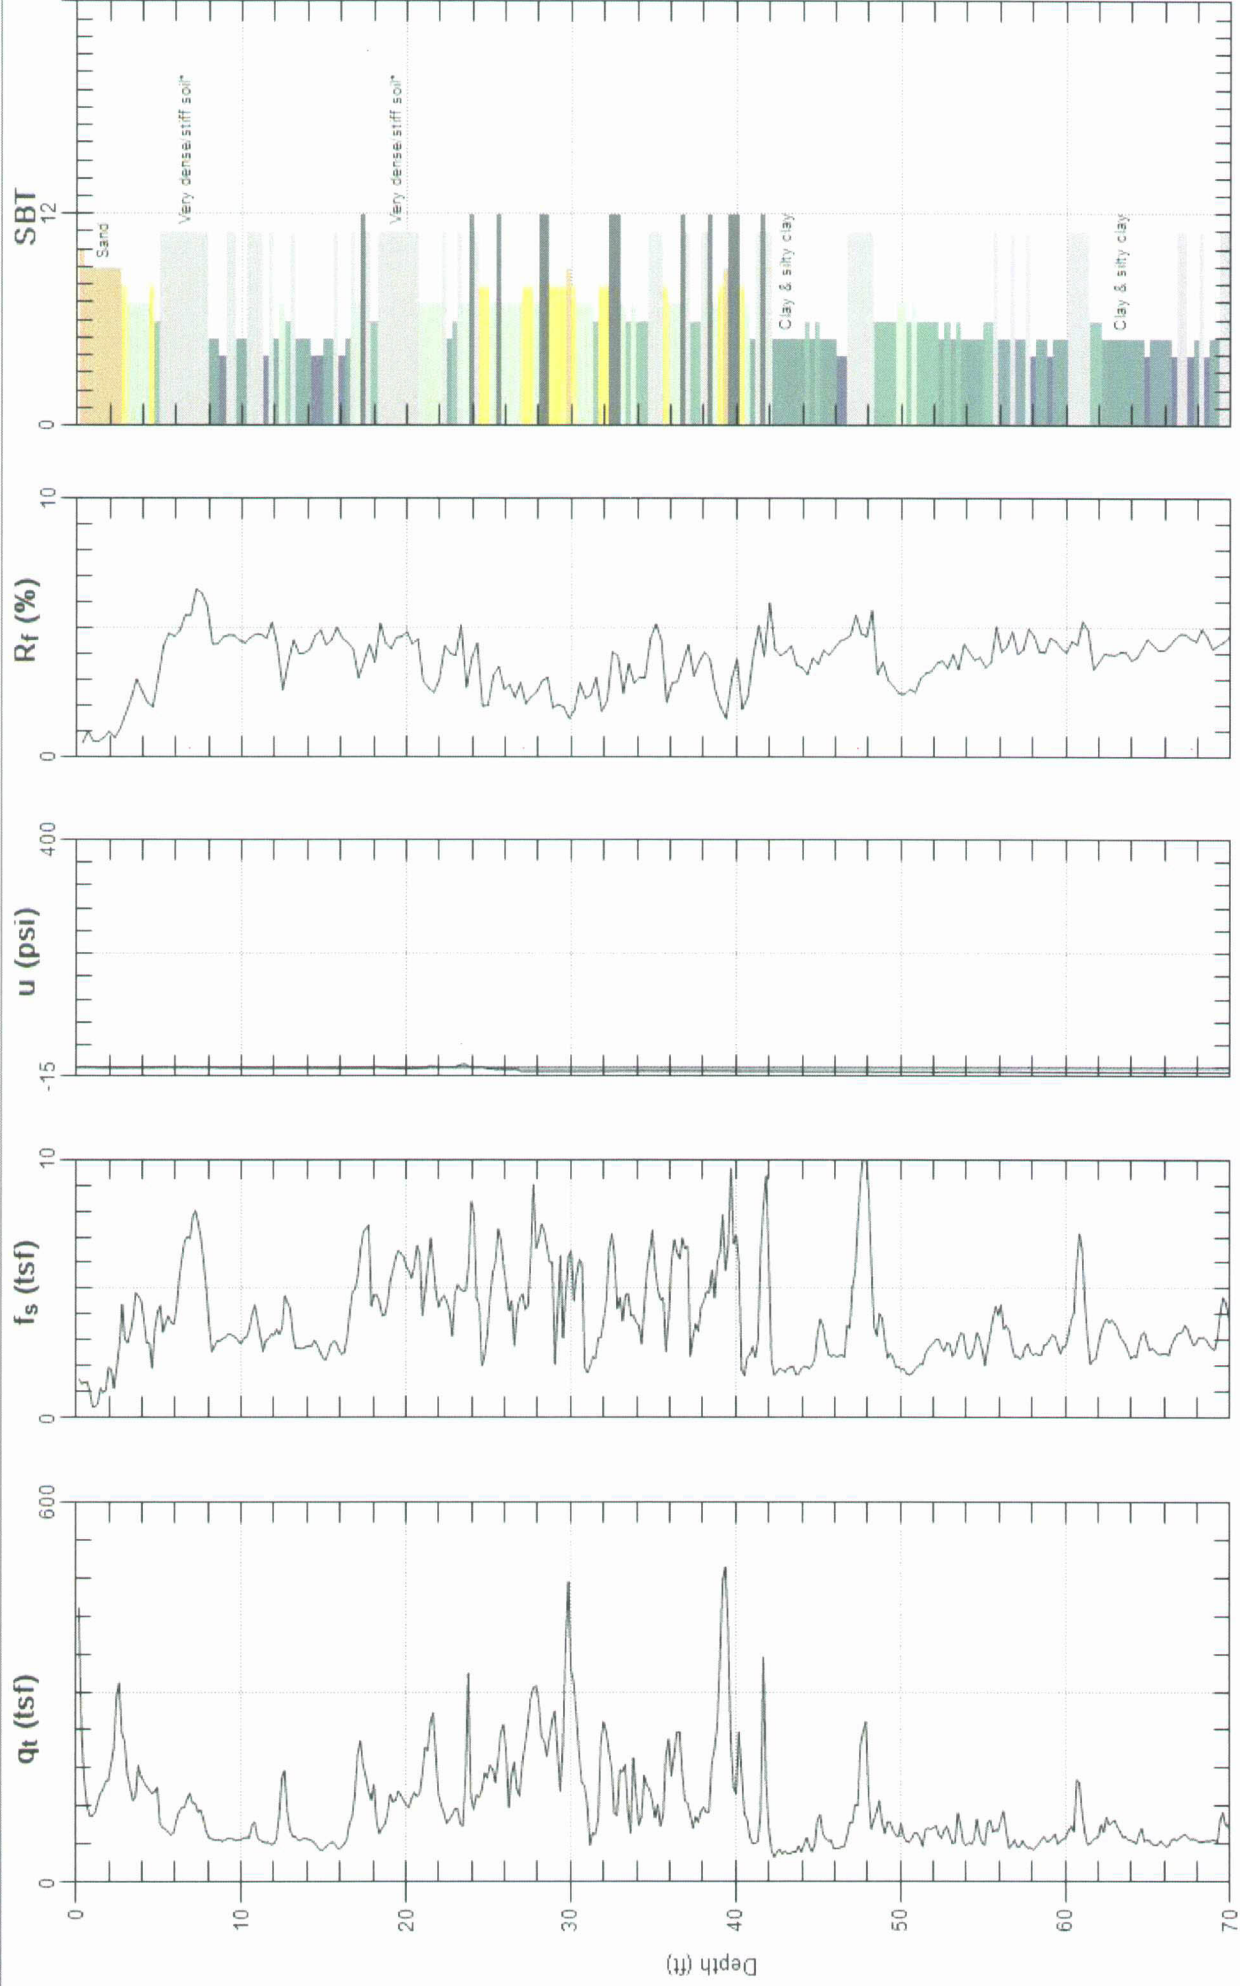


Max. Depth: 70.866 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 19



Engineer: S.KOLTHOFF
Date: 1/22/2014 02:38
Site: YUCCA CHAMPION
Sounding: CPT-9

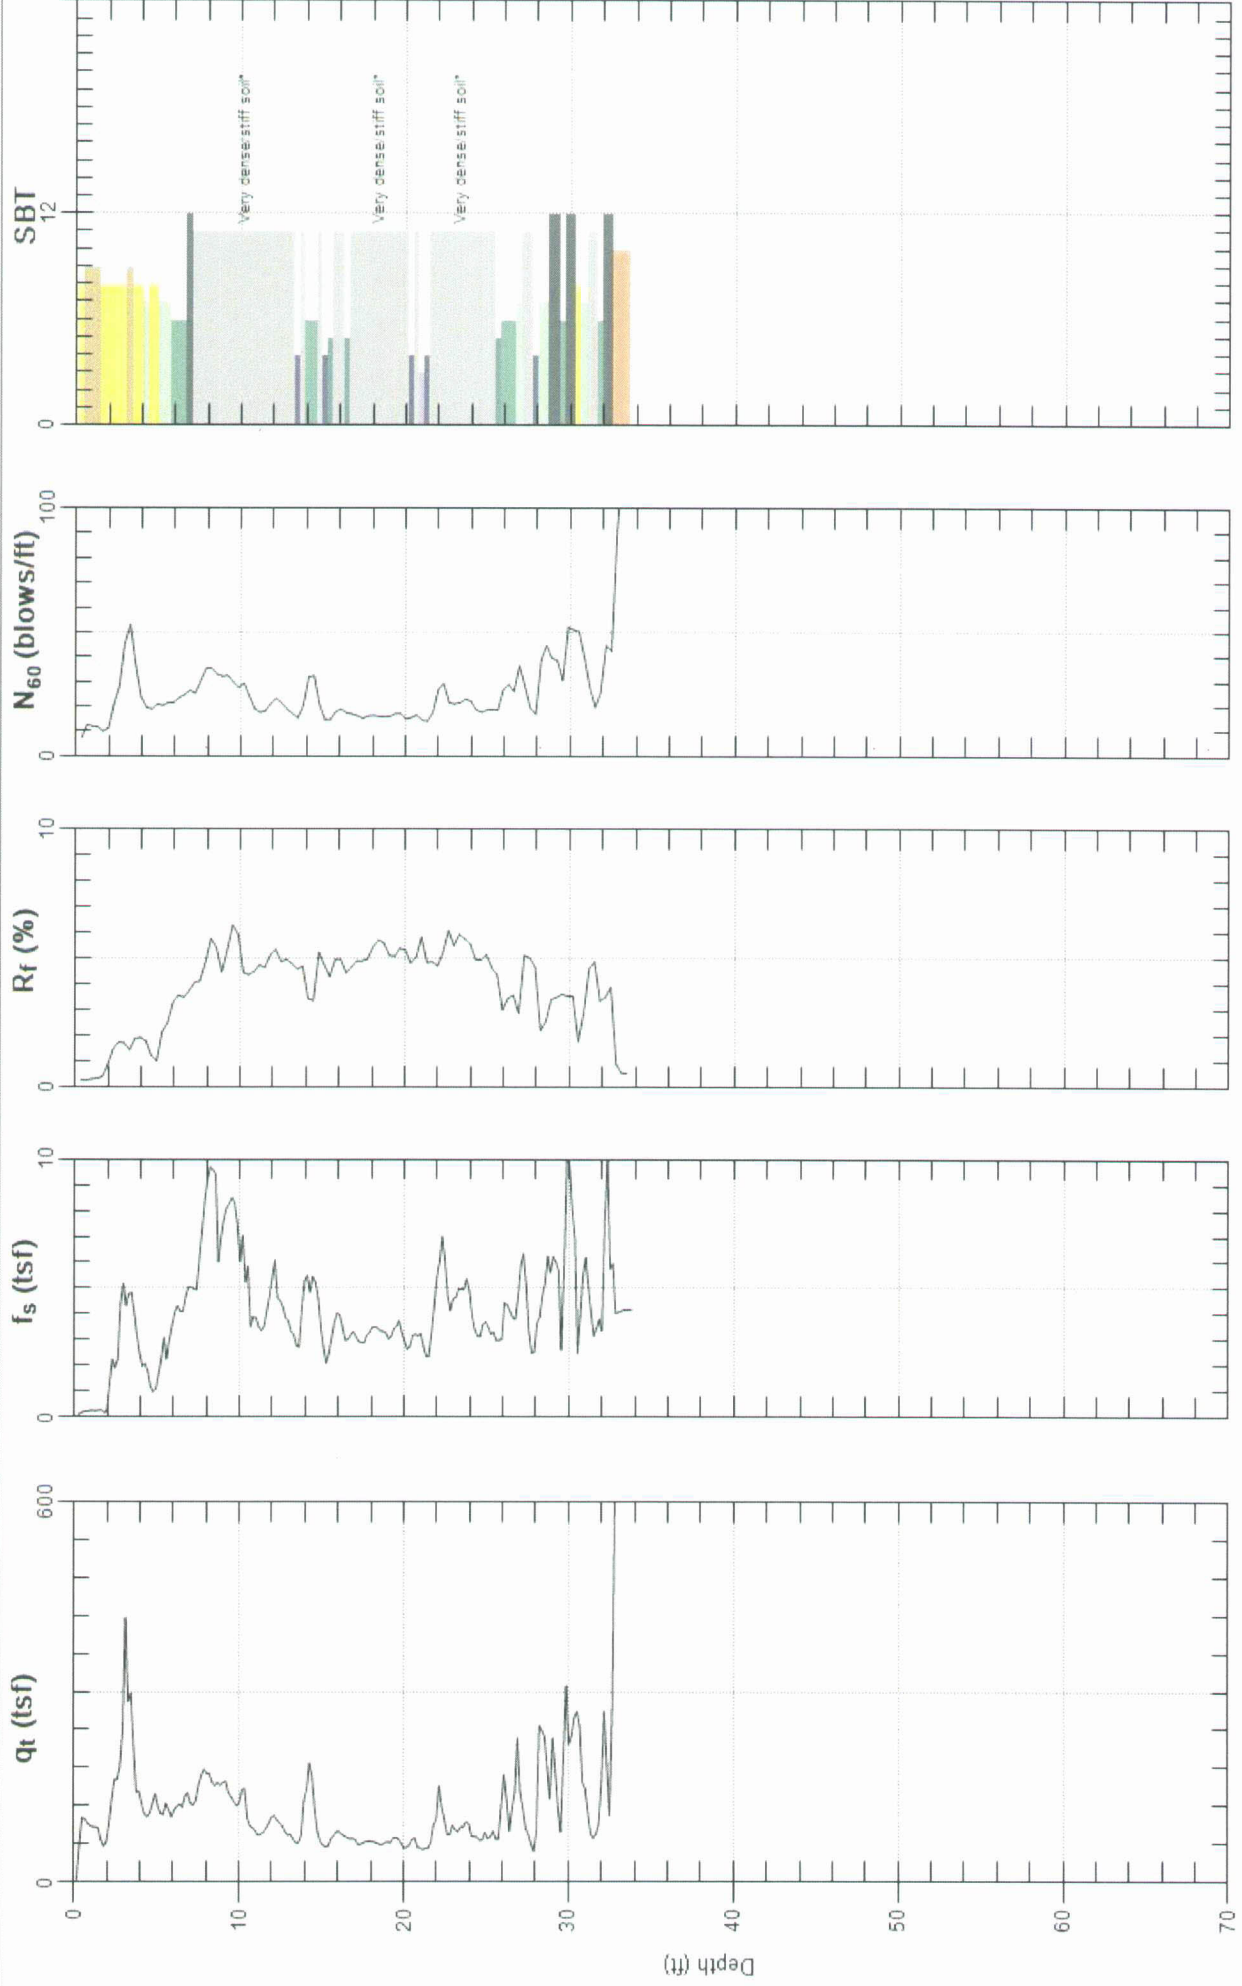

Max. Depth: 33.793 (ft)
Avg. Interval: 0.328 (ft)
SBT: Soil Behavior Type (Robertson 1990)

Figure A - 20




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-9

Date: 1/22/2014 02:38

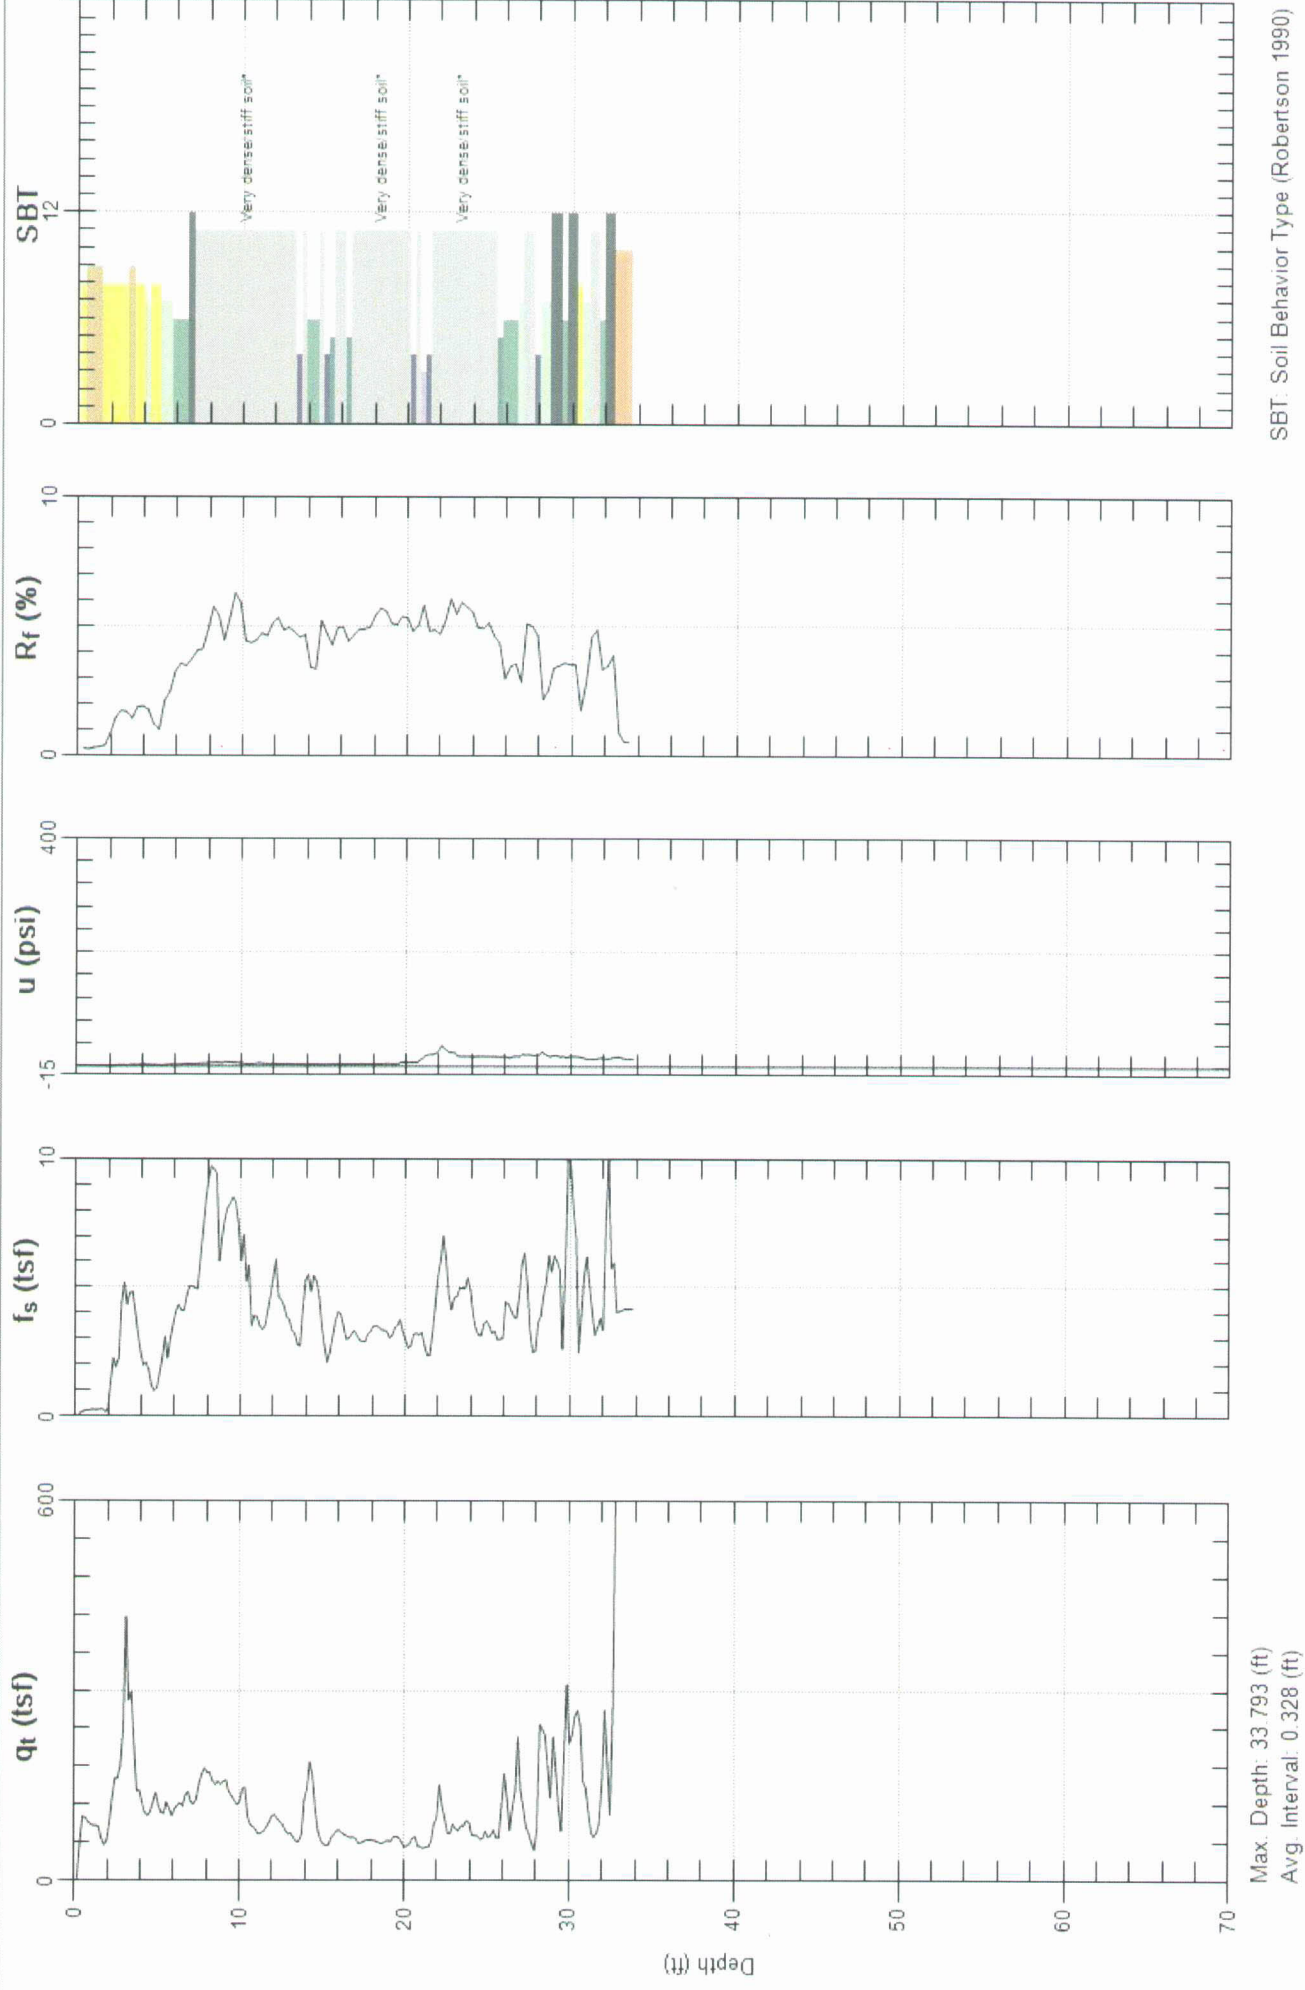


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 21



Site: YUCCA CHAMPION
Sounding: CPT-10

Engineer: S.KOLTHOFF
Date: 1/22/2014 03:25

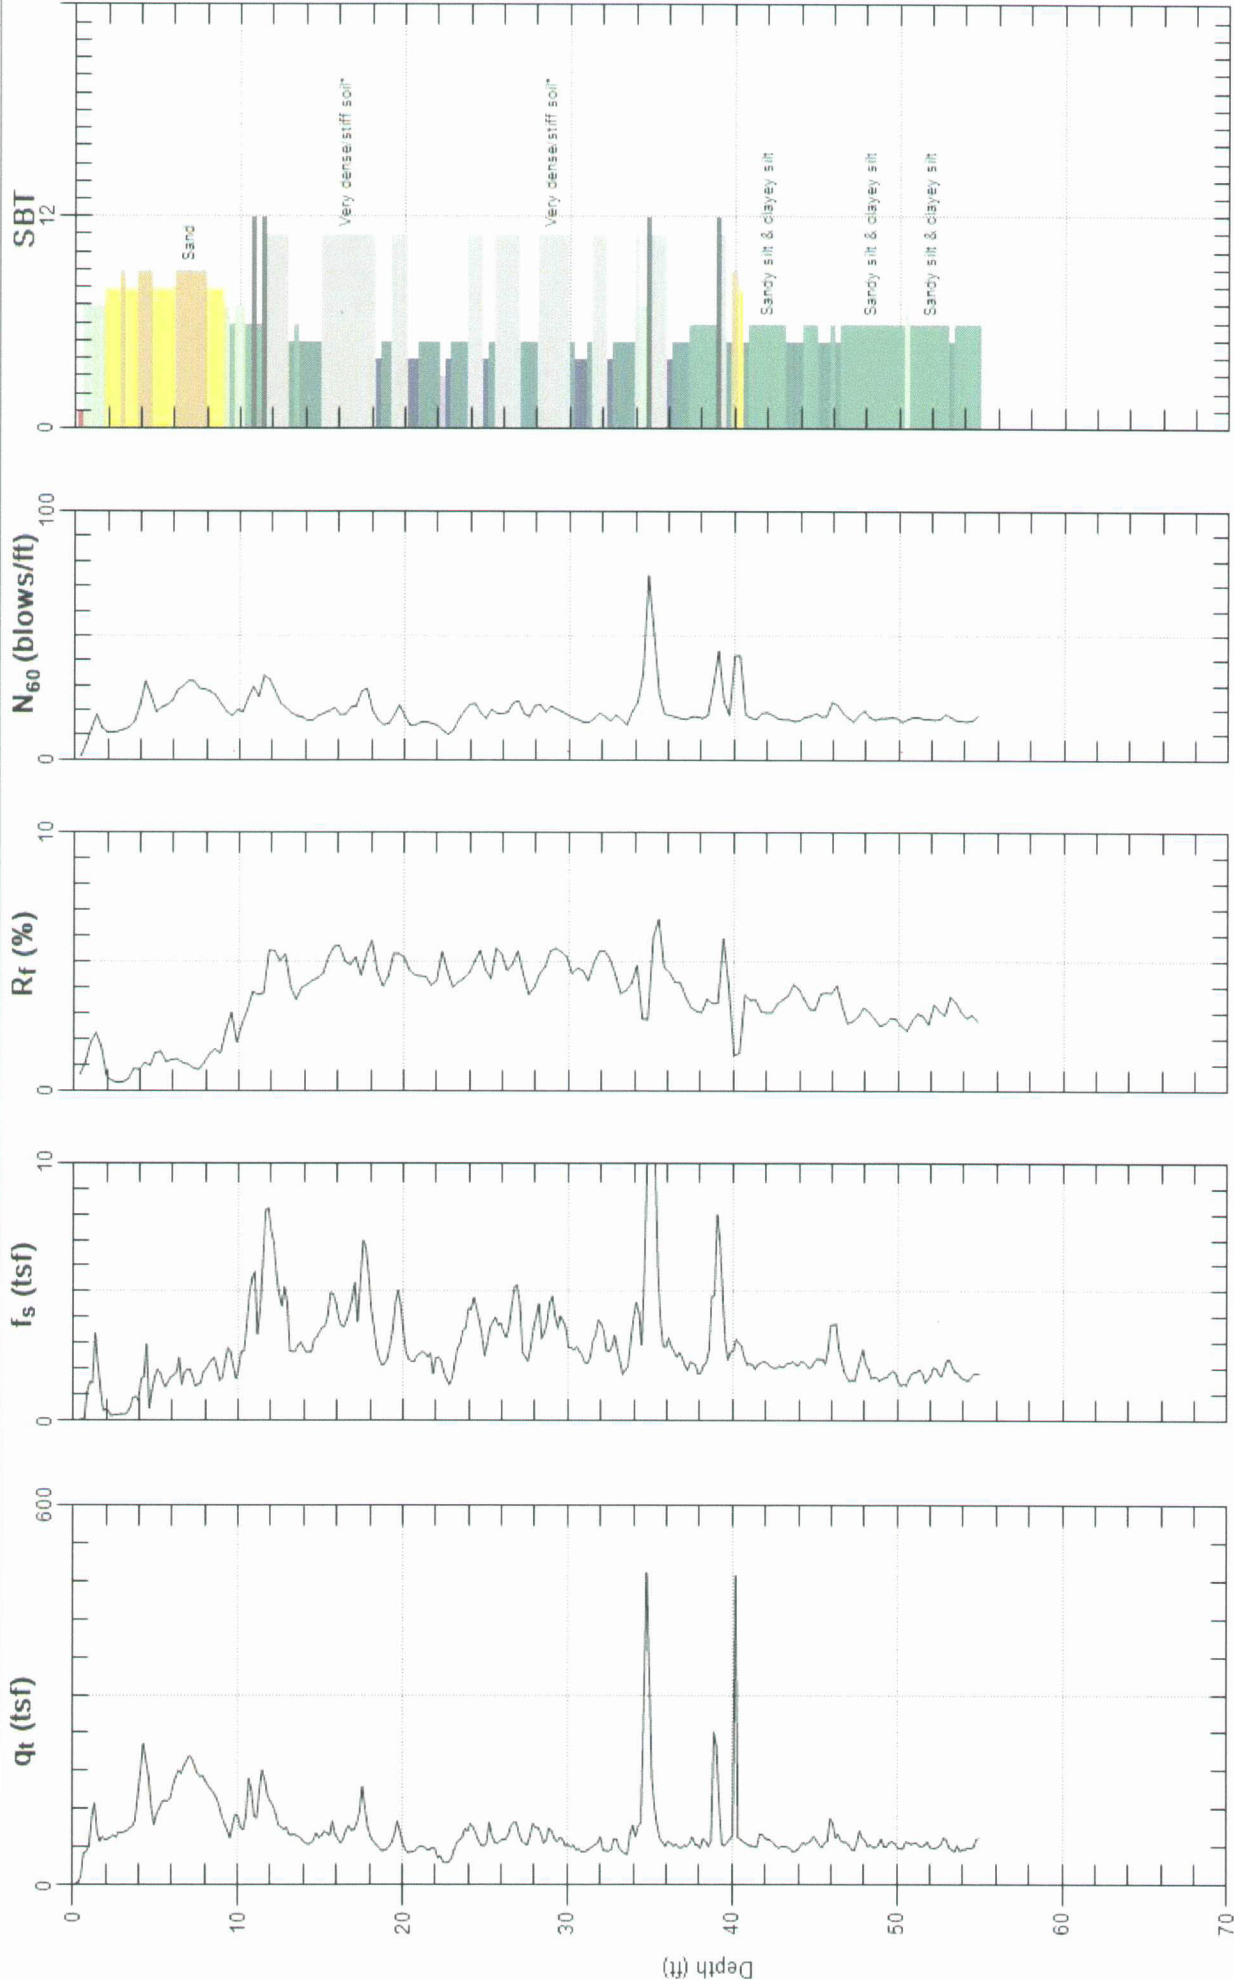

Max. Depth: 54.954 (ft)
Avg. Interval: 0.328 (ft)


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 22



Site: YUCCA CHAMPION
Sounding: CPT-10

Engineer: S.KOLTHOFF
Date: 1/22/2014 03:25

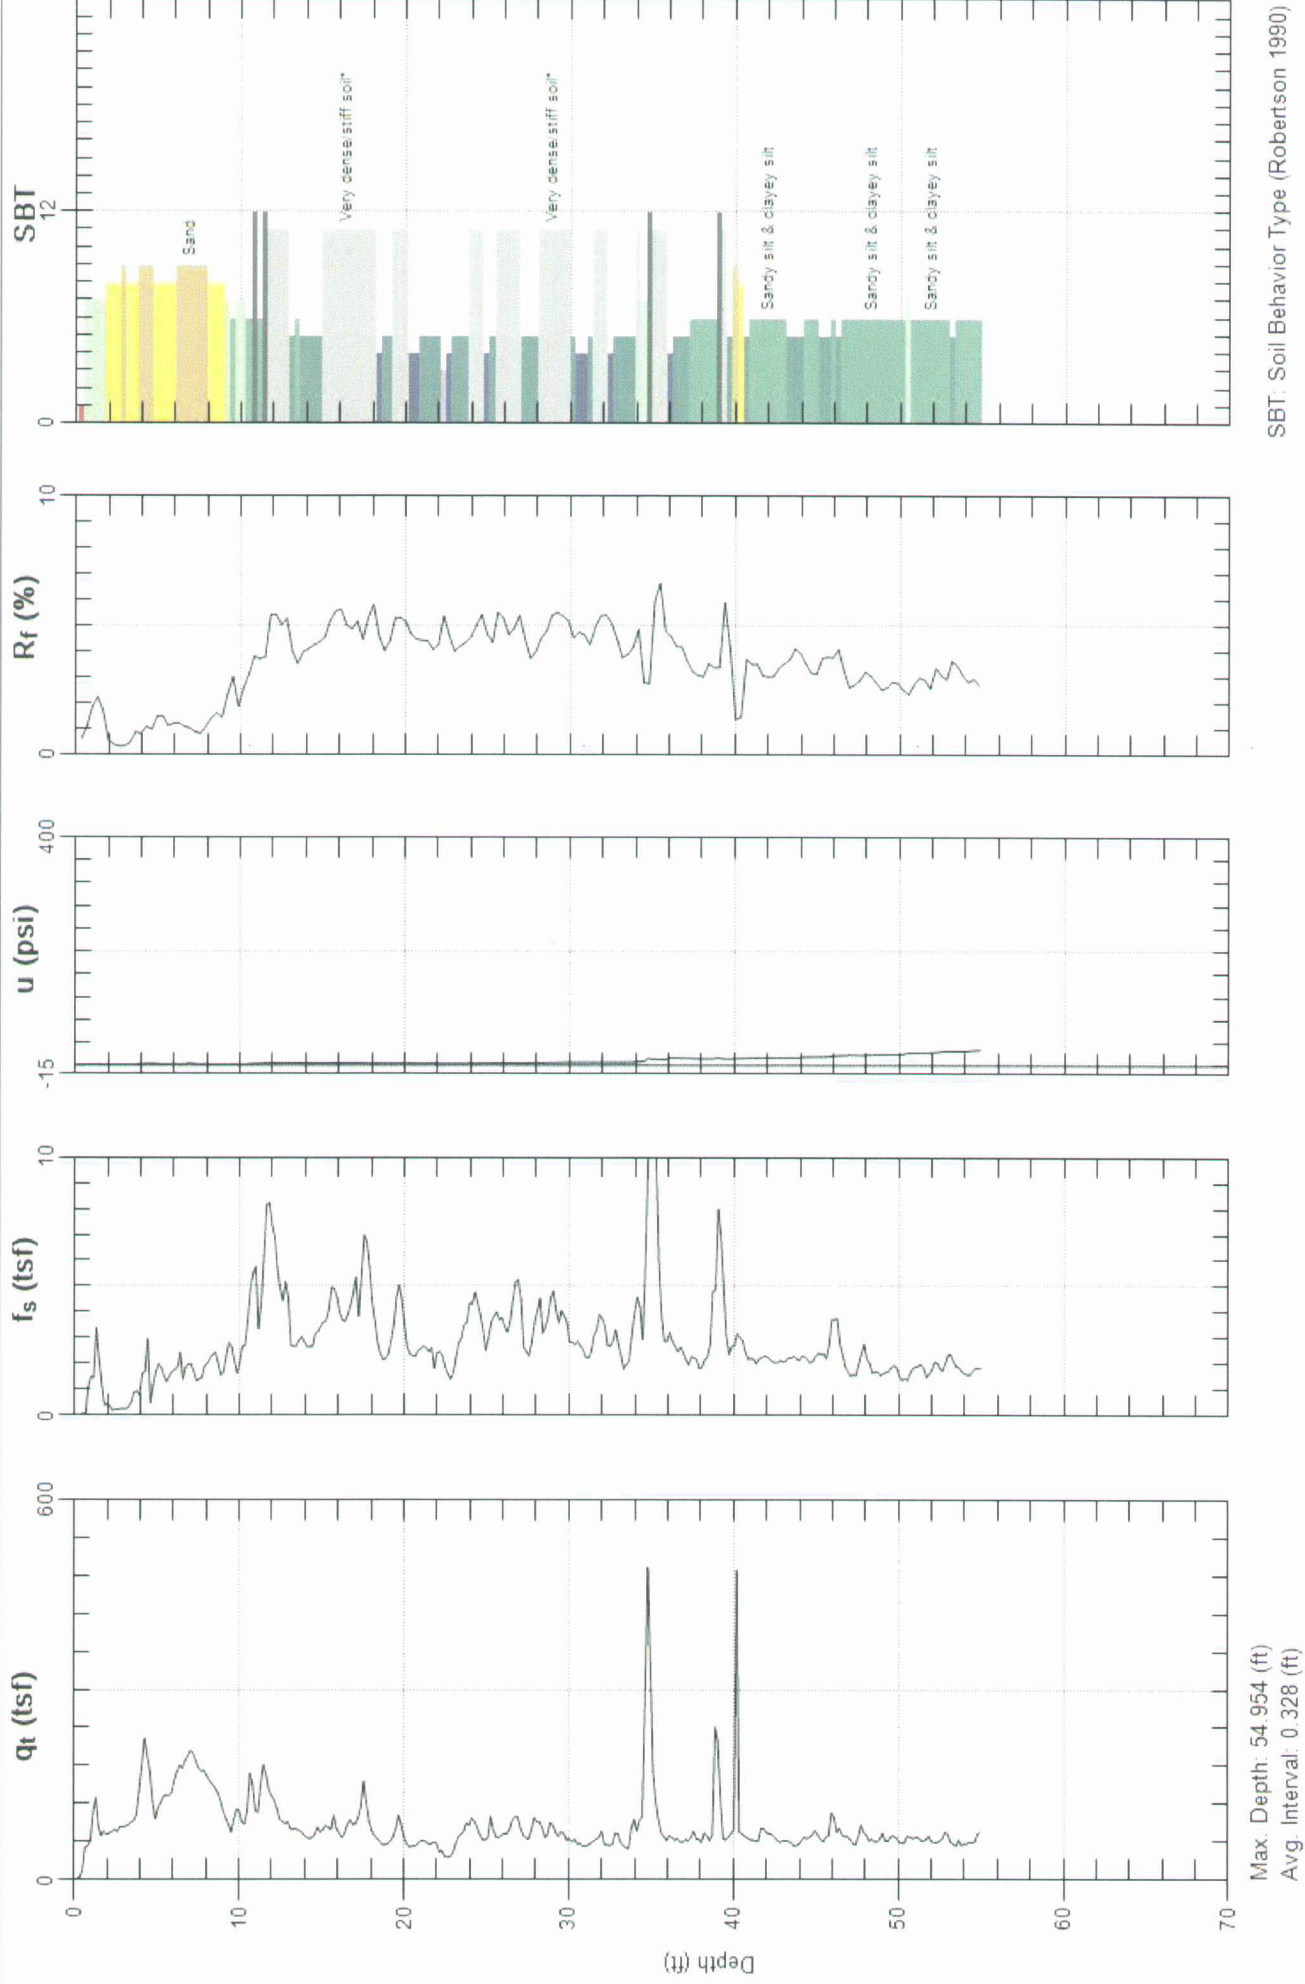

Max. Depth: 54.954 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 23




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-11

Date: 1/22/2014 04:12

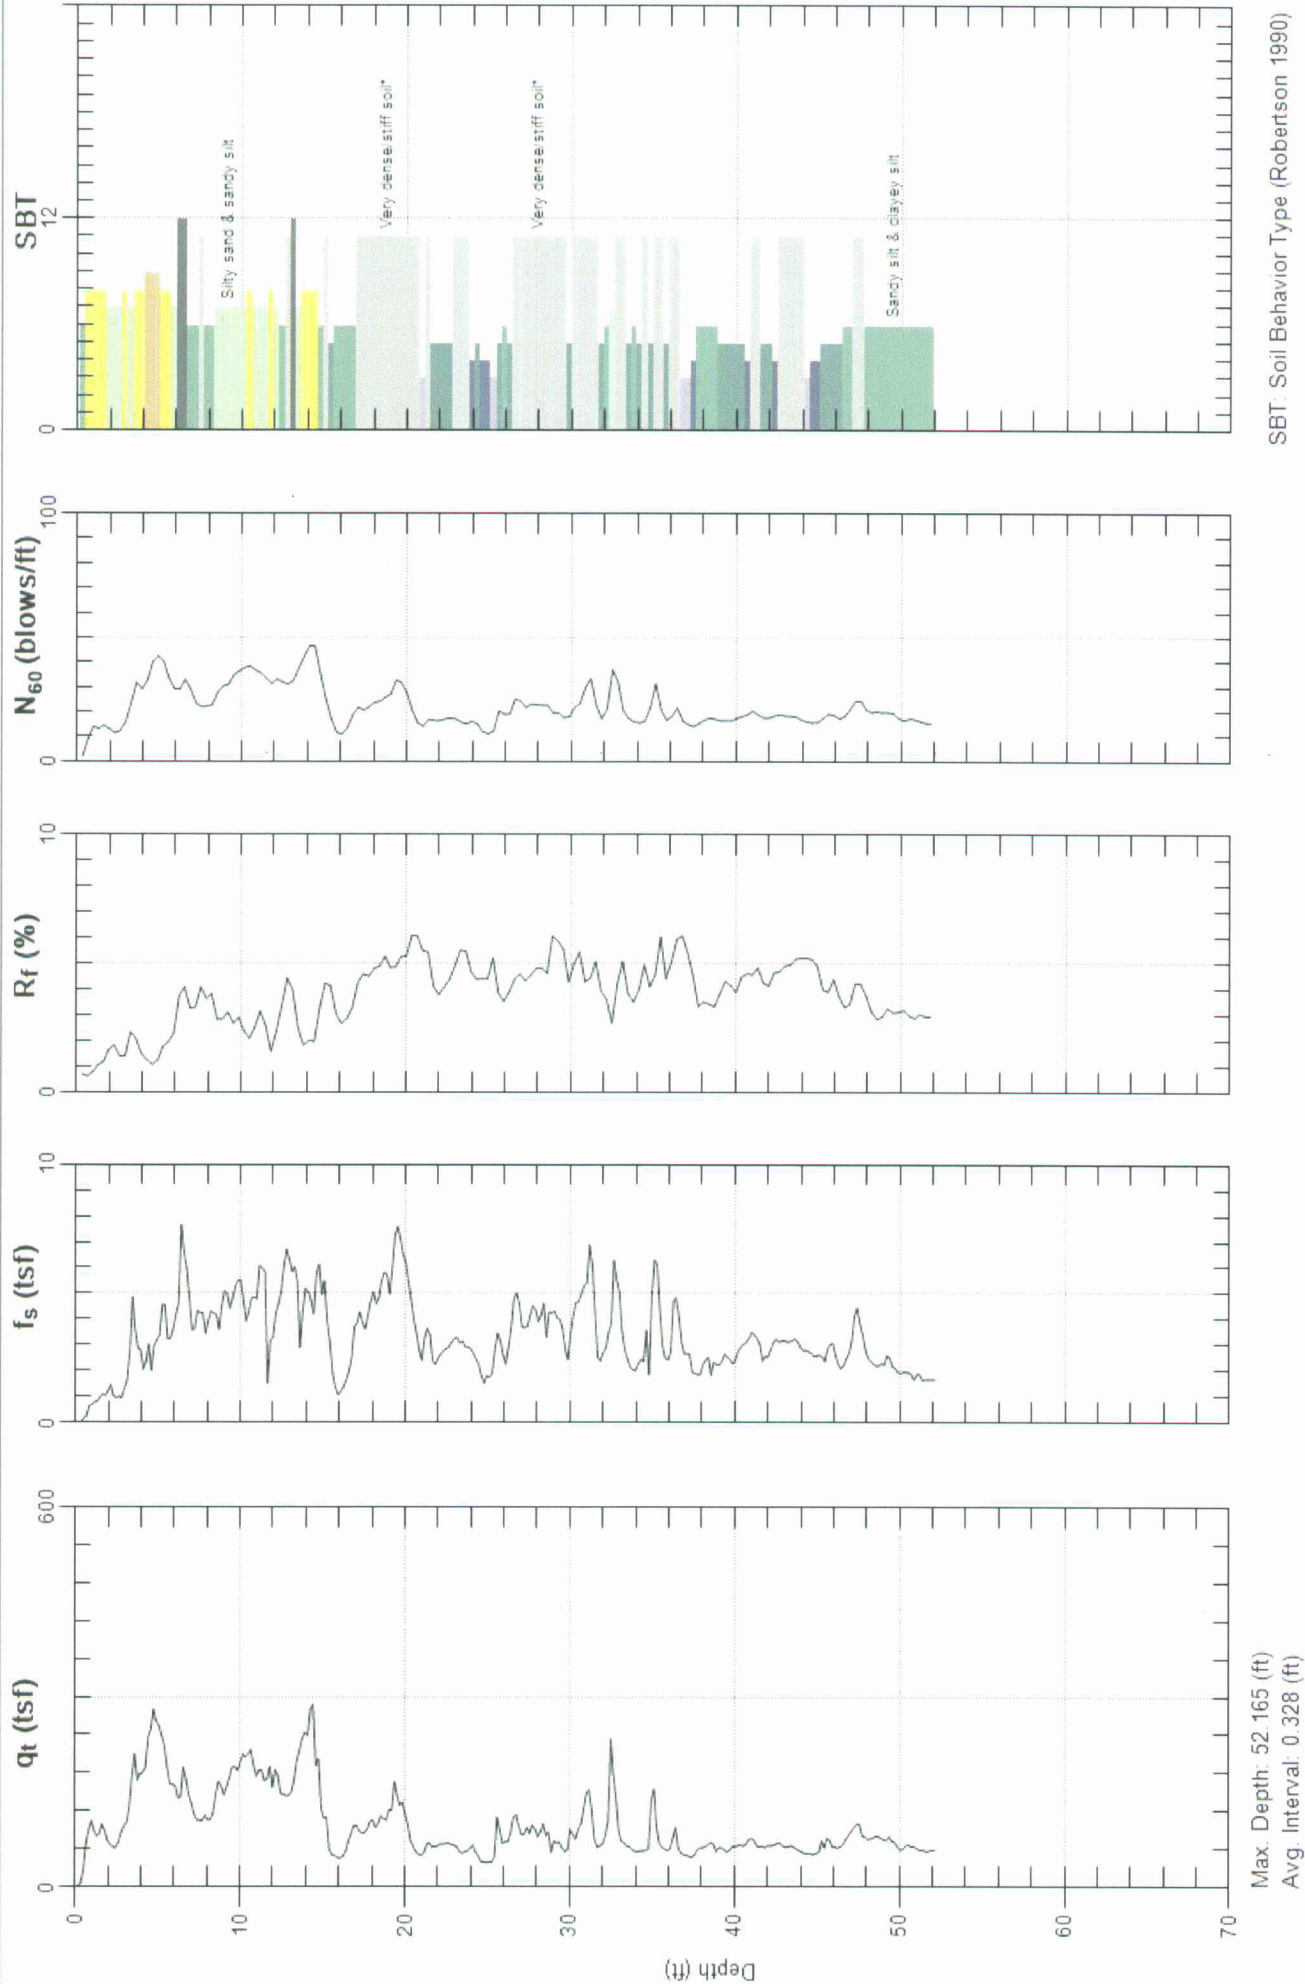

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 24




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-11

Date: 1/22/2014 04:12

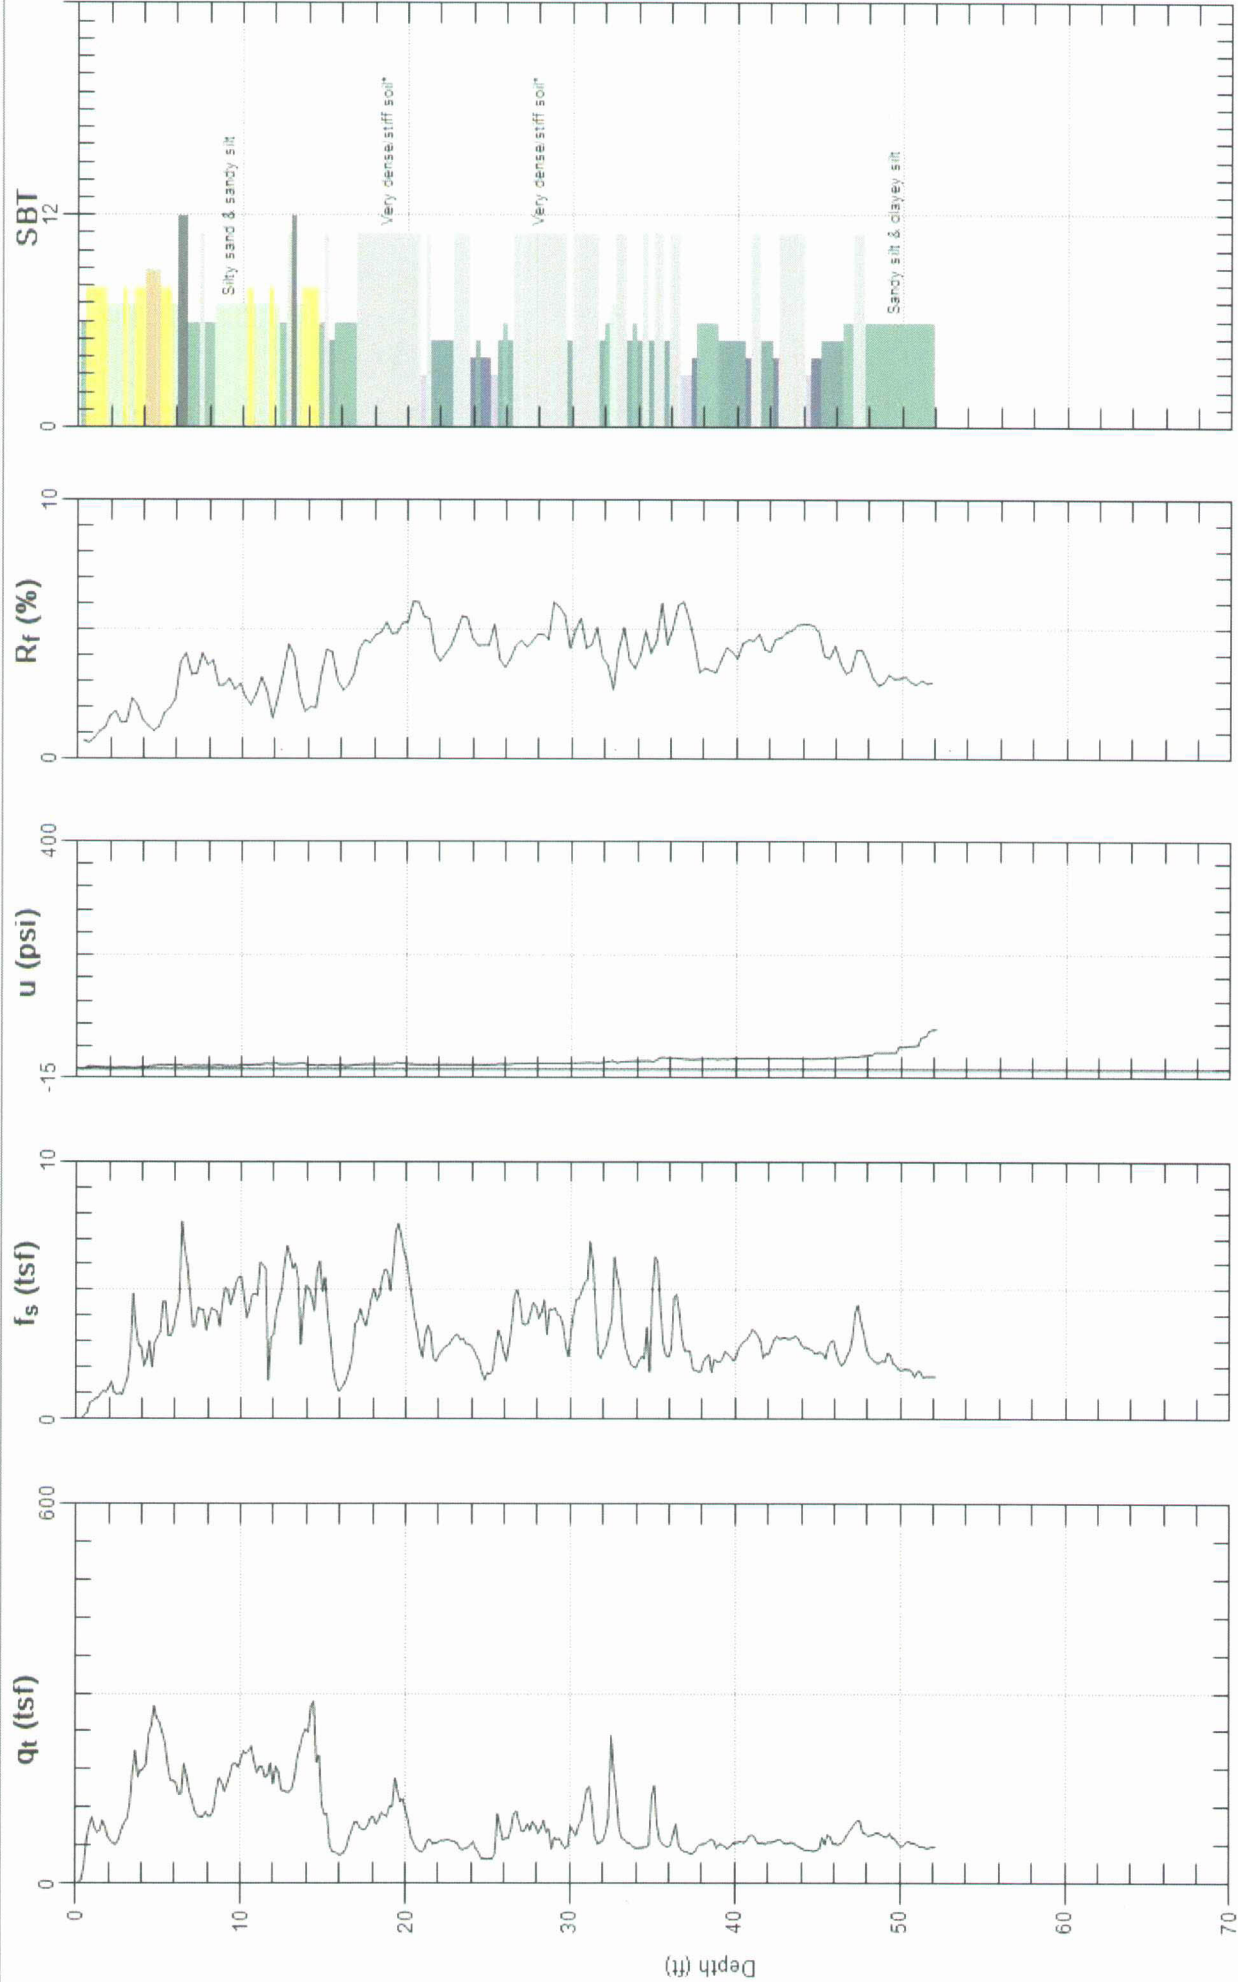

Max. Depth: 52.165 (ft)
Avg. Interval: 0.328 (ft)

Figure A - 25



Site: YUCCA CHAMPION
Sounding: CPT-12

Engineer: S.KOLTHOFF
Date: 1/22/2014 04:52

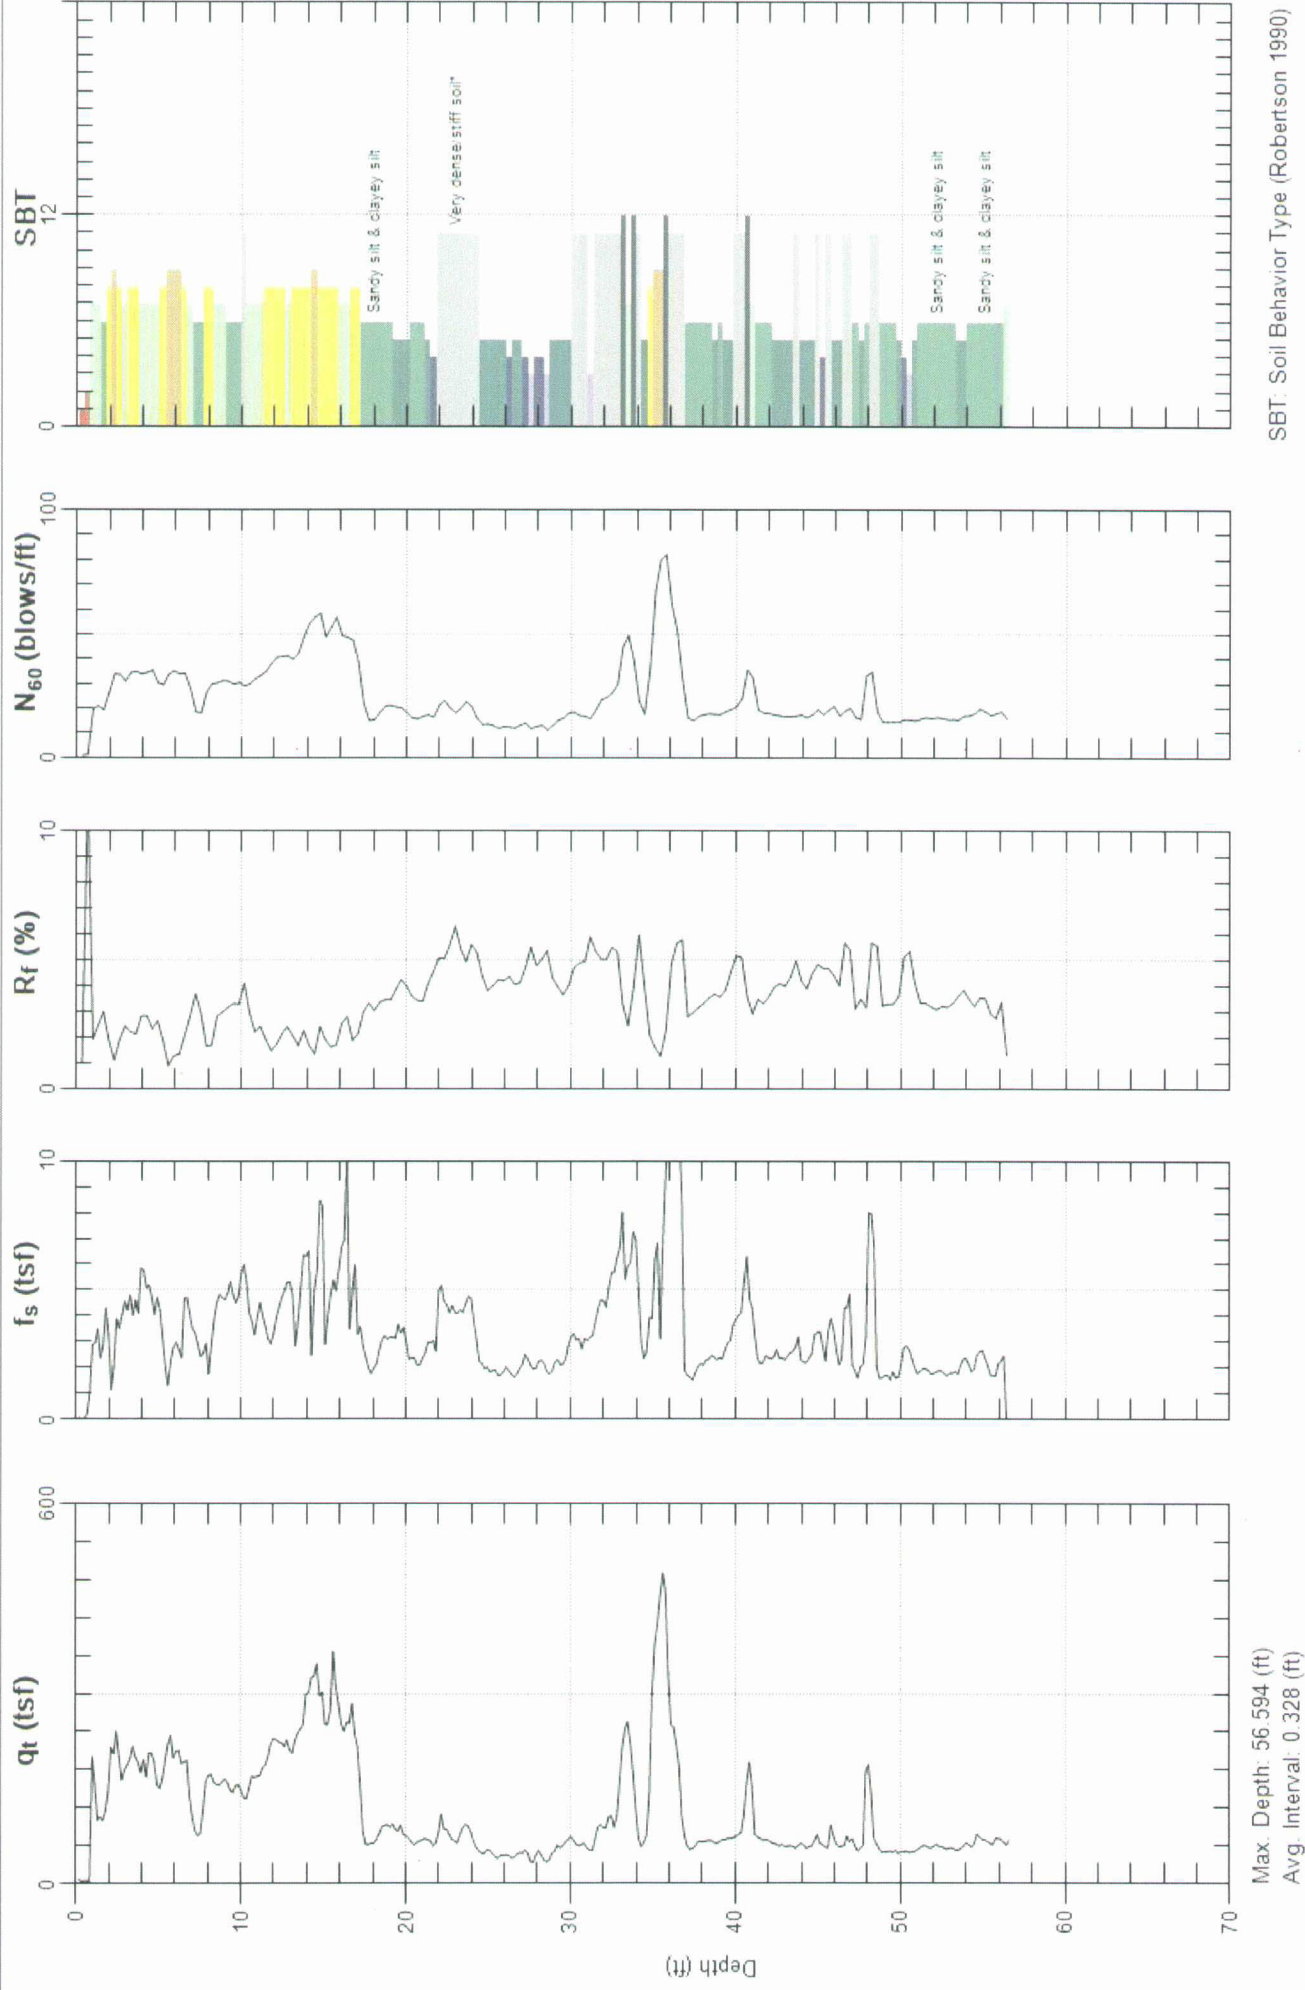


Figure A - 26




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-12

Date: 1/22/2014 04:52

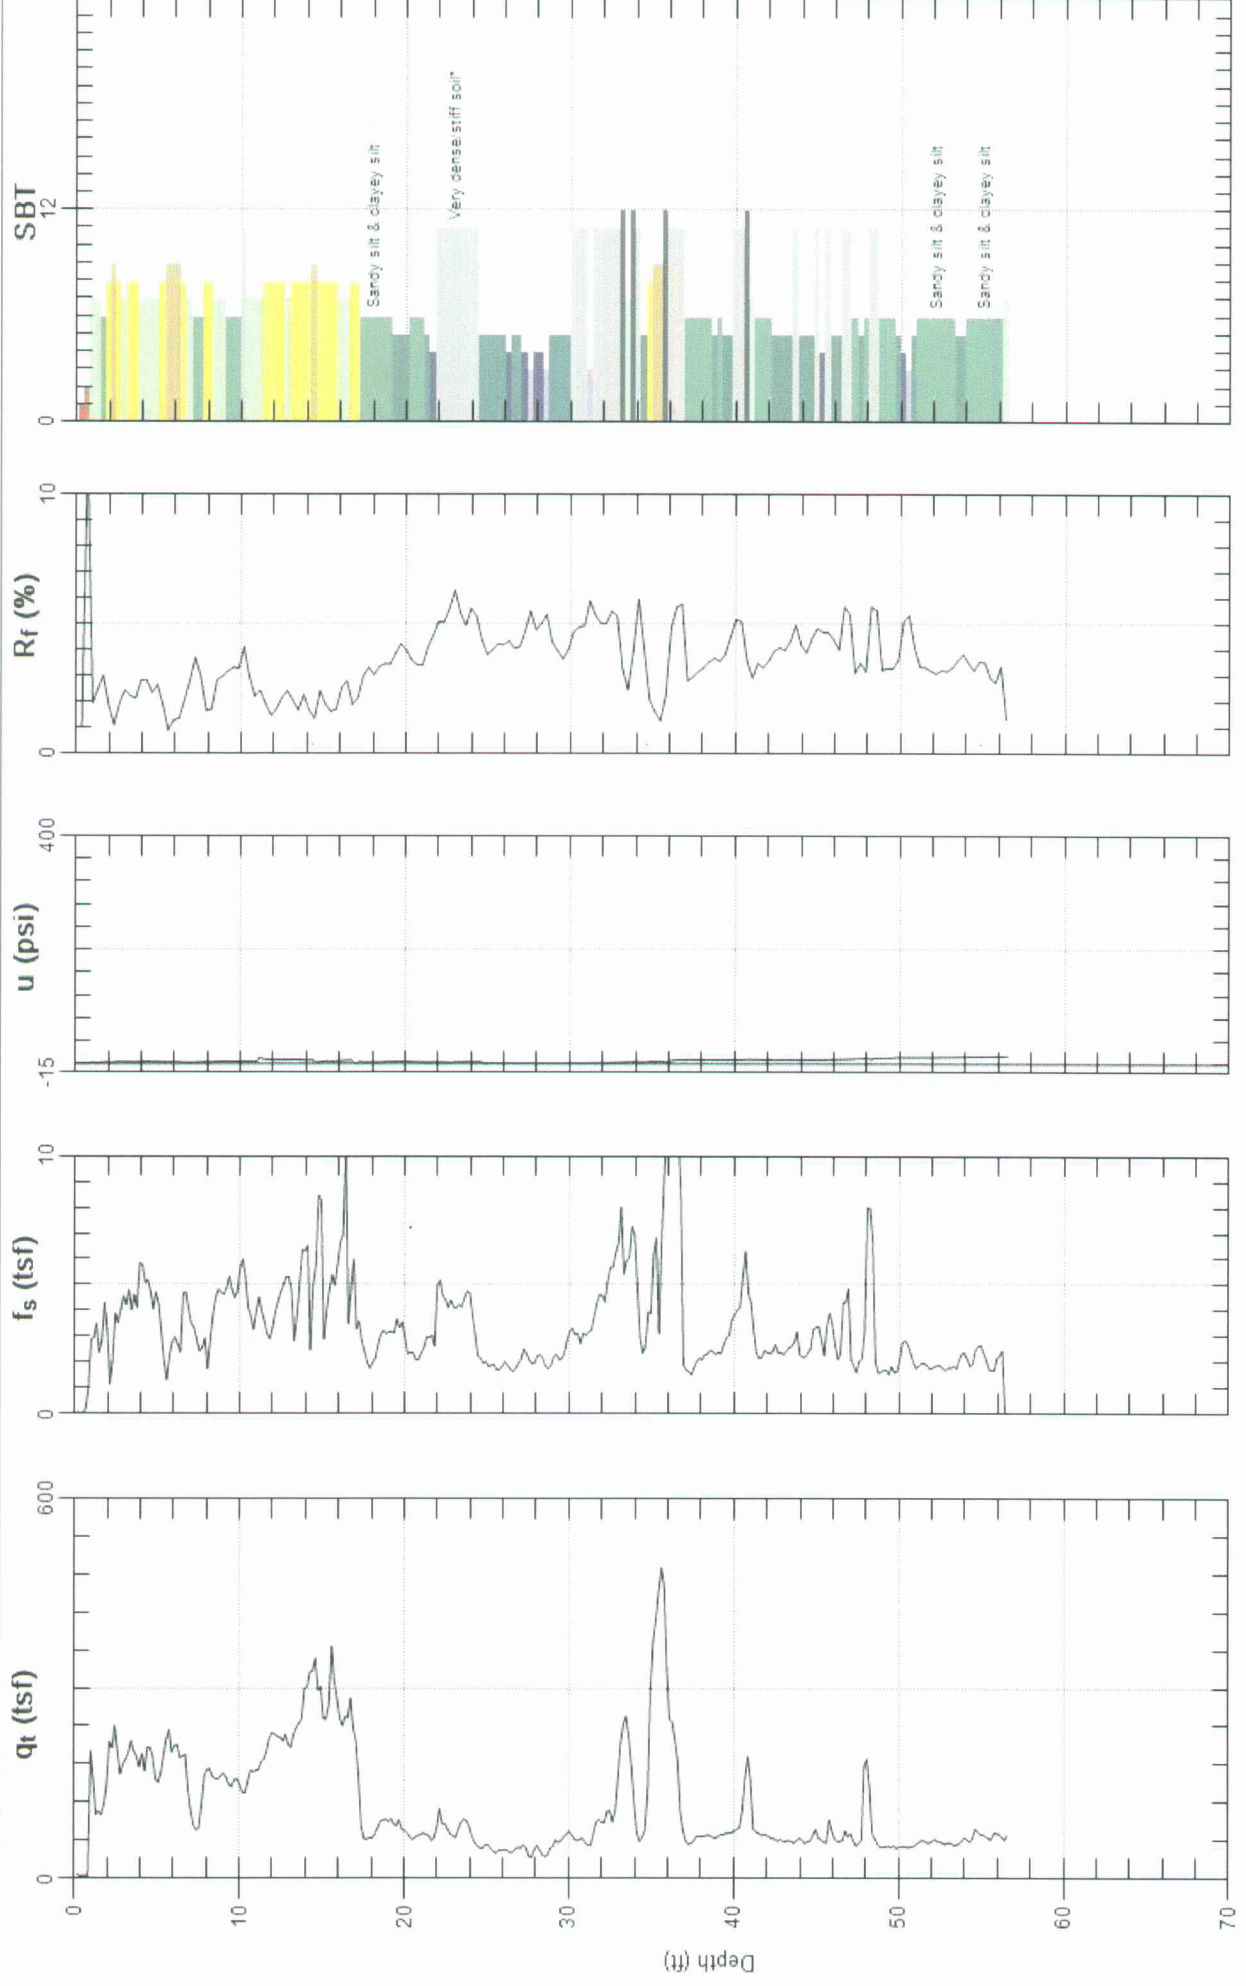

Max. Depth: 56.594 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

Figure A - 27




Site: YUCCA CHAMPION

Engineer: S.KOLTHOFF

Sounding: CPT-13

Date: 1/22/2014 12:18

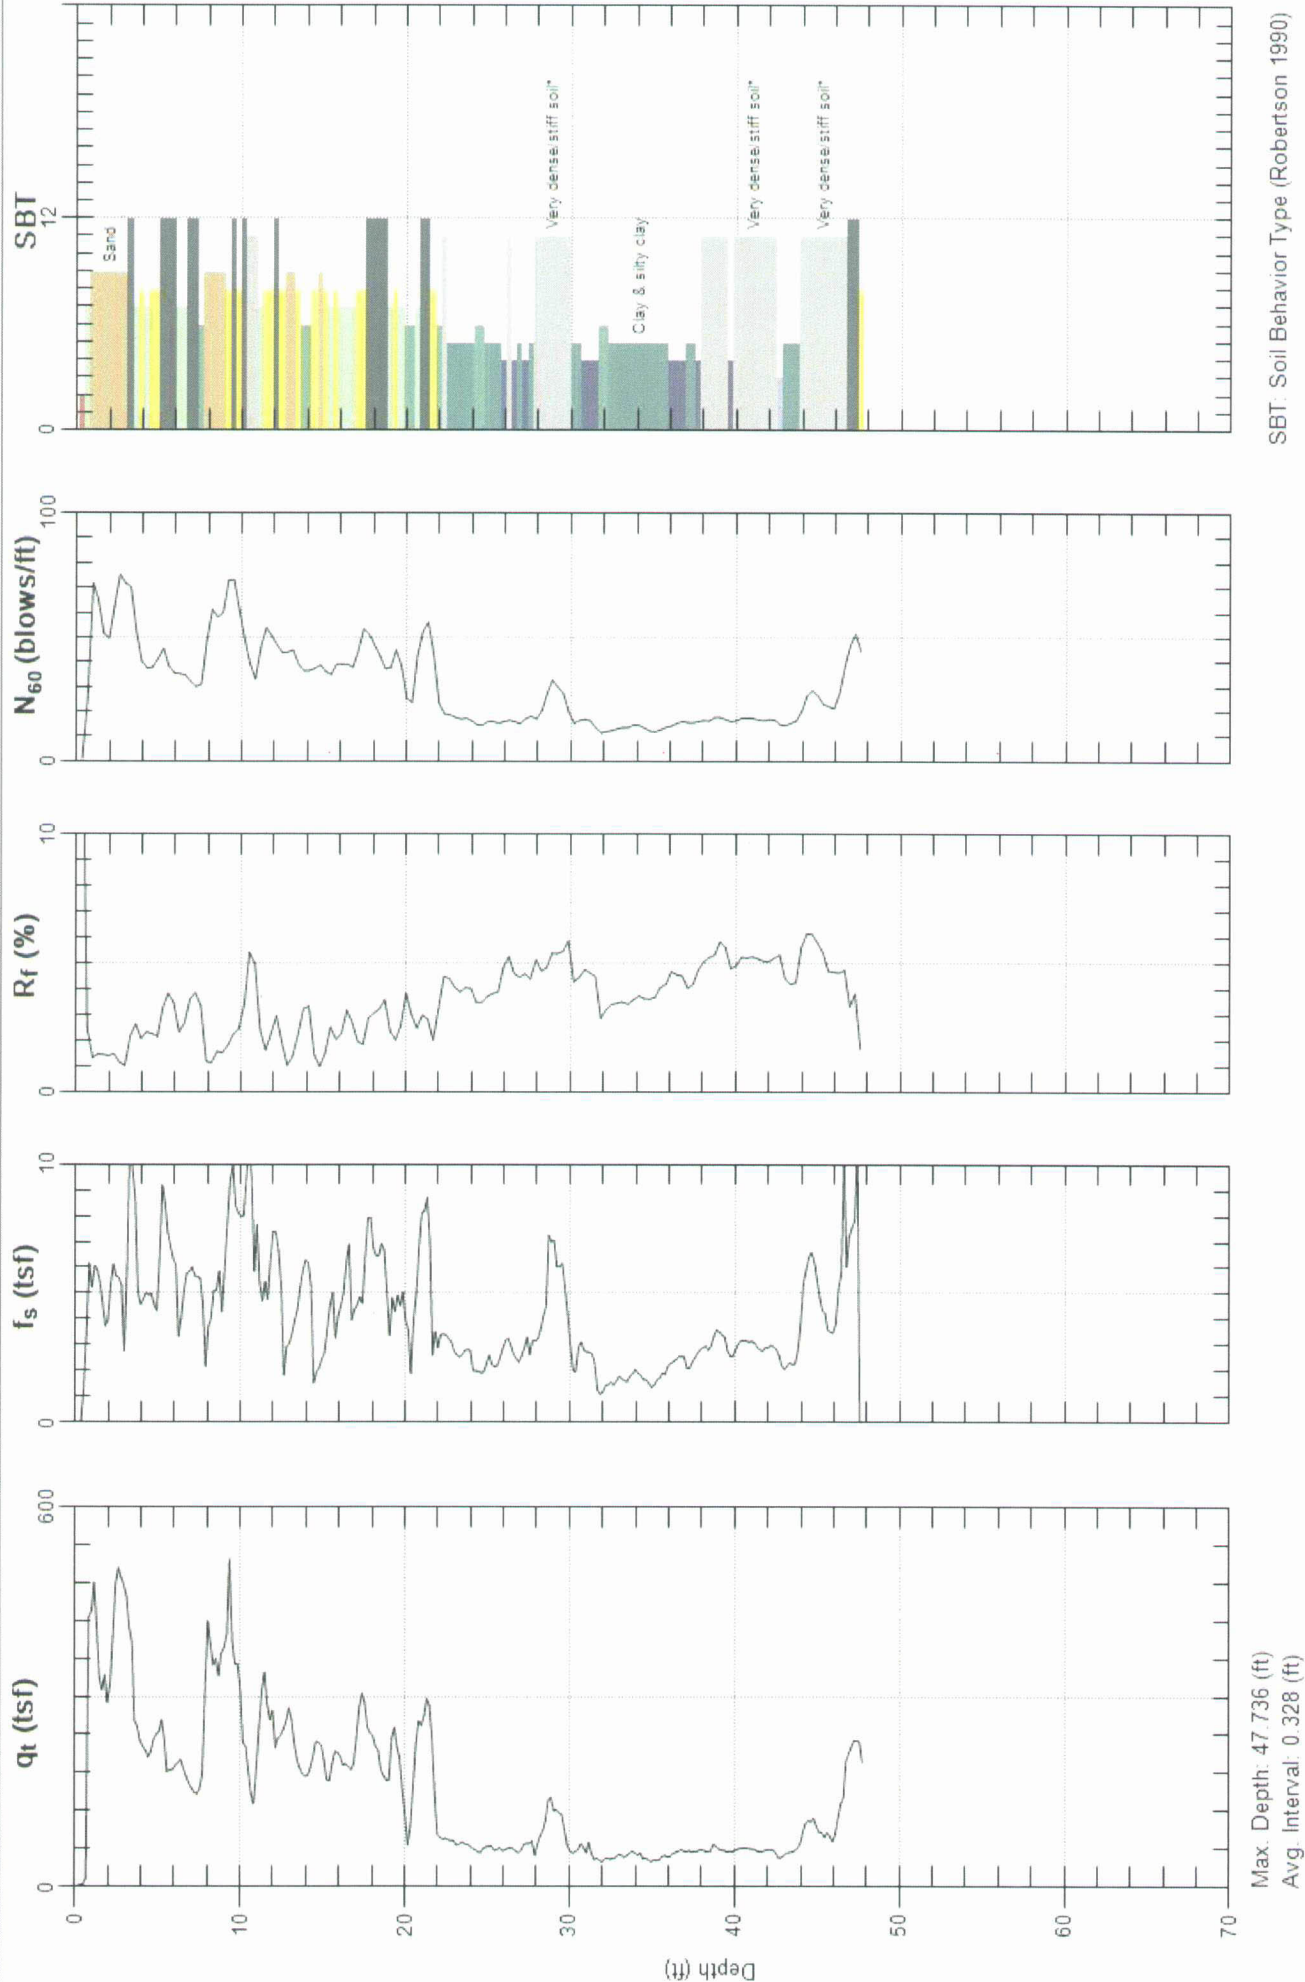


SBT: Soil Behavior Type (Robertson 1990)

Figure A - 28



Site: YUCCA CHAMPION
Sounding: CPT-13

Engineer: S.KOLTHOFF
Date: 1/22/2014 12:18

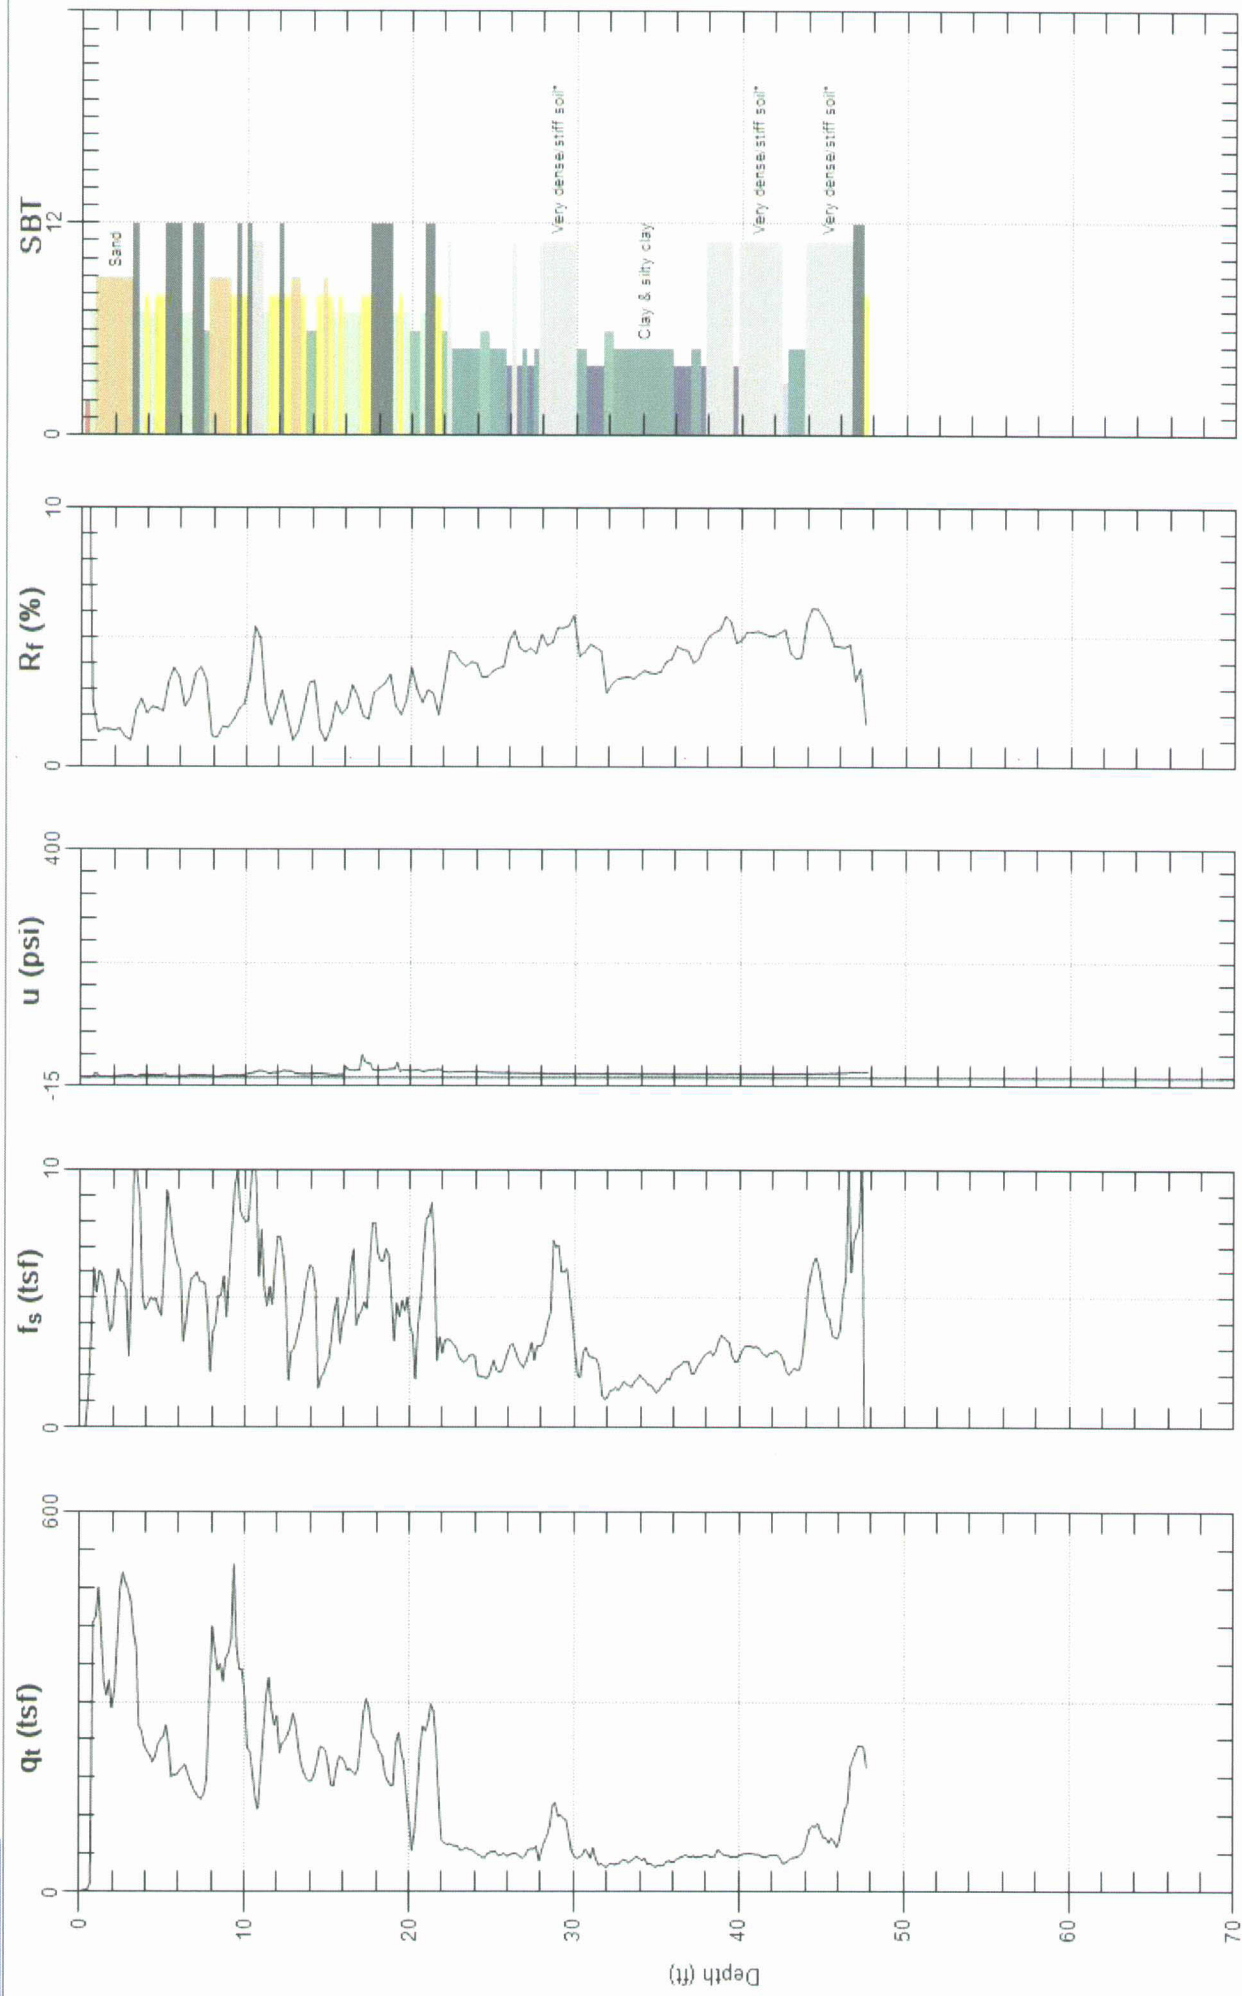

Max. Depth: 47.736 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-1
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/31/14 to 1/31/14	LOGGED BY TO	SHEET NO. 1 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 30 ft.			APPROXIMATE SURFACE ELEVATION (feet) 418	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
415									Approximately 3.5 inches of Asphalt Artificial Fill				
5									Silty SAND to Clayey SAND 7.5 YR 6/8 (Reddish Brown) , dry, fine to medium grained sand, some fine to coarse gravel with cobbles.				
410									Older Alluvium (Qoal)				
10									Clayey SAND , 7.5 YR 5/6 (Strong Brown), humid to moist, fine to medium grained sand, some coarse sand, trace fine gravel and cobbles. Sandy Clay to Clayey Sand mottled 5 YR 7/1 (Yellowish red) and 5 YR 7/1 (Light Gray), humid to moist, some fine gravel and coarse sand, well developed soil.				
405									Modelo Formation (TM)				
15									Sandstone, Siltstone, Claystone 10YR 6/1 (Strong brown) to 7.5YR 7/1 (light gray), thinly bedded, some oxidation, some caliche. Poorly Graded Sand, Silt and Clay 10 YR 7/6 (Yellowish Brown) to 10 YR 6/1 (Light Gray) moist, mostly sand, cobbles and gravels throughout.				
400									Modelo Formation (TM)				
20													
395													

GDC_CORE ENG_REV LA-1183 CORE LOGS GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618


THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-29 a

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-1
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/31/14 to 1/31/14	LOGGED BY TO	SHEET NO. 2 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 30 ft.			APPROXIMATE SURFACE ELEVATION (feet) 418	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
390									Sandstone, Siltstone, Claystone 7.5YR 7/1 (light gray), wet, thinly bedded, some oxidation.				Water @ 30 Ft.
30													
385													
35													
380													
40													
375													
45													
370													
									Interbedded Sandstone, Siltstone and Claystone 7.5 YR 7/1 (Strong Brown) to 7.5 YR 7/1 (Light Gray), wet, fine grained sand, some oxidation.				

GDC ROCK CORE ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14

	GROUP DELTA CONSULTANTS, INC. 32 Mauchly, Suite B Irvine, CA 92618	THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.	FIGURE A-29 b
---	---	--	----------------------

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-2
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/30/14 to 1/30/14	LOGGED BY TO	SHEET NO. 1 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 27 ft.			APPROXIMATE SURFACE ELEVATION (feet) 415	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
5	410								<u>Asphalt</u> <u>Artificial Fill</u> Silty SAND, 7.5 YR 5/8 (Strong Brown) , moist, mostly medium to coarse sand, some fine sand, some fines, little fine to coarse gravel, trace cobbles.				
10	405								<u>Older Alluvium (Qoal)</u> Clayey SAND, 7.5 YR 5/6 (Strong Brown) with grayish mottling, moist, fine sand. -Trace fine gravel -Polished surfaces Sandy CLAY, 5 YR 4/6 (Yellowish Red), dry to moist, fine sand. Caliche, 10 YR 7/6 (Yellow), layers of well deveoped carbonate.				
15	400												
20	395								<u>Modelo Formation (TM)</u> Sandstone, 10YR 7/8 (Yellow), dry to moist, mostly fine to medium sand, abundant carbonate infilling. <u>Modelo Formation (TM)</u> Clayey Sandstone, 7.5 YR 8/1 (White) and 7.5 YR 6/8 (Reddish Yellow), dry to moist, mostly fine to medium sand, abundant carbonate. Sandstone, 7.5 YR 6/8 (Reddish Yellow), moist to wet, mostly fine to medium sand, with some carbonate infilling in joints.				

GDC_ROCK_CORE_ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-30 a

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-2
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/30/14 to 1/30/14	LOGGED BY TO	SHEET NO. 2 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 27 ft.			APPROXIMATE SURFACE ELEVATION (feet) 415	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES	
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER							
30	385								-Layer of Clayey Sandstone, 7.5 YR 5/8 with carbonate infilling -Wet, 7.5 YR 5/6 (Strong Brown) -Mottled 10 YR 6/8 (Brownish Yellow) and 10 YR 8/1 (White) Clayey Sandstone , 7.5 YR 5/8 (Strong Brown), wet, fine to medium sand, minor white mottling. Sandstone , mottled 7.5 YR 8/1 (White) and 7.5 YR 5/8 (Strong Brown), wet, fine to medium sand. -Becomes 10 YR 6/6 (Brownish Yellow) -Layer of Clayey Sandstone, 7.5 YR 6/8 (Reddish Yellow), carbonate infilling of fractures. Sandy Claystone , mottled 7.5 YR 8/1 (White) and 7.5 YR 5/8 (Strong Brown), wet, fine sand. Sandstone , 7.5 YR 5/6 (Strong Brown), wet, fine sand. Sandy Claystone to Clayey Sandstone mottled 7.5 YR 8/1 (White) to 7.5 YR 5/8 (Strong Brown), wet, fine to medium sand.					
35	380													
40	375													
45	370													

Ground water @ 27'

GDC ROCK CORE ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-30 b

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-2
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/30/14 to 1/30/14	LOGGED BY TO	SHEET NO. 3 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 27 ft.			APPROXIMATE SURFACE ELEVATION (feet) 415	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
55	360								Conglomerate Bed Sandy Claystone to Clayey Sandstone mottled 7.5 YR 4/1 (Dark Gray) and 7.5 YR 5/8 (Strong Brown), wet, mostly fine sand.				
60	355								-Sand lense with carbonate infilled fracture				
65	350								Total Depth: 60 Ft Groundwater: Encountered at 27 Ft Boring backfilled with tamped cuttings and asphalt patched.				
70	345												

GDC ROCK CORE ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-30 c

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-3
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/30/14 to 1/30/14	LOGGED BY TO	SHEET NO. 1 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 28 ft.			APPROXIMATE SURFACE ELEVATION (feet) 414	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
410	5								<u>Asphalt</u> <u>Artificial Fill</u> Silty SAND, 7.5 YR (Strong Brown), moist, mostly medium to coarse sand, some fine sand, few fine gravel, trace cobbles.				
405	10								<u>Older Alluvium (Qoal)</u> Silty SAND, 7.5 YR 5/8 (Strong Brown), moist, mostly fine sand. Clayey SAND, 7.5 YR 5/8 (Strong Brown), moist, mostly fine sand, trace fine gravel. -Few medium sand and trace coarse sand				
400	15								Sandy Clay, mottled 7.5 YR 6/8 (Reddish yellow) to 7.5 YR 7/1 (Light Gray), moist, fine sand, oxide staining, polished surface along bedding, very weathered. -Carbonate infilled fractures				
395	20								-Coarsening sand, carbonate infilling continues				
390									<u>Modelo Formation (TM)</u>				

GDC ROCK CORE ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.
 32 Mauchly, Suite B
 Irvine, CA 92618


THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-31 a

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-4
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/29/14 to 1/29/14	LOGGED BY TO	SHEET NO. 1 of 2
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 36
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 31 ft.			APPROXIMATE SURFACE ELEVATION (feet) 413	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	


DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
410									<u>Asphalt</u> <u>Artificial Fill</u> <u>Artificial Fill</u> Silty SAND , 7.5 YR 5/8 (Strong Brown), moist, fine to medium sand, little fine gravel, trace cobbles. Clayey SAND 7.5 YR 4/6 (Strong Brown), moist, medium to coarse sand, some fine sand, few fine to coarse gravel, trace cobbles. <u>Older Alluvium (Goal)</u> Clayey SAND , 7.5 YR 5/8 (Strong Brown), moist, fine to medium sand, little coarse sand, some fine gravel, trace cobbles. Silty SAND , 7.5 YR 5/8 (Strong Brown), moist, medium to coarse sand, some fine sand, trace fine gravel. Clayey SAND , 7.5 YR 5/8 (Strong Brown), moist, medium to coarse sand, some fine sand, trace fine gravel. -No recovery Sandy Claystone to Clayey Sandstone mottled 7.5 YR 4/6 (Strong Brown) and 7.5 YR 6/1 (Gray), moist, fine to medium sand, trace coarse sand, trace cobbles.				
5													
405													
10													
400													
15													
395													
20													
390													

GDC ROCK CORE ENG_REV LA-1183 CORE LOGS.GPJ ROCK2 GDT 9/5/14

 GROUP DELTA CONSULTANTS, INC. 32 Mauchly, Suite B Irvine, CA 92618	THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.	FIGURE A-32 a
---	--	----------------------

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-4
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/29/14 to 1/29/14	LOGGED BY TO	SHEET NO. 2 of 2
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 36
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 31 ft.			APPROXIMATE SURFACE ELEVATION (feet) 413	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
385													
30													
									-Thin layer of Sandstone, wet, medium to coarse sand				
380													
35													
375									-Very hard drilling Total Depth: Refusal at 36 ft Groundwater: Encountered at 31 Ft Boring backfilled with tamped cuttings and concrete patched.				
40													
370													
45													
365													

	GROUP DELTA CONSULTANTS, INC. 32 Mauchly, Suite B Irvine, CA 92618	THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.	FIGURE A-32 b

GDC ROCK CORE ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-4A
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/31/14 to 1/31/14	LOGGED BY TO	SHEET NO. 1 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 31 ft.			APPROXIMATE SURFACE ELEVATION (feet) 413	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
410									<u>Asphalt</u> <u>Artificial Fill</u> Silty SAND , 7.5 YR 5/8 (Strong Brown), moist, mostly fine to medium sand, little fine gravel, trace cobbles.				
5									<u>Older Alluvium (Goal)</u> Clayey SAND 7.5 YR 4/6 (Strong Brown), moist, mostly medium to coarse sand, some fine sand, few fine to coarse gravel, trace cobbles. Clayey SAND , 7.5 YR 5/8 (Strong Brown), moist, mostly fine to medium sand, few coarse sand, trace fine gravel, trace cobbles. -Becomes 7.5 YR 4/4 (Reddish Brown) Clayey Sand to Sandy Clays mottled 7.5 YR 5/8 (Strong Brown) and 7.5 YR 7/1 (Light Gray), moist, mostly fine grained sand, few medium to coarse sand, trace fine gravel, some silt. -5 YR 4/4 (Reddish Brown) and 5 YR 6/1 (Gray), with white carbonate infilling.				
405													
10													
400													
15													
395													
20													
390													

GDC ROCK CORE ENG. REV. LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-33 a

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-4A
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/31/14 to 1/31/14	LOGGED BY TO	SHEET NO. 2 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 31 ft.			APPROXIMATE SURFACE ELEVATION (feet) 413	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
385													
30									Ground Water @ 31 ft.				
380													
35													
									-Mottled 10 YR 6/6 (Brownish Yellow) and 10 YR 7/1 (Light Gray), abundant carbonate infilling				
375													
40									Modelo Formation (TM) Sandstone, Siltstone, Claystone 10YR 6/1 (Strong brown) to 7.5YR 7/1 (light gray), thinly bedded, some oxidation. Modelo Formation (TM) cont..				
370													
45													
365													

GDC ROCK CORE ENG REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.


FIGURE A-33 b

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-4A
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/31/14 to 1/31/14	LOGGED BY TO	SHEET NO. 3 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 31 ft.			APPROXIMATE SURFACE ELEVATION (feet) 413	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
360													
55													
355													
60													
350													
65													
345													
70													
340													

Total Depth: 60 Ft
Groundwater: Encountered at 31 Ft
Boring backfilled with tamped cuttings and asphalt patched.

GDC ROCK CORE ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14

	GROUP DELTA CONSULTANTS, INC. 32 Mauchly, Suite B Irvine, CA 92618	THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.	FIGURE A-33 c

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-5
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/29/14 to 1/29/14	LOGGED BY TO	SHEET NO. 1 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 45 ft.			APPROXIMATE SURFACE ELEVATION (feet) 410	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
5	405								<u>Asphalt</u> <u>Artificial Fill</u> Silty SAND , 7.5 YR 4/3 (Brown), moist, mostly fine sand, few medium sand, some fine to coarse gravel, trace cobbles.				
10	400								<u>Older Alluvium (Qoal)</u> Clayey SAND 7.5 YR 4/6 (Strong Brown), moist, mostly fine to medium sand, some coarse sand, some fine gravel.				
15	395								Sandy SILT , mottled 10 YR 7/3 (Pale Brown), and 7.5 YR 5/8 (Strong Brown), moist, mostly fine sand, trace fine gravel.				
									Clayey SAND , 7.5 YR 4/6 (Strong Brown), moist, mostly fine to medium sand, some cobbles and gravel.				
									SAND , 7.5 YR 5/8 (Strong Brown), moist, mostly medium to coarse sand, few fine gravel, trace cobbles.				
20	390								Silty SAND , 7.5 YR 4/6 (Yellowish Brown), moist, mostly fine sand, trace fine gravel.				

GDC ROCK CORE ENG. REV. LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-34 a

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-5
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/29/14 to 1/29/14	LOGGED BY TO	SHEET NO. 2 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 45 ft.			APPROXIMATE SURFACE ELEVATION (feet) 410	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/NUMBER						
30	380												
35	375												
40	370												
45	365												

Buried Paleosol, Mottled 5YR 3/3 (Dark Reddish Brown) to 5YR 6/1 (Gray).

Clayey Sand, 5 YR 5/6 (Yellowish Brown), moist, mostly fine to medium sand, few coarse sand, trace fine gravel.
Ground water @ 45 ft.

-Mottled 5YR 5/6 (Yellowish Brown) to 5YR 6/1 (Gray)

GDC ROCK CORE ENG. REV. LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-34 b

LOG OF CORE BORING		PROJECT NAME Yucca & Argyle Fault Investigation	PROJECT NUMBER LA-1183	BORING B-5
SITE LOCATION Yucca and Argyle, Hollywood, Ca		DATE(S) DRILLED 1/29/14 to 1/29/14	LOGGED BY TO	SHEET NO. 3 of 3
DRILLING METHOD Hollow Stem Auger		DRILL BIT SIZE/TYPE 6"	CHECKED BY SK	TOTAL DEPTH DRILLED (feet) 60
DRILL RIG TYPE Marl M12		DRILLED BY Gregg In-Situ Drilling	INCLINATION FROM VERTICAL/BEARING 0	
APPARENT GROUNDWATER DEPTH 45 ft.			APPROXIMATE SURFACE ELEVATION (feet) 410	
COMMENTS			BOREHOLE BACKFILL Soil Cuttings	

DEPTH (ft)	ELEVATION (ft)	ROCK CORE						LITHOLOGY	MATERIAL DESCRIPTION	PACKER TESTS	LABORATORY TESTS	DRILL RATE, FEET/HOUR	FIELD NOTES
		RUN NO.	BOX NO.	RECOVERY, %	FRAC. FREQ.	R.Q.D., %	FRACTURE DRAWING/ NUMBER						
55	355								<p>Sand, 7.5 YR 6/2 (Strong Brown), wet, mostly medium to coarse sand, some fine sand, few fine gravel.</p> <p>Clayey Sand, 5YR 4/4 (Reddish Brown) mottled with 7.5YR 6/2 (Pinkish Gray), wet, mostly fine to medium sand, trace coarse sand, trace fine gravel.</p> <p>Clayey Sand, 5YR 4/4 (Reddish Brown), wet, mostly fine sand, few medium sand.</p>				
									Sand 5YR 5/6 (Yellowish Brown), wet, mostly medium to coarse sand, some fine sand, few fine gravel.				
60	350								<p>Modelo Formation (Tm)</p> <p>Sandy Claystone 5YR 4/4 (Reddish Brown), wet, mostly fine sand, some fines.</p>				
65	345								<p>Total Depth: 60 Ft</p> <p>Groundwater: Encountered at 45 Ft</p> <p>Boring backfilled with tamped cuttings and asphalt patched.</p>				
70	340												

GDC ROCK_CORE_ENG_REV LA-1183 CORE LOGS.GPJ ROCK2.GDT 9/5/14



GROUP DELTA CONSULTANTS, INC.

32 Mauchly, Suite B
Irvine, CA 92618

THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED.

FIGURE A-34 c

APPENDIX B: SOIL STRATIGRAPHIC AGE ASSESSMENTS

ROY J. SHLEMON & ASSOCIATES, INC.

Geologic and Environmental Consultants

P.O. Box 3066
Newport Beach, CA 92659-0620

Tel: 949-675-2696
E-mail: rshlemon@jps.net

Quaternary Geology
Economic Geomorphology
Soil Stratigraphy
Geoarchaeology
PG 2867; CPG 1766; CPESC 2167

APPENDIX B

SOIL-STRATIGRAPHIC AGE ASSESSMENTS AND PALEO-ENVIRONMENTAL RECONSTRUCTION, GROUP DELTA CONSULTANTS EAST AND WEST TRENCHES, 6230 YUCCA STREET, HOLLYWOOD AREA, CITY OF LOS ANGELES, CALIFORNIA

INTRODUCTION

This Appendix summarizes soil-stratigraphic field measurements and descriptions for dating relative fault activity (time of last displacement) and for reconstructing local geomorphic evolution over the last ~200-300 ka at and near the proposed "Yucca Street" development (Group Delta Consultants, Inc. [GDC], Plate 1, Site 2). The main purpose of the GDC investigation was to determine whether or not the inferred "Argyle Strand" of the Hollywood fault zone affects the proposed site (GDC Plate 1; Hernandez and Treiman, 2014). Accordingly, in addition to onsite and adjacent-site cone penetrometer tests (CPT) and continuous cores, GDC excavated and logged two onsite trenches, informally deemed the "west" and the "east" trenches, respectively (GDC, Plate 1). The two Yucca (Site 2) trenches, excavated and logged under the direction of GDC, complement other site-specific geological and geotechnical analyses (GDC narrative and appendices) to assess possible fault presence and relative activity.

The main purposes of this investigation (Appendix B) were several-fold:

1. To measure and describe a representative soil-stratigraphic section from initial exposures in the west trench;

Appendix B

Page 2

2. To determine the approximate age of the west-trench sediments based mainly on relative soil-profile development of the several paleosols encountered in the trench;
3. To reconstruct the latest Pleistocene-Holocene fluvial environment of deposition as recorded in the west trench exposures; and, from the east trench exposures, to explain the geomorphic evolution of the site and adjacent properties to the east (GDC Plate 1; Site 3) and the northeast (Site 4);
4. To assess the validity of two radiocarbon dates for the west trench sediments, particularly focusing on potential sample contamination; and to evaluate the stratigraphic validity of east-trench dates for age of “middle” Argyle Channel deposits;
5. To assist GDC with correlation of trench exposures and adjacent cone penetrometer test (CPT) transects and continuous cores; specifically, those data obtained onsite as well as from on-going investigations at Site 1 on the south and at Site 3 to the east (GDC, Plate 1).
6. To deduce the likely characteristics and relative activity of various Hollywood fault segments inferred to potentially impact the site based on review of the published literature and on exposures in the two, on-site trenches; and
7. To provide an independent “Quality Assurance” critique of the GDC draft report in compliance with current geologic standards-of-practice applicable to fault-activity investigations.

The field work was commissioned by GDC and included various field, office and laboratory meetings with GDC personnel and with reviewers from the California Geological Survey and the City of Los Angeles. These took place from February through July 2014. The west trench field measurements were carried out on 13 February and 29 March; and the east trench documentation took place on 11 June and 7 July, respectively.

GDC personnel and Engineering Geologist Steven Kolthoff logged the trenches and kindly provided field logistical support. I particularly thank Steven Kolthoff and GDC engineers Michael Reader and Thomas Swantko for their much-appreciated courtesy and assistance.

Appendix B

Page 3

Two formal soil-stratigraphic sections were measured at the Yucca west trench; on the west wall at station 0+55 (Table 1), and in a basal “trench box” at station 0+35 (Table 2). Representative east-trench sections were documented on the east wall at station 0+60 (Table 3) and on the west wall at station 0+78 (Table 4). Pertinent location and geologic maps, trench logs, and CPT and continuous core data are given in the GDC narrative and hence are referred to, but not replicated in this document.

This Appendix uses traditional pedological (soil science) terminology and field methodology described in Soil Survey Division Staff (1993), in Soil Survey Staff (1999) and in Schaetzl and Anderson (2005). The applicability of soil-stratigraphy to fault-activity assessments for construction of residential and commercial properties, dams, landfills and other large engineered structures is summarized in Shlemon (1985). Numeric dating and “calibration” with relative soil profile development is reviewed in Birkeland (1999), McFadden (1989), and Eppes and others (2002).

Quantifying several key soil (pedogenic) properties by use of the “soil development index” (SDI) may provide an “age of weathering” (Harden, 1982). The index generally works well to determine the age of surface profiles, particularly chronosequences on flights of fluvial terraces. For buried soils, however, such as those at the Yucca site, the “Harden index” may yield incorrect results. Specifically, physical truncation or chemical alteration usually leaves only two or three soil characteristics amenable for quantification; for example, color change (rubification) with depth, expressed by Munsell notation; frequency and relative development of secondary clay films; and decrease in clay content from an argillic (Bt) horizon compared with primary (depositional) clay in the parent material (C horizon). Typically, however, as exposed in the Yucca west trench fluvial deposits, the laterally discontinuous, grossly fining-upward deposits make it almost impossible to confidently calculate the amount of translocated (pedogenic) clay compared with that inherent in the parent material. Moreover, local rubification may be derived from erosion of nearby, previously weathered sediments, a problem particularly affecting age assessments of paleosols identified in subsurface cores. In brief, age quantification of truncated buried soils, based only on a few preserved physical and chemical “signatures,” too often results in dates with high uncertainty, even though some practitioners provide numbers to two or more significant figures. The age estimates for the Yucca trench soil-stratigraphy are therefore given in realistic ranges (Tables 1 through 4) to encompass uncertainty inherent in dating partially preserved paleosols.

WEST TRENCH STRATIGRAPHY

The Argyle Channel

The Yucca west trench, locally up to ~35-ft deep, exposed several interbedded and laterally discontinuous, grossly fining-upward sedimentary “packets” laid down in a former stream channel (fan distributary ?) informally named the “Argyle Channel” after its southwest trend down the street of that name and through the site (GDC Fig. 6). The channel thalweg is exposed near the bottom of the west trench (GDC Plate 2 and Appendix D; photographs 1 and 3). The Argyle sediments are mainly bar and channel, capped by a remnant, slightly developed surface soil and replete with four intercalated buried paleosols. Each soil represents an epoch of relative landscape stability and hence a time of weathering (soil formation).

The basal trench unit, incised into and unconformably overlain by the Argyle Channel, is a truncated mudflow (Qm) bearing a remnant soil (dark yellowish brown [10YR 3/6] to dark brown [7.5YR 3/3] silty clay loam [Table 2]). This, in turn, is underlain by matrix-supported angular clasts (debris flows; Qdf) clearly exposed in the east trench (GDC Plate 5) and recognized in CPT transects and in continuous cores (GDC Plates 1 and 4). Topographically, the Argyle Channel no longer exists, its “upstream” source apparently “cut off” by early development in this area. Significantly, however, its sedimentary characteristics and incision into underlying, older clayey deposits indicates relatively abrupt, regional environmental change from deposition of mud- and debris-flows to relatively clean, high-energy fluvial gravels and silts. This major unconformity most likely stems from regional climate and vegetation change, and therefore ostensibly identifies onset of “pluvial” conditions in this area. For conservatism, this is judged to have taken place as recently as ~12-16 ka ago, temporally associated with marine oxygen-isotope stage 2. Accordingly, based on the abrupt change in fluvial environments, the base of the Argyle Channel is at least ~10-12 ka old; an age corroborated by the cumulative age of its several, intercalated buried soils.

Soil-Stratigraphic Measurements and Descriptions

The ~35-ft thick Argyle Channel sediments and paleosols were described from west-trench exposures on the west wall at Station 0+55 (Table 1); and the lower several ft were described from a “box trench” exposure at the base of the trench at Station 0+35 (Table 2).

Appendix B

Page 5

Station 0+55

The Station 0+55 soil-stratigraphic section was measured to a depth of 18.5 ft, essentially the top of Bench 4 (GDC Plate 2). As documented in Table 1, artificial fill is underlain by about 3-ft of gravelly coarse sand grading upward to a loamy medium sand. The section is sufficiently weathered to have developed ~0.8-ft thick cambic (color) horizons (Bw1 and Bw2). No translocated clay is apparent. Nevertheless, weathering in Mediterranean climate, coarse-grained sediments requires at least an estimated 1 ka of weathering (McFadden, 1989). This surface soil is therefore deemed to be “very slightly developed.”

Another grossly fining-upward packet of sediments occurs between ~3.8 to 7.8 ft (Table 1). A similar, “very slightly developed” buried soil caps this packet. The upper cambic horizon (2Bw1b) is truncated but, combined with the lower horizon (2Bw2b), similarly represents about ~1-2 ka of weathering.

A second, truncated buried paleosol occurs at a depth of 7.8 ft (Table 1). This soil, however, bears a weak argillic horizon (3Btb) typified by strong brown (7.5YR 4/6) thin clay films that bridge mineral grains and line ped faces. Based on relative development, this “slightly developed” paleosol is judged to represent ~2-3 ka of weathering.

The top of a third, similarly truncated buried paleosol is identified at 10.4 ft (Table 1). Two weak argillic horizons (4Bt1b and 4Bt2b) are characterized by fine, dark yellowish brown (10YR 4/4) fine clay films that line ped faces and locally bridge root pores. A “slightly developed” profile suggests that ~2-3 ka of weathering took place before burial by overlying sediments.

A fourth paleosol caps another fining-upward sequence at a depth of 14.5 ft (Table 1). The identified argillic horizon (5tb) is only 0.5-ft thick, probably truncated by deposition of the overlying coarse gravelly sand. Here, too, the horizon probably formed in ~2 ka. These particular deposits locally incise 2-3 ft into the underlying sediments, typical “cut-and-fill” deposition within the Argyle Channel.

In brief, relative development of the surface and the four buried paleosols suggests a cumulative age of at least ~10-12 ka of weathering, a minimum age for the Argyle Channel deposits. More likely, however, based on thalweg incision into the underlying clay and the dramatic change in the fluvial environment, the

Appendix B

Page 6

basal deposits are older, ostensibly initially laid down at least ~12-15 ka ago during onset of marine isotope stage 2.

Station 0+35

In order to assess relative profile development below the base of the Argyle Channel, GDC locally deepened the Yucca trench several ft, providing safe access by means of a "Trench Box" (GDC Appendix D, Photograph 7). As measured and described from Station 0+35, the trench box exposed ~7 to 8-ft of silty clay loam coarsening downward to sandy clay loam, and ultimately to interbedded, mixed coarse sand and granitic gravel lenses at the base (Table 2). The clayey parent material (Qm) is a regional stratigraphic marker, exposed continuously at the base of the Yucca west trench, discontinuously throughout the east trench, and identified in adjacent continuous cores and on CPT transects.

A distinct, though truncated, buried paleosol was identified at the box trench exposure. This soil has two discrete, buried argillic horizons (6Bt1b and 6B2tb; Table 2). The argillic horizons are mainly silty to sandy clay loam, dark brown (7.5YR 3/3) to dark brown (7.5YR 4/4) in color, and replete with few to common fine, dark brown (7.5YR 3/4) clay films that line ped faces, bridge mineral grains and fill old root pores. The trench box exposures show that basal Argyle channel gravels are incised and truncate the underlying paleosol at least about one ft. Nevertheless, sufficient argillic horizon characteristics remain to deem the soil as "moderately developed," thereby representing an additional ~8-15 ka of weathering.

West Trench Radiocarbon Dates

Two "charcoal" samples were collected for potential radiocarbon assay (GDC Appendix C): "Charred material" at ~14-ft (Yucca # 2); and "organic sediments" at ~18-ft (Yucca # 1; GDC Appendix C). The Yucca samples were dated by "standard radiocarbon assay." Such dates may be questionable when sample size is small, where there is potential for modern groundwater contamination, and where samples are taken from high-energy environments and thus potentially reworked from older, "upstream" sediments.

As shown on the trench log (GDC Plate 2), the Yucca sediments are generally very coarse grained and devoid of laterally continuous, relatively impermeable clay beds to "perch" or otherwise prevent modern surface water from penetrating the entire section. Accordingly, the Yucca # 2 sample, dated as ~4300 BP (conventional) has been likely subject to contamination by younger gravitational

water. It is therefore likely at least 10 or 15 percent too young (Pigati and others, 2007). Similarly, and very highly suspect is the 41,000 BP age for Yucca # 1, obtained from sediments realistically not more than ~12 ka old. Most likely, therefore, this “disseminated organic sediment” was derived from “upstream” weathering of older sediments and transported in the high-energy, coarse fluvial sediment at the base of the Argyle Channel. This “too old” sample age is therefore rejected in favor of more reasonable, and conservative, soil-stratigraphic and paleo-environmental reconstruction.

EAST TRENCH STRATIGRAPHY

GDC excavated the ~160-ft long and ~30-35-ft deep east that overlapped the west trench and continued south across the Yucca property (Site 2) onto the adjacent Site 1 (GDC Plate 1). The east trench generally encountered four discrete Quaternary stratigraphic units, some bearing buried paleosols amenable to measurement, description and relative age assessments. As described by GDC (stratigraphic section, Fig. 10), the uppermost unit (youngest) pertains to the Argyle Channel, mainly fluvial and locally cross-bedded, medium- to coarse-sand and lenticular gravel beds (Qs). These are underlain by discontinuous mudflows locally capped by slightly to moderately developed buried paleosols (Qm). Underlying the mudflows are extensive debris flows, locally bearing discrete paleosols indicative of periodic (climatically controlled ?) landscape stability and soil formation (Qdf). The debris flows are mainly derived from adjacent upstream and sideslope “older alluvium” (Qoal) that once extended across the entire area. As encountered in onsite and adjacent cores, the Yucca area is underlain by Modelo formation “bedrock” (Tm).

Paleo-Environmental Reconstruction - East Trench Exposures

The east trench exposures supported initial interpretations of core and CPT data about the likely origin and relative age of the mud- and debris flows that underlie the Yucca (Site 2) area. Specifically, as shown on GDC Fig. 7, a veneer of old (likely ~300 ka), “high-level” channel and fan deposits still mantle the eroded surface at Site 3, east of Argyle Street (GDC Plate 1). Based mainly on paleo-environmental interpretation of regional cores and on the east trench exposures, an ancestral drainage apparently incised the area ostensibly ~300 ka ago, giving rise to a steep channel wall underlying the present Argyle Street (GDC Plate 1). This channel was then filled by multiple debris flows emanating from upstream as well as from adjacent sideslopes. Debris-flow deposition was apparently episodic, or possibly even periodic, as deduced from preservation of slightly to

Appendix B

Page 8

moderately developed buried paleosols observed in the east trench. Many debris flows retain their original “brown to reddish brown” color, a result of previous, deep weathering of the their source sediments, the “high level” fan deposits (GDC Fig. 7).

The debris flows (Qdf) were, in turn, eroded and reworked, giving rise to relatively thin but readily discernible mudflows (Qm) that locally cover the debris flows and underlie the Argyle channel sands (Qs).

Additionally, as shown on the GDC trench log (Plate 5), the east trench exposed a south-verging anticline replete with an apparent slip surface (GDC Plate 5). Last apparent “movement” of this structure involved the debris flows (Qdf), but not the overlying mudflows (Qd) and the Argyle (Qs) deposits, as documented on the GDC logs (Plates 4 and 5).

Soil-Stratigraphic Measurements and Descriptions

Two representative soil sections were measured from the east trench exposures: on the east wall at station 0+60 (Table 3); and on the west wall at station 0+78 (Table 4). The station 0+60 descriptions particularly document the relative profile development of a buried paleosol that caps mudflows (Qm) deposits, which, in turn, unconformably overlie a buried paleosol formed on a local mud- debris flow transitional unit (Qm-Qdf). The station 0+78 soil section provides a detailed measurement and description of a buried paleosol that caps a horizontal, unbroken mudflow (Qm) directly overlying a slip surface (inferred fault) along a south-tilted, debris-flow bedding plane illustrated in GDC Fig. .

East Wall, Station 0+60

As documented in Table 3, the upper ~2.9-ft of section represent the base of the Argyle channel sands (Qs). These deposits are typically dark brown (10YR 4/3) to dark yellowish brown (10YR 4/4) sandy clay loam to fine sand with local, lenticular gravel lenses. Structure is typically massive to weak, fine angular, and thus indicative of the non-consolidation and relatively “youth” of Argyle channel sediments. At the measured section, the Argyle sediments are ~40-50 ft east of, and about halfway above the elevation of the main thalweg (see west trench log). Accordingly, based on stratigraphic position, their age is estimated to be ~4 - 5 k.

Horizons 2b1-2b2 (Table 3) mark a ~2.5-ft thick, remnant buried paleosol that caps underlying mudflow (Qm) deposits. The paleosol is a brown to dark brown (7.5YR 4/4 - 7.5YR 4/6) silt to loamy clay with moderate to strong, fine angular blocky structure. The paleosol is also very hard and sticky and plastic; and

Appendix B

Page 9

typified by few fine, yellowish brown (10YR 5/4) clay films that line ped faces and fill root pores. Based on its “moderate” relative development, this remnant soil represents an estimated ~20-30 ka of weathering before truncation and burial by Argyle channel (Qs) deposits.

A second, deeper paleosol (horizons 3B1b–3B3b) was also measured and described at station 0+60 (Table 3). This particular paleosol formed across a thin mudflow and is superimposed onto an underlying debris flow. Specifically, the truncated 3B1b horizon is a yellowish brown (10YR 5/6) to strong brown (7.5YR 5/6) sandy clay loam with moderate medium blocky structure. Characteristic are few to common, strong brown (7.5YR 5/6) clay films that line ped faces, bridge mineral grains and line root pores. The underlying parent material (horizons 3C1b through 3c3b) generally grade into debris flows with matrix supported, ~0.7-in angular clasts at the base (Table 3). Based on relative profile development, this buried paleosol represents another ~25-30 ka of local landscape stability and related weathering.

West Wall, Station 0+78

A very detailed, approximately 2.7-ft thick profile was measured at Station 0+78 on the west wall of the Yucca east trench (Table 4). This section specifically addressed the relative age of a mudflow and capping paleosol that lie horizontal and unbroken over tilted debris flows (Qdf) containing an interbedded slip surface conservatively assumed to be a fault (GDC Plate 6). The upper ~0.7 inches of the mudflow bear four discrete, now-buried argillic horizons (2B1b through 2b4b; Table 4) truncated by basal coarse sand and gravel associated with Argyle channel sediments (Qs). The paleosol horizons range in color from dark brown (7.5YR 5/4) to dark reddish brown (5YR 3/4) and formed on fine to coarse medium sandy loam parent material. The diagnostic argillic is the 2b3b (Table 4) with fine subangular blocky structure and few fine brown (7.5YR 5/4) clay films that line ped faces and bridge grains. Any reasonable “upward” projection of the GDC-logged slip surface does not offset the mudflow and its capping buried paleosol (GDC Appendix D [photograph]). Based on relative profile development, the buried paleosol represents at least ~30 k of weathering. Its parent material, the horizontal, unbroken mudflow (Qm) is inherently older. Last movement along the underlying slip surface therefore took place prior to at least ~30 k ago, and probably well before that time.

East Trench Radiocarbon Dates

GDC collected eight, west-trench charcoal samples for potential radiocarbon assay, all obtained from Argyle Channel sediments. As documented in Appendix C, the samples are identified as Mill-1 through Mill-7 and Yucca 4; and cumulatively provide standard radiocarbon ages ranging from about 4.1 to 4.4 ka. These values were anticipated based on stratigraphic position and are therefore accepted as reasonable; and they support the estimated age for west-trench exposures at this same stratigraphic level.

CORRELATION OF YUCCA TRENCH SEDIMENTS AND SOILS WITH ADJACENT CONTINUOUS CORES AND CPT SOUNDINGS

The Yucca (Site 2) east and west trenches provided an additional three major benefits to assess potential presence and activity of the inferred Argyle Strand of the Hollywood fault. First, the west trench exposed not only Argyle Channel sediments (Qs), but also underlying, relatively impervious clay (Qm). When initially opened, this clay perched water, essentially at the base of the thalweg. Perched water also was present on clayey channel-bordering mudflows and debris flows into which the Argyle Channel was incised. The several different clay beds are vertically separated ~20 ft, as deduced from on-site geotechnical borings (GDC, 2006). The elevation difference was apparently interpreted (Hernandez and Treiman, 2014) as evidence for a possible “Argyle Strand” of the Hollywood fault system (GDC Plate 1; Fig. 4). Now, however, the trench exposures show that the difference in water-level elevation stems from local Argyle Channel incision into several different, relatively impermeable clayey mud- and debris flows (stratigraphic units Qm and Qdf).

Second, until excavation of the Yucca trenches, several other nearby, Hollywood fault investigations (GDC Fig. 1) did not employ site-specific trenching. Rather, fault-activity assessments were based mainly on correlation of CPT data and locally on extrapolation of often widely spaced cores. In contrast, the 6230 Yucca Street (Site 2) trenches provide geologic “calibration” for correlation with adjacent CPT soundings and continuous cores. This allows for high-confidence “extrapolation” of site stratigraphy north and south of the Yucca trenches (GDC Plates 1, and 2), and thus better assesses whether or not the adjacent sediments are fault displaced.

Appendix B

Page 11

Third, the Yucca trenches provide the first complete exposure of post-bedrock (Tm) Quaternary sediments in the Hollywood area. Accordingly, based on geomorphic reconstruction and on numeric (radiocarbon) and relative dating (soil stratigraphy), the Yucca trenches expose an excellent stratigraphy from which to reconstruct local late Quaternary geomorphologic evolution, to determine the characteristics and age of local faults, and to reasonably date the last displacement of those observed at nearby Site 3 immediately east of Argyle Street (GDC Plate 1).

And finally, as particularly observed in the west trench, the Argyle Channel deposits are internally incised, often up to several ft (GDC Fig. 2). This local fluvial incision may well explain “inverted,” core-collected radiocarbon dates previously reported at the then, non-trenched Site 1, adjacent to the south (Langan, 2012; GDC Plate 1).

SUMMARY AND CONCLUSIONS

As part of standard-of-practice fault assessments, GDC emplaced and logged two trenches across a proposed development at 6230 Yucca Street (Site 2) in the Hollywood area of Los Angeles. The west trench, about 100-ft long and up to ~35 ft deep, and the east trench, over ~160 ft long and of similar depth, were purposely sited to determine the possible presence and relative activity (time of last surface or near-surface displacement) of the “Argyle Strand” of the Hollywood fault, recently included within a “Fault Hazard Zone” by the California Geological Survey (Hernandez and Treiman, 2014).

The west trench exposed the thalweg and an overlying 30-ft thick sequence of interbedded, grossly fining-upward fluvial sediments within the “Argyle Channel.” Soil-stratigraphic measurements and descriptions show that the Argyle Channel sediments are capped by a remnant, very slightly developed surface soil, and by four, underlying buried paleosols, ranging in relative development from very slight to slight. Based on “calibration” with numerically dated soils elsewhere in Mediterranean climates, the cumulative time of weathering for formation of the channel sediments is an estimated ~10-12 ka.

The Argyle Channel incises underlying, relatively impermeable clay that bears a truncated, slightly to moderately developed buried paleosol. This soil, with its distinct translocated clay films, represents another ~8-15 ka of weathering. Additionally, the abrupt unconformity between the base of the channel and the underlying clay, suggest onset of Argyle channel deposition during an epoch of

Appendix B

Page 12

regional pluviality, conservatively estimated as ~12-16 ka ago (marine isotope stage 2). From a pedogenic standpoint, the cumulative age of the trench-exposed Argyle channel and the underlying clay exceeds ~15 ka.

The lower of the two conventional radiocarbon dates from the west trench, Argyle Channel deposits is particularly suspect, owing to likely re-deposition of "organic sediment" (~41,000 bp) resulting in older contamination. Accordingly, more realistic estimates are derived from the cumulative age of the surface and four trench-exposed buried soils and from likely fluvial deposition onset during isotope stage 2.

The east Yucca trench overlapped the west trench to the north and extended onto Site 1 to the south. It exposed multiple debris flows that emanated both from upstream and from sideslope sources. The debris flows are overlain by locally discontinuous mudflows, similar to that observed at the base of the Argyle Channel deposits in the west trench.

A representative soil-stratigraphic section shows that the mudflows bear truncated paleosols with moderate relative profiles development, similar, if not exceeding the soil described in the west trench "box cut." The better preserved east-trench buried soils reflect ~ 25-30 ka of weathering.

Another east-trench soil profile was specifically described from an unbroken, horizontal mudflow that overlies an apparent slip surface within the south-dipping limb of a subsurface anticline. The buried soil is similarly moderately developed, again reflecting – in this case - at least ~30 k of weathering. The soil and its underlying mudflow parent material are undisplaced; therefore, last slip of the presumed fault at this location occurred well before ~30 ka ago.

The Yucca trench exposures also explain the origin for an apparent 20-ft vertical "offset" of piezometric surfaces recorded in adjacent, on-site geotechnical borings. This separation was a main line of evidence for CGS postulation of a possible "Argyle Strand fault." However, rather than fault caused, the "offset" water stems from perching on separate clayey mud- and debris-flows.

The trenches also show that the Argyle Channel sediments typically incise older deposits a few to locally several ft. Thus, without the benefit of trench exposures, charcoal obtained from continuous cores on the adjacent (Site 1) property, the consultants-of-record found that several radiocarbon ages were stratigraphic inverted, thus lowering their confidence to date on-site sediments.

Appendix B

Page 13

The Yucca trenches also provide “calibration” to more confidently identify the lithology and grain size and to correlate sediments in adjacent continuous cores and CPT transects. The GDC trench logs and extrapolation to adjacent and logs show that the Argyle Channel overlapping sediments and the underlying clay marker-bed are continuous and unbroken by any fault. Accordingly, if an Argyle Strand of the Hollywood fault truly exists, last surface displacement occurred prior to at least ~30 ka ago.

REFERENCES CITED

- Birkeland, P. W., 1999, *Soils and geomorphology* (third edition), Oxford Univ., Press, New York, 430 p.
- Eppes, M. C., McFadden, L. D., Matti, J., and Powell, R., 2002, Influence of soil development on the geomorphologic evolution of landscapes: An example from the Transverse Ranges of California: *Geology*, v. 30, no.3, p. 195-198.
- Group Delta Consultants, 2006, Preliminary geotechnical report, proposed high rise residential development, 6230 Yucca Street, Hollywood, California: for Second Street Ventures (Marina del Rey, California).
- Harden, J. W., 1982, A quantitative index of soil development from field descriptions: examples from a chronosequence in central California: *Geoderma*, v. 28, p.1-28.
- Hernandez, J., and Treiman, J., 2014, The Hollywood fault in the Hollywood 7.5' Quadrangle, California: California Geological Survey Fault Evaluation Report (FER) 253.
- Langan Engineering and Environmental Services (Irvine, CA), 2012, Fault investigation report for the Hollywood development, vesting tentative Tract 71837: 1720-1770 N. Vine Street, 1745-1753 N. Vine Street, 6236-6334 W. Yucca Street, 1733-1741 N. Argyle Avenue [and] 1746-1764 N. Ivar Street, Hollywood, California (prepared for Millennium Partners, San Francisco, CA), 15 p., Plates, Tables, Appendices.
- McFadden, L. D., 1989, Climatic influences on rates and processes of soil development in Quaternary deposits of southern California: *Geological Society of America Special Paper* 216, p. 153-178.

- Pigatti, J. S., Quade, J., Wilson, J., Jull, A. J. T., and Lifton, N. A., 2007, Development of low-background vacuum extraction and graphitization systems for radiocarbon dating of old (40-60 ka) samples: *Quaternary International*, v. 16, p. 4-14.
- Schaetzl, R., and Anderson, S., 2005, *Soils: genesis and geomorphology*, Cambridge Univ. Press., New York, 817 p.
- Shleman, R. J., 1985, Application of soil-stratigraphic techniques to engineering geology: *Bull. Assoc. Engineering Geologists*, v. XXII, no 2, p. 129-142.
- Soil Survey Division Staff, 1993, *Soil survey manual*: Soil Conservation Service, U.S. Dept. Agriculture Handbook 18, Government Printing Office, Washington, DC, 7 Chapters, 437 p. (references and appendices individually paginated).
- Soil Survey Staff, 1999, *Soil taxonomy (second edition)*: U.S. Dept. of Agriculture, Natural Resources Conservation Service, Agriculture Handbook 436, U.S. Govt. Printing Office, Washington, DC., 871 p.

Appendix B

Page 15

TABLE 1

Soil-Stratigraphic Measurements and Descriptions

GDC "Yucca Street" Trench, West Wall, Station 0+55; and Basal "Trench Box,"
Station 0+35

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
0.0 – 0.8	"Af"	Artificial Fill: Un-engineered fill; asphalt and bottle fragments; organic material.
0.8 – 1.5	A-B	Brown to dark brown (10YR 4/3) to very dark grayish brown (10YR 3/2) when moist loamy medium sand; moderate medium angular blocky structure; slightly hard, slightly firm, non-sticky and non-plastic; few to common fine vertical roots; few to common granitic clasts to 1.5-in dia., gradual wavy boundary.
1.5 – 1.9	Bw1	Yellowish brown (10YR 5/4) to brown to dark brown (10YR 4/3) when moist silty medium sand; weak fine subangular blocky structure to massive; very hard, very firm, non-sticky and non-plastic; few very fine vertical roots; locally few to common subrounded to angular clasts to 0.5-1.0 in long dia; gradual wavy boundary.
1.9 – 2.3	Bw2	Yellowish brown (10YR 5/4) to yellowish brown (10YR 5/6) when moist silty fine sand; weak to fine subangular blocky structure; extremely hard to locally very firm; few very fine vertical roots; gradual wavy to abrupt wavy boundary (base of cambic horizon).
2.3 – 3.8	C1	Brownish yellow (10YR 6/6) to yellowish brown (10YR 5/4) when moist gravelly coarse sand; massive loose, non-sticky and non-plastic; many angular clasts to ~3-in long diameter; many subrounded pebbles to ~0.8-in dia; abrupt wavy boundary (base of grossly fining-upward channel deposits; laterally discontinuous; unconformity).
3.8 – 4.6	2Bw1b	Buried Paleosol (very slightly developed): Yellowish brown (10YR 5/6) to dark yellowish brown (10YR 5/4) when moist fine to medium sand; weak subangular blocky structure; hard, friable, non-sticky and non-plastic; few subrounded pebbles to ~0.5-in dia., abrupt smooth to abrupt wavy boundary.
4.6 – 5.2	2Bw2b	Dark yellowish brown (10YR 4/6) dark yellowish brown (10YR 3/6) when moist loamy fine sand; weak to moderate subangular blocky structure; slightly hard, firm, slightly sticky and non-plastic; gradual wavy boundary.

Appendix B
Page 16

Table 1 (continued)

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
5.2 – 6.0	2C1b	Pale Brown (10YR 6/3) to dark yellowish brown (10YR 3/4) when moist medium to coarse sand; moderate to fine coarse blocky structure; extremely hard, firm to friable; non-sticky and non-plastic; subrounded clasts to 1-in dia.; gradual wavy boundary.
6.0 – 6.3	2C2b	Yellowish brown (10YR 5/6) to dark yellowish brown (10YR 4/4) when moist coarse loamy sand; massive; loose, friable, non-sticky and non-plastic; few subrounded clasts to 1-in. dia., gradual wavy boundary.
6.3 – 7.0	2C3b	Brownish yellow (10YR6/6) to dark yellowish brown (10YR 4/4) when moist gravelly coarse sand; structureless (loose), very friable; non-sticky and non-plastic; common to many subangular and angular clasts to 2-in dia., base of grossly fining-upward sequence; abrupt wavy boundary.
7.0 – 7.8	2C4b	Dark yellowish brown (10YR 4/6) to strong brown (7.5YR 4/6) when moist coarse sand; massive to weak, fine angular blocky structure; soft, friable, non-sticky and non-plastic; very few angular clasts 0.5 to 1.0-in dia., few to common subrounded clasts to 1-in. dia. near base; abrupt wavy boundary (unconformity).
7.8 – 8.2	3Btb	Buried Paleosol (slightly developed): Yellowish brown (10YR 5/6) to strong brown (7.5YR 4/6) when moist loamy fine sand; moderate medium angular blocky structure; slightly hard to hard, firm non-sticky and slightly plastic; few very fine clay films bridging mineral grains and lining ped faces; abrupt smooth boundary.
8.2 – 10.4	3Cb	Light yellowish brown (10YR 6/4) to dark yellowish brown (10YR 4/4) when moist coarse sand; massive structure; loose, very friable, non-sticky and non-plastic; local gravel lenses to 1.5-in thickness; gravel lenses and horizontal stringers of interbedded sand and gravel; laterally discontinuous; poorly sorted; medium energy environment of deposition; abrupt wavy to abrupt irregular boundary (unconformity).
10.4 – 12.6	4Bt1b	Buried Paleosol (slightly developed): Brownish yellow (10YR 6/6) to dark yellowish brown (10YR 4/6) when moist moderate very fine subangular blocky structure in clayey lenses; friable,

Table 1 (continued)

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
		slightly sticky; non-plastic; few very fine dark yellowish brown (10YR 4/4) clay films lining ped faces and bridging mineral grains; locally few to common pebble lenses 0.5 to 1.0 in thick laterally increasing in width; locally discontinuous; local isolated, very angular clasts to 2-in. dia., abrupt wavy boundary
12.6 – 13.4	4Bt2b	Dark yellowish brown (10YR 4/4) to dark yellowish brown (10YR 3/4) when moist pebbly clay loam; moderate to strong very angular blocky structure; very hard, very firm, slightly sticky and slightly plastic; few very fine dark brown (10YR 3/3) clay films lining ped faces and bridging mineral grains; few to common fine roots and vertical pores; local sand and pebble lenses near base to 2-in. thick; laterally discontinuous; top of grossly fining-upward sequence; gradual to locally abrupt smooth lower boundary.
13.4 – 14.5	4Bt3b	Dark yellowish brown (10YR 4/4) to dark yellowish brown (10YR 3/4) when moist pebbly loamy sand; weak to moderate angular blocky structure; slightly hard to hard, firm, slightly sticky and plastic; few very fine vertical roots; few very fine clay films lining ped faces and bridging mineral grains; few disseminated detrital charcoal fragments to 0.2-in dia., throughout horizon (see notes), collected near base; few to common pebbly gravel lenses increasing near base; few lenticular subrounded to rounded clasts to 2-in. dia. throughout horizon; abrupt wavy boundary (unconformity).
14.5 – 15.0	5tb	Buried Paleosol (slightly developed): Yellowish brown (10YR 5/6) to dark yellowish brown (10YR 3/6) when moist pebbly loamy clay; moderate medium angular blocky structure; hard, firm to friable, non-sticky and slightly plastic; few thin lenticular clay lenses; locally few very fine dark yellowish brown (10YR 4/4) clay films lining ped faces and bridging mineral grains; united truncated gradual wavy to abrupt wavy boundary.
15.0 – 18.4	5C1b	Yellowish brown (10YR 5/8) to dark yellowish brown (10YR 4/6) when moist medium coarse sand; massive structure; very friable, loose; non-sticky and non-plastic; coarsening near base; gradual smooth to locally abrupt boundary.
18.4 – 18.8	5C2b	Dark yellowish brown (10YR 4/6) to dark yellowish brown (10YR 3/4) silty clay; weak to moderate angular blocky structure; hard very firm, slightly sticky and slightly plastic; laterally extensive marker horizon; thickness variable 2-3 in., continuous unbroken unit below base of locally incised channel

Appendix B

Page 18

Table 1 (continued)

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
		gravels and laminated sand); gradual wavy boundary; base of trench wall measured section approximately 6-ft above trench base at Sta. 0+55.

Notes (*Trench Wall exposures, Sta. 0+55*):

1. Soil profile measurement by RJS and SK, 13 February 2014; GDC "Yucca Trench, west wall; Station 0+55.
 2. The surface and four very slightly to slightly developed buried paleosols cap grossly fining-upward sequences; typified by cambic (Bwb) or by cumulic, "weak" argillic (Btb) horizons. Buried paleosols, in generally coarse-grained parent material, each represent ~1-2 k of relative landscape stability soil weathering.
 3. Trench exposes thalweg of SW-trending fluvial channel deposits and interbedded paleosols at ~25 ft. Main paleo-channel contains multiple, laterally discontinuous bar and channel sediments; grossly fining upward, and each capped by a truncated buried paleosol.
 4. Present geomorphic setting, stratigraphic position and onset of basal channel-gravel deposition implies formation under a more "pluvial" climate; conservatively estimated to be during oxygen-isotope stage 2, ~12-16 ka ago.
 5. Cumulatively, the surface and the four buried paleosols represent ~8-10 ka of weathering.
-

TABLE 2
GDC Yucca Soil Profile Measurement and Description in “Box Trench”
(~6-ft below base of “18.4-18.8-ft depth horizon;” Sta. 0+35)

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
25.0 – 25.5	6Bt1b	Buried Paleosol (truncated; slightly to moderately developed): Dark yellowish brown (10YR 3/6) to dark brown (7.5YR 3/3) when moist silty clay loam; moderate medium angular blocky structure; hard, firm, slightly sticky and slightly plastic; few to common fine dark brown (7.5YR 3/4) clay films lining ped faces; common fine root pores ; gradual diffuse boundary.
25.5 – 27.0	6Bt2b	Brown to dark brown (7.5YR 4/4) sandy clay loam; weak to moderate subangular blocky structure; soft, friable, non- sticky and slightly plastic; few very fine clay films decreasing with depth; gradual wavy boundary.
27.0 – 33.0	6Cb	Sandy loam grading downward to interbedded granitic clast lenses to 0.5-in. dia., increasing at base; base of Trench Box exposure.

Notes (*Box cut at base of trench; sta. 0+35*):

1. Soil measured and described by RJS, 29 March 2014.
2. Basal clay is truncated by overlying, high-energy channel deposits; only remnant buried paleosol is preserved (slightly to moderately developed with argillic [6Bt1b/6Bt2b] horizons).
3. Buried paleosol is estimated to conservatively represent ~8-10 ka of weathering. The clay parent material is a regional stratigraphic marker, exposed continuously at the base of GDC “Yucca Box Trench” and identified in adjacent continuous cores.
4. Cumulatively, the “Box Trench” soil and the overlying paleosols within the overlying channel gravels represent – at a minimum ~16-20 ka of weathering.

Table 3

**Soil-Stratigraphic Measurement and Description,
GDC East Trench, East Wall, Station 0+60**

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
0.0 - 0.7	C1	Brown to dark brown (10YR 4/3) to dark yellowish brown (10YR 3/4) when moist gravely sandy clay loam; weak medium subangular blocky structure; extremely hard, extremely firm, locally friable, slightly sticky and slightly plastic; common angular clasts to 2-in dia. near base; abrupt wavy boundary.
0.7 – 2.0	C2	Dark yellowish brown (10YR 4/4) to dark yellowish brown (10YR 3/4) when moist sandy clay loam; massive structure; very hard and very firm; slightly sticky and slightly plastic; common angular clasts to 2.0 in dia. near base; few detrital charcoal fragments near base; abrupt wavy boundary.
2.0 – 2.9	C3	Yellowish brown (10YR 5/4) to dark yellowish brown (10YR 3/6) when moist fine gravely silt loam; massive to weak fine angular blocky structure; extremely hard, extremely firm; slightly sticky and slightly plastic; few to common angular clasts to 0.2 in dia. near base; abrupt smooth boundary (unconformity).
2.9 – 3.9	2B1b	Buried Paleosol: Brown to dark brown (7.5YR 4/4) to strong brown (7.5YR 4/6) when moist loamy clay; massive to weak fine subangular blocky structure; very hard, very firm, sticky and plastic; few very fine dark brown (7.5YR 3/4) clay films lining ped faces and bridging mineral grains; parent material = mudflow; upper horizon truncated; abrupt wavy boundary.
3.9 – 4.8	2B2b	Yellowish brown (10YR 5/6) to dark yellowish brown (10YR 4/6) when moist silty clay; moderate to strong fine angular blocky structure; extremely hard, extremely firm; sticky and very plastic; few very fine rootlets along ped faces; few, very fine yellowish brown (10YR 5/4) clay films along ped faces decreasing near base; parent material = local mud and debris flow; abrupt wavy boundary.
4.8 – 5.4	2Cb	Pale brown (10YR 6/3) to brown (10YR 5/3) when moist sandy loamy clay; massive structure; very hard, very firm; slightly sticky and slightly plastic; abrupt wavy boundary (unconformity).
5.4 – 5.8	3B1b	Buried Paleosol: Yellowish brown (10YR 5/6) to strong brown (7.5YR 5/6) when moist fine sandy clay loam; moderate medium blocky structure; extremely hard, extremely firm, slightly sticky and slightly plastic; very few strong brown (7.5YR 5/8) clay films

Table 3 (continued)

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
		lining ped faces and bridging mineral grains; parent material = mudflow bearing a moderately developed buried paleosol; gradual wavy boundary.
5.8 – 6.3	3B2b	Yellowish brown (10YR 5/6) to strong brown (7.5YR 5/6) medium to coarse angular sand; massive structure; extremely hard; extremely firm; non-sticky and non-plastic; gradual wavy boundary.
6.3 – 7.1	3B3b	Yellowish brown (10YR 5/6) to strong brown (7.5YR 5/6) when moist medium sandy loam; massive structure; extremely hard; extremely firm; non-sticky and non-plastic; gradual smooth boundary.
7.1 – 7.6	3C1b	Yellow (10YR 7/6) to brownish yellow (10YR 6/6) when moist fine sandy loamy clay; massive structure; extremely hard; extremely firm; non-sticky and non-plastic; gradual smooth boundary.
7.6 – 8.2	3C2b	Brownish yellow (10YR 6/8) to brownish yellow (10YR 6/6) when moist medium sandy clay loam; massive structure; extremely hard, extremely firm; non-sticky and non-plastic; abrupt smooth boundary.
8.2 – 9.2	3C3b	Very pale brown (10YR 7/4) to yellowish brown (10YR 5/6) when moist stratified loamy lay to silt loam; massive structure to fine medium subangular blocky ear base; common mn staining on ped faces increasing near base; extremely hard, extremely firm; slightly sticky and slightly plastic; common matrix supported angular clasts to 0.7-in dia. (debris flow) near base of measured section; based of third wall (GDC trench log).

Table 4

**Soil-Stratigraphic Measurement and Description,
GDC East Trench, Bench 2, West Wall, Sta. 0+78**

<u>Depth (ft)</u>	<u>Horizon</u>	<u>Description</u>
0.00 – 0.15	2B1b	Brown to dark brown (7.5YR 4/3) to dark brown (7.5YR 3/3) when moist coarse sandy loam; moderate medium subangular blocky structure; hard to very hard, very firm, plastic and slightly sticky; few very fine dark brown (7.5YR 3/3) clay films lining ped faces and bridging mineral grains; gradual wavy boundary.
0.15 – 0.20	2B2b	Dark brown (7.5YR 3/3) to brown (7.5YR 5/4) when moist medium sandy loam; moderate medium subangular blocky structure; very hard, very firm, sticky and plastic; few very fine dark brown (7.5YR 3/3) clay films bridging mineral grains; gradual wavy to gradual smooth boundary.
0.20 – 0.40	2B3b	Dark reddish brown (5YR 3/4) to brown (7.5YR 5/4) when moist fine sandy clay loam; massive to weak fine subangular blocky structure; very hard, very firm, slightly sticky and plastic; few very fine brown (7.5YR 5/4) clay films lining ped faces and bridging mineral grains; few very angular clasts to 0.2-in dia., lenticular unit to 3-in thick; gradual wavy boundary.
0.40 – 0.60	2B4b	Dark brown (7.5YR 3/3) to brown (7.5YR 5/4) when moist coarse sandy clay loam; massive structure; hard, firm, sticky and plastic; few brown to dark brown (7.5YR 4/4) clay films lining ped faces and bridging mineral grains; few very angular pebbles increasing in frequency near base; gradual wavy boundary.
0.60 – 0.75	2C1b	Dark brown (10YR 3/3) to brown to dark brown (10YR 4/3) when moist sandy clay loam; massive structure; hard, firm to very firm, slightly sticky and plastic; few very angular to common subrounded clasts near base; gradual wavy to abrupt wavy boundary.
0.75 – 1.00	2C2b	Dark brown (10YR 3/3) to brown to dark brown (7.5YR 4/3) when moist pebbly clay loam; massive structure; hard, very firm, slightly sticky and plastic; few very angular pebbles to 0.1 in dia., increasing near base; gradual wavy boundary.
1.00 – 1.10	2C3b	Dark yellowish brown (10YR 3/4) to dark brown (7.5YR 3/4) when moist sandy loamy clay; massive structure; hard to very hard, very firm, slightly sticky and slightly sticky; lenticular angular pebbles to 0.1-in dia. near base; gradual wavy to angular wavy boundary.

APPENDIX C: PHOTOGRAPHS



Photo 1:

Site 3. Looking northeast. Note Champion trench between Argyle Avenue sidewalk and apartment building.



Photo 2:

Site 3 Trench. Typical older alluvium. Note the distinctive stratification that is useful for judging the presence or absence of faults.



Photo 3:

Site 3 Trench. Typical small displacement fault. Note throw. For scale, the horizontal white string lines are two feet apart.



Photo 4:

Site 2 (Eastern Trench). Flexural-slip fault within tilted (folded) older debris flow beds that are unconformably overlain by four unbroken colluvial wedges that are part of the upper Pleistocene mudflow deposit that is judged to be on the order of 40bp.